

BenQ DLP Projector

W1800

Feature Highlight

- * True 4K UHD 8.3M Pixel resolution
- * Hyper-Realistic Video Quality with projector-optimized HDR10 / HLG
- * BenQ CinematicColor™ Technology for supreme colors
- * 100% Rec.709 with optimized RGBRGB color wheel
- * Short Throw: 100 inches at 2.5 meters
- * 3D Keystone
- * 3D compatibility

Display



Display	
Projection System	DLP
DMD type	0.47"
Native Resolution	4K UHD (3840 × 2160)
Brightness	2000 ANSI Lumens
Contrast Ratio*	10,000:1
Display Color	10 Bits (1,07 billion colors)
Aspect Ratio	Native 16:9 (2 aspect ratio selectable)
Light Source	Lamp
Light Source life*	Normal 4000 hours Economic 10000 hours SmartEco 8000 hours Lamp Save 15000 hours
Optical	
Throw Ratio	1.127 - 1.46 (100" @ 2.5 m)
Zoom Ratio	1.3x ±2%
Keystone Correction	2D, (Auto)Vertical, Horizontal Keystone, Picture Rotation +/- 30°
Projection Offset	110%±3%
Projection Size (Clear Focus / Maximum)	60" ~ 200"
Audio	
Built-in Speaker	5W x I
Special Feature	
Security	Security Bar
Feature	HDR10 / HLG, 3D, 3D Keystone
Compatibility	
Resolution Support	VGA (640 x 480) to 4K UHD (3840 x 2160)
Horizontal Frequency	15K-135KHz
Vertical Scan Rate	23-240Hz
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p
Video Compatibility	N/A
Power	
Power Comsumption(Max/Normal/Eco)	380W/310W/215W
Standby Power Comsumption	< 0.5W Max. at 100 ~ 240VAC
Power Supply	VAC 100 ~ 240 (50/60Hz)
Dimension and Weight	
-	
Product Dimensions (WxHxD)	312mm x 110mm x 246mm (w/ adjustment feet)
Product Weight	3.1kg
Operation Condition	
Noise Level(Normal/Eco)	34/28 dBA
Operating Temperature	0~40 degrees (Celcius)
Accessories	
Accessories (Standard)	Remote Control w/ Battery x I (RCV017) Power Cord (by region) x I(1.8m) Quick Start Guide Warranty Card (by region)
Accessories (Optional)	BenQ HDMI Video Streaming (QS01) × 1 (5J.JH314.001) Spare Lamp Kit (5J.JNL05.001) 3D Glasses
OSD	
On Screen Display Language	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (30 Languages)
Environment Notice	
	ns and usage. Actual product's features and specifications are subject to change without notice.
** The Contrast is measure by Full On Full Off standard. ***In 3D Mode: Resolution is 1920x1080 in 3D Mode	

Resolution is 1920x1080 in 3D Mode.




Connectivity



Installation

Diagonal Min distance	Average 859 1145 1432 1718 2004 2291 2577	Max distance (with min zoom) 970 1293 1616 1939 2263 2586	Vertical offset (mm) 37 50 62 62 75 87 87 100
Inch mm (with max 200m) 30 762 374 664 748 40 1016 498 886 998 50 1270 623 1107 1247 60 1524 747 1328 1497 70 1778 872 1550 1746	859 1145 1432 1718 2004 2291	970 1293 1616 1939 2263	37 50 62 75 87
40 1016 498 886 998 50 1270 623 1107 1247 60 1524 747 1328 1497 70 1778 872 1550 1746	1145 1432 1718 2004 2291	1293 1616 1939 2263	50 62 75 87
50 1270 623 1107 1247 60 1524 747 1328 1497 70 1778 872 1550 1746	1432 1718 2004 2291	1616 1939 2263	62 75 87
60 1524 747 1328 1497 70 1778 872 1550 1746	1718 2004 2291	1939 2263	75 87
70 1778 872 1550 1746	2004 2291	2263	87
	2291		
80 2032 996 1771 1996		2586	100
	2577		
90 2286 1121 1992 2245		2909	112
100 2540 1245 2214 2495	2864	3232	125
110 2794 1370 2435 2744	3150	3555	137
120 3048 1494 2657 2994	3436	3879	149
130 3302 1619 2878 3243	3723	4202	162
140 3556 1743 3099 3493	4009	4525	174
150 3810 1868 3321 3742	4295	4848	187
160 4064 1992 3542 3992	4582	5171	199
170 4318 2117 3763 4241	4868	5495	212
180 4572 2241 3985 4491	5154	5818	224
190 4826 2366 4206 4740	5441	6141	237
200 5080 2491 4428 4990	5727	6464	249
210 5334 2615 4649 5239	6013	6788	262
220 5588 2740 4870 5489	6300	7111	274
230 5842 2864 5092 5738	6586	7434	286
240 6096 2989 5313 5988	6873	7757	299
250 6350 3113 5535 6237	7159	8080	311
260 6604 3238 5756 6487	7445	8404	324
270 6858 3362 5977 6736	7732	8727	336
280 7112 3487 6199 6986	8018	9050	349
290 7366 3611 6420 7235	8304	9373	361
300 7620 3736 6641 7485	8591	9696	374

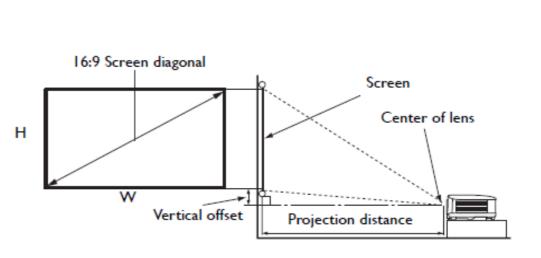

I

2





Feature icons

