

MC-EX353E

Our New Portable 3LCD Projector



PJLink™

CRESTRON

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

AMX

3LCD

Introducing our innovative portable 3LCD MC-EX353E projector which combines all our technical expertise with our market leading knowledge.

This new, portable projector can produce 3700 ANSI, has a 20,000:1 contrast ratio and has a resolution of 1024 x 768.

So whether you are on the move or in an office, our MC-EX353E portable projector is the perfect solution for today's mobile professionals. It combines simple usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

XGA 1024 x 768 resolution

3700 ANSI lumens / colour output

20,000:1 contrast ratio

Images up to 300" diagonal

Built-In lens


Filter life 10,000 hours

3 years / 6 months (for education and extended warranties please contact your local dealer)

MC-EX353E 3LCD Portable Projector

Technical Specifications

Display System	3 LCD 16mm (0.63")	Security Features	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)
Panel Structure	3LCD	Supported Languages	34 Languages (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew)
Resolution	XGA (1024 x 768)	Digital Input	HDMI x 1 (HDCP compliant)
Light Output (Brightness) ANSI Lumens (Normal)	3700 (Normal)	Analogue Input	15-pin Mini-D-Sub x 2, RCA Jack x 1
Contrast Ratio	20,000:1	Video Output	15 pin Mini D-Sub x 1 (shared with analog computer input)
Light Source Life (Hours)	6000 (Normal) / 12,500 (Eco)	Audio Input	RCA Jack (L/R) x 1
Lens	Built-in	Audio Output	3.5mm Stereo Mini Jack x 1
Number of colours	16.7 million	RS-232C Control	1 x 9-pin D-Sub
Lens Zoom	Manual zoom x 1.2	Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Lens Focus	Manual focus	Operating Power Consumption	280W
Projection Lens F Number	2.1-2.3	Standby Power Consumption	Less than 0.35W
Focus Distance	0.8 – 9.0m (Wide), 1.0 – 10.8m (Tele)	Weight	3.5kg
Distance to Width Ratio / Throw Ratio (:1)	1.5 - 1.8	Dimensions (W x H x D)	349 x 264 x 88mm
Diagonal Display Size	30 - 300"	Noise (Normal)	37dB (Normal) / 28dB (Whisper)
Installation	Ceiling, Tabletop, Rear	Filter Life (Hours)	10,000
Speakers	1W mono	Certification	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class B), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS/ErP compliant
Digital Keystone Correction (Degrees)	Horizontal ± 30°	Computer	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC16"
Picture Modes	Normal, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, Photo, DICOM SIM	Video	525i (480i), 525p (480p), 625i (576i), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51 Hz, 59 to 61 Hz), HDCR, Image blank by RS232C/Remote control, Image Optimizer, Magnify, Mirror Reverse Image, Up-side Down Image	Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Lens Cap x1, Security Label x1
Operating Features	Audio pass through, Audio ports assign, Audio out (standby) and monitor out / selectable source with MENU, Auto eco mode, Auto power off, Auto signal search, Direct power on, Image blank by RS232C/Remote control, LED lamps (power, lamp, temp), Magnify 4 times (XGA) by RS232C / remote control, MyButton by remote control, MyMemory, MySource, MyText, MyScreen, Picture freeze by RS-232C / remote control, Serial number displayed on EASY MENU and on the side of projector, Source naming (in English), Stand-by audio	Remote Control	HLC03031
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling, Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie)	Replacement Lamp, Filter	DT02081 (without Filter) / UX39561
		Projector / Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)

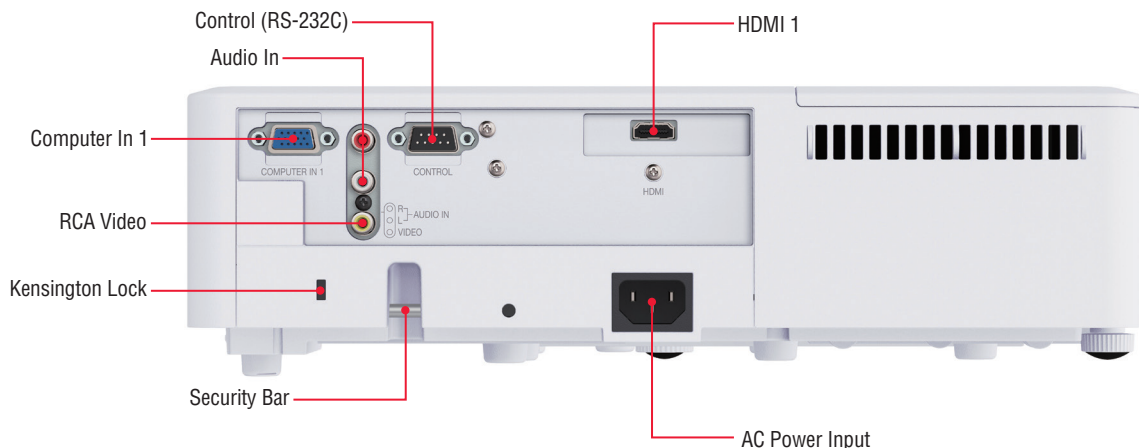

Dealer Stamp

maxell
Within, the Future

Maxell Limited

Whitebrook Park, Lower Cookham Road
Maidenhead, Berkshire, SL68YA

Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163

www.maxelldisplay.com