

MC-EX3551

Multi-purpose 3LCD Projector



PJLink™

CRESTRON

HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

AMX

3LCD

Introducing our innovative multi-purpose 3LCD MC-EX3551 projector which combines all our technical expertise with our market leading knowledge.

This multi-purpose projector can produce 3700 ANSI, has a 20,000:1 contrast ratio and a resolution of 1024 x 768.

So whether you are on the move or in an office, our MC-EX3551 multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

XGA 1024 x 768 resolution

3700 ANSI lumens / colour light output

20,000:1 contrast ratio

Images up to 300" diagonal

Built-In lens

Filter life 10,000 hours

3 year / 6 month warranty*

Please note: Content, technical specifications and images are subject to change.


*For education and extended warranties please contact your local dealer.

MC-EX3551 3LCD Projector

Technical Specifications

Panel Size	3LCD 16mm (0.63")
Panel Structure	3LCD
Light Source	Lamp
Resolution	XGA (1024 x 768)
Light Output (Brightness) ANSI Lumens	3700 (Normal)
Contrast Ratio	20000:1
Lamp Life (Hours)	6000 (Normal), 12500 (Eco)
Number of colours	16.7 million colours
Lens	Built in
Lens Zoom	Manual Zoom x 1.2
Lens Focus	Manual Focus
Projection Lens F Number	2.1 – 2.3
Focus Distance	0.8 – 9.0 m (Wide), 1.0 – 10.8 m (Tele)
Distance to Width Ratio/Throw Ratio (:1)	1.5 – 1.8
Diagonal Display Size	30 – 300"
Installation	Ceiling, Tabletop, Rear
Speakers	16W Mono
Digital Keystone Correction (Degrees)	Horizontal ± 30°, Vertical ± 30°
Picture Modes	Normal, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, Photo, DICOM SIM
Picture Adjustments	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Image optimizer, Magnify, Mirror reverse image, Up-side down image
Operating Features	Audio pass through, Audio ports assign, Audio out (stand-by) and monitor out / selectable source with MENU, Auto eco mode, Auto power off, Auto signal search, Direct power on, Image blank by RS232C/Remote control, LED lamps (power, lamp, temp), Magnify 4 times (XGA) by RS232C / remote control, MyButton by remote control, MyMemory, MySource, MyText, MyScreen, Picture freeze by RS-232C / remote control, Serial number displayed on EASY MENU and on the side of projector, Source naming (in English), Stand-by audio
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie). PLink™, Projector Management via SNMP
Security	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)

On Screen Display Languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabic, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew
Digital Input	HDMI x 2 (HDCP compliant)
Analogue Input	15-pin Mini-D-Sub x 2, RCA Jack x 1
Video Output	15 pin Mini D-Sub x 1 (shared with analog computer input)
Audio Input	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
Audio Output	3.5mm Stereo Mini Jack x 1
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	USB-WL-5GM wireless adapter (optional)
Wired LAN	RJ45 connector x 1
USB- Type-A	USB Type A x 1 (PC less presentation or wireless adapter)
USB- Type-B	USB Type B x 1 (USB display or USB mouse control)
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Operating Power Consumption	310W
Standby Power Consumption	Less than 0.35W
Weight	3.5kg
Dimensions (W x H X D)	349 x 264 x 88mm
Noise (Normal)	37dB (Normal), 29dB (Eco)
Filter Life (Hours)	10,000 Hours
Certification	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class B), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS/ErP compliant
Computer	IBM Compatible VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/WSXGA+/UXGA/HD (Compressed), MAC16"
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Concise User Manual x1, Security Label x1, Lens Cover x1, Adapter Cover x1
Optional Accessories	USB wireless adapter USB-WL-5GM
Filter/Lamp	UX39561 / DT02081M (without Filter)
Remote Control	HL03037
Projector/ Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)

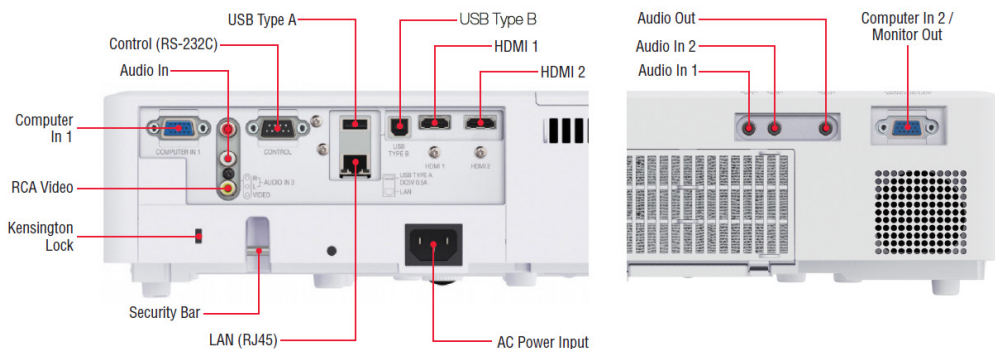

Dealer Stamp

maxell
Within the Future

Maxell Limited
Whitebrook Park, Lower Cookham Road,
Maidenhead, Berkshire SL6 8YA,
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163
www.maxelldisplay.com