

MC-WX5501

3LCD Projector



Introducing our innovative multi-purpose 3LCD MC-WX5501 projector which combines all our technical expertise with our market leading knowledge.

This model can produce 5200 ANSI, has a 16,000:1 contrast ratio and a resolution of 1280 x 800.

So whether you are on the move or in an office, our MC-WX5501 multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

WXGA 1280 x 800 resolution

5200 ANSI lumens/Colour light output

16,000:1 contrast ratio

Images up to 300" diagonal

Lens shift, HDMI out

Built In edge blending and warping

Filter life 10,000 hours


3 year/6 month warranty*

MC-WX5501 3LCD Projector

Technical Specifications

Panel Size	3LCD 15mm (0.59")
Panel Structure	3LCD
Resolution	WXGA (1280 x 800)
Light Output (Brightness) ANSI Lumens	5200 (Normal), 3640 (Eco)
Contrast Ratio	16,000:1
Lamp Life (Hours)	4000 (Normal), 6000 (Eco)
Lens	Built-in
Number of Colours	16.7 million colours
Lens Zoom	Manual Zoom x 1.6
Lens Shift	Manual
Lens Focus	Manual Focus
Lens Shift	Vertical 0 – +50% (1:1 – 10:0); Horizontal +/-5% (1.22:1 – 1:1.22)
Projection Lens F Number	18.2 ~ 29.4 mm
Focus Distance	0.9 – 14.8m
Distance to Width Ratio / Throw Ratio (:1)	1.4 (Wide), 2.3 (Tele)
Diagonal Display Size	30 – 300"
Speakers	16W mono
Digital Keystone Correction (Degrees)	Horizontal ± 30°, Vertical ± 30°
Picture Modes	Standard, Natural, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim
Picture Adjustments	Eco Mode (Normal, Eco), Equalizing colour temperature adjustment, Equalizing digital gamma correction, Magnify 4x times (WXGA) by RS232C/Remote control, Mirror reverse image, Up-side down image
Operating Features	Accentualizer technology, Cloning function, DICOM simulation, Edge blending, HDCR (High Dynamic Contrast Range), Image Optimiser, Instant stack, Picture Shift, PbyP, PinP, Warping
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling, Crestron RoomView® (Not accessible through the wireless adapter), Displaying text data transferred via network, Failure and Warning Alerts via E-mail, My Image (still image transfer) Display, Network Bridge, Network Presentation (PC still picture transfer), Frame rate (practical) is under 12fps (640x480 movie) ----- reference purpose only, PjLink™, Projector Management via SNMP
Security Features	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)

Supported Languages	34 Languages (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkey, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew)
Digital Input	HDMI x 2
Analogue Input	15 pin Mini D-Sub x 2, RCA Jack x 1
Video Output	15 pin Mini D-Sub x 1, HDMI x 1 (Supporting HDCP decoding)
Audio Input	3.5mm Stereo Mini Jack x1, RCA Jack (L/R) x 1
Audio Output	3.5mm Stereo Mini Jack x 1
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	USB-WL-11N wireless adaptor (optional)
Wired LAN	Yes
USB Type A	Used for wireless network
USB Type B	No
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Operating Power Consumption	420W
Standby Power Consumption	Less than 0.5W
Weight	6.8Kg
Dimensions (W x H x D)	460 x 138 x 334mm
Noise (Normal)	38dB (Normal), 29dB (Eco)
Filter Life (Hours)	10,000 Hours
Certification	CE Marking, EN61000-3-2, EN61000-3-3, EN55022 (class A), EN55024(EMC directive) EN60950-1 (Low voltage directive) WEEE/RoHS/ErP(lot6) compliant
Computer	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+/SXGA/SXGA+/WSXGA+/UXGA/WUXGA, MAC16"
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1080p (1080p@50/60)
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (1.8m) x1, IR Remote Control Unit x1, Security Label x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Adapter Cover x1, HDMI Cable Holder x3, Cable Ties x3, Cable Tie for Power Cord x1, Hook Metal x1, Screw x1, Lens Cap x1
Optional Accessories	USB wireless adapter USB-WL-11N, Installation remote (HL02806)
Remote Control	HLO3037
Replacement Lamp / Filter	DT01931, UX41161
Projector / Lamp Warranty	3 years/6 months (for education and extended warranties please contact your local dealer)

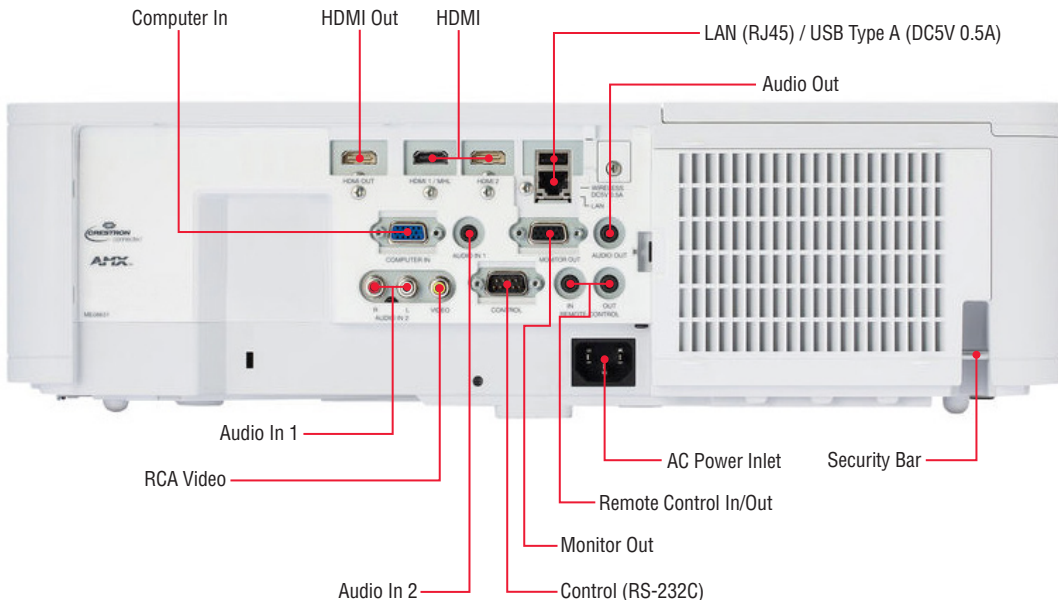

Dealer Stamp

maxell
Within, the Future

Maxell Limited
Whitebrook Park
Lower Cookham Road, Maidenhead
Berkshire, SL68YA
Tel: +44 (0)1628 585 000
Fax: +44 (0)1628 585 163
www.maxelldisplay.com

Specification and photography subject to change.