

MC-WX5505

3LCD Projector



PJLink™

CRESTRON

Extron
XTP
CERTIFIED

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

AMX

3LCD

Introducing our innovative multi-purpose 3LCD MC-WX5505 projector which combines all our technical expertise with our market leading knowledge.

This model can produce 5200 ANSI, has a 16,000:1 contrast ratio and a resolution of 1280 x 800.

So whether you are on the move or in an office, our MC-WX5505 multi-purpose projector is the perfect solution for today's professionals. It combines portability and usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

Key Features:

WXGA 1280 x 800 resolution

5,200 ANSI lumens white / colour output

16,000:1 contrast ratio

Images up to 300" diagonal

Lens Shift, HDMI out

Built In edge blending and warping

Filter life 10,000 hours

3 year / 6 month warranty*


Please note: Content, technical specifications and images are subject to change. *For education and extended warranties please contact your local dealer.

MC-WX5505 3LCD Lamp Projector

Technical Specifications

Panel Size	3LCD 15mm (0.59")
Panel Structure	3LCD
Light Source	Lamp
Resolution	WXGA (1280 x 800)
Light Output (Brightness) ANSI Lumens	5200 (Normal), 3640 (Eco)
Contrast Ratio	16,000:1
Lamp Life (Hours)	4000 (Normal), 6000 (Eco)
Number of colours	16.7 million colours
Lens	Built-in
Lens Zoom	Manual Zoom x 1.6
Lens Shift	Manual Lens Shift
Lens Focus	Manual focus
Lens Shift	Vertical 0 – +50%; Horizontal +/-5%
Projection Lens F Number	1.7 – 2.2
Focus Distance	0.9 – 9.2m (Wide), 1.4 – 14.8m (Tele)
Distance to Width Ratio/Throw Ratio (:1)	1.4 – 2.3
Diagonal Display Size	30 – 300"
Installation	Ceiling, Tabletop, Rear
Speakers	16W mono
Digital Keystone Correction (Degrees)	Horizontal ± 30°, Vertical ± 30°
Picture Modes	Standard, Natural, Cinema, Dynamic, Board (Black), Board (Green), Whiteboard, Daytime, DICOM Sim.
Picture Adjustments	Eco Mode (Normal, Eco), Equalizing colour temperature adjustment, Equalizing digital gamma correction, Magnify 4x times (WXGA) by RS232C/Remote control, Mirror reverse image, Up-side down image
Operating Features	Accentualizer technology, Cloning function, DICOM simulation, Edge blending, HDCR (High Dynamic Contrast Range), Image Optimiser, Instant stack, Picture Shift, PbyP, PinP, Warping
Network Features	AMX Device Discovery, Command Control via the Network, Configuring and Controlling the Projector via a Web Browser, Controlling the Projector via Scheduling, Crestron RoomView® (Not accessible through the wireless adapter) Displaying text data transferred via network Extron XTP system Failure and Warning Alerts via E-mail My Image (still image transfer) Display Network Bridge, Network Presentation (PC still picture transfer) Frame rate (practical) is under 12fps (640x480 movie).PJLink™ Projector Management via SNMP

Security	PIN Security Lock, MyScreen Password Lock, Transition Detector, MyText Password Lock, Key Lock (Key pad, Remote Control)
On Screen Display Languages	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabic, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew
Digital Input	HDMI x 2, HDBaseT x 1
Analogue Input	15 pin Mini D-Sub x 1, RCA Jack x 1
Video Output	15 pin Mini D-Sub x 1, HDMI x 1 (Supporting HDCP decoding)
Audio Input	3.5mm Stereo Mini Jack x1, RCA Jack (L/R) x 1
Audio Output	3.5mm Stereo Mini Jack x 1
RS-232C Control	1 x 9-pin D-Sub
Wireless LAN	USB-WL-11N wireless adaptor (optional)
Wired LAN	RJ45 connector x 1
USB- Type-A	USB Type A x 1 (wireless adapter)
Power Supply	AC 100V – 120V / AC 220V – 240V (50/60Hz)
Operating Power Consumption	420W
Standby Power Consumption	Less than 0.5W
Weight	6.8kg
Dimensions (W x H x D)	460 x 138 x 334mm
Noise (Normal)	38dB (Normal), 29dB (Eco)
Filter Life (Hours)	10,000 Hours
Certification	CE Marking: EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55024 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS/ErP compliant
Computer	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, HD, WUXGA, MAC16"
Video	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60)
Supplied Accessories	Power Cable (1.8m) x1, Computer Cable (1.8m) x1, IR Remote Control Unit x1, AA Batteries x2, Application CD (for network, etc.) x1, CD User Manual x1, Concise User Manual x1, Security Label x1, Lens Cover x1 Adapter, Cover x1, Terminal Cover x1, HDMI Cable Holder x3, Cable Tie (large x1, medium x3), Hook Metal x1, Screw x1
Optional Accessories	USB wireless adaptor USB-WL-11N, Installation remote (HL02806)
Filter/Lamp	UX41161, DT01931M
Remote Control	HL03037
Projector/ Lamp Warranty	3 years / 6 months (for education and extended warranties please contact your local dealer)

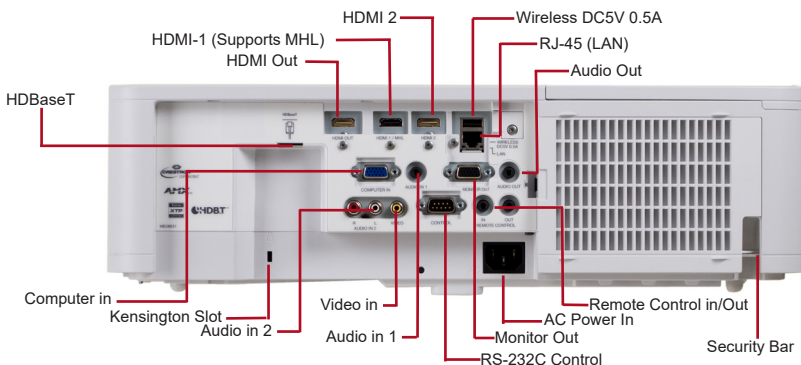

Dealer Stamp

maxell
Within the Future

Maxell Limited
Whitebrook Park, Lower Cookham Road,
Maidenhead, Berkshire SL6 8YA,
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163
www.maxelldisplay.com