

# MP-WU5503

## Introducing Our Very Latest SSL 3LCD Projector



**Introducing our innovative 3LCD MP-WU5503 projector which combines all our technical expertise with our market leading knowledge.**

This new, portable projector can produce 5,000 ANSI, has a 1,500,000:1 contrast ratio, a resolution of 1920 x 1200 and will provide 20,000 hours of maintenance-free operation.

So whatever the situation, our MP-WU5503 projector is the perfect solution for today's professionals. It combines simple usability with powerful performance in a lightweight and compact design, enabling users to set it up and get working in seconds.

### Key Features:

WUXGA 1920 x 1200 resolution

5,000 ANSI lumens white / colour output

1,500,000:1 contrast ratio

Images up to 300" diagonal

Lens Shift and HDBase T


20,000 hrs / 5 year warranty (whichever comes first)

# MP-WU5503 3LCD Laser Projector

## Technical Specifications

<b>Panel Size</b>	3LCD 16mm (0.64")
<b>Panel Structure</b>	3LCD
<b>Light Source</b>	Laser
<b>Resolution</b>	WUXGA (1920 x 1200)
<b>Light Output (Brightness) ANSI Lumens</b>	5000 (Normal)
<b>Contrast Ratio</b>	1,500,000:1
<b>Light Source Life (Hours)</b>	20,000
<b>Number of colours</b>	16.7 million colours
<b>Lens</b>	Built-in
<b>Lens Zoom</b>	Manual Zoom x 1.7
<b>Lens Shift</b>	Manual Lens Shift
<b>Lens Focus</b>	Manual focus
<b>Lens Shift</b>	Vertical 0 – +56.5% / Horizontal +/-4.6%
<b>Projection Lens F Number</b>	1.6 - 2.1
<b>Focus Distance</b>	0.8-9.1 (Wide), 1.4-15.7 (Tele)
<b>Distance to Width Ratio/Throw Ratio (:1)</b>	1.4 – 2.4
<b>Diagonal Display Size</b>	30 – 300"
<b>Installation</b>	Ceiling, Tabletop, Rear, Portrait, 360° Projection
<b>Speakers</b>	16W mono
<b>Digital Keystone Correction (Degrees)</b>	Horizontal ± 30°, Vertical ± 30°
<b>Picture Modes</b>	Standard, Natural, Cinema, Dynamic, Whiteboard, DICOM SIM, User-1, User-2, User-3
<b>Picture Adjustments</b>	ASPECT selection (Normal/4:3/16:9/16:10/14:9/Zoom/Native), Perfect Fit (4 corners and 4 sides), Frame Lock (Data signal with vertical frequency of 49 to 51Hz, 59 to 61Hz), HDCR, Image blank by RS232C/Remote control, Image optimizer, Magnify, Mirror reverse image, Up-side down image
<b>Operating Features</b>	Keystone V/H, PerfectFit, Standby audio, Audio pass through, Cloning function, Easy schedule setting, Auto power on.
<b>Network Features</b>	Wireless Capability(Optional), Multi Projector, Moderator Control Mode, Projector Quick Connection (iOS / Android app), Projector Monitoring and Control from a Remote Location, E-mail Alerts, Add: present via Live Viewer Software (Windows/Mac)

<b>Security</b>	Password/Myscreen Password, Pin Lock, Key Lock
<b>On Screen Display Languages</b>	English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Traditional Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Arabian, Persian, Czech, Danish, Hungarian, Romanian, Slovenian, Croatian, Greek, Lithuanian, Estonian, Latvian, Thai, Portuguese (Brazil), Indonesian, Vietnamese, Hebrew
<b>Digital Input</b>	HDMI x 2 (HDCP1.4 compliant) HDBaseT x1
<b>Analogue Input</b>	15-pin Mini-D-Sub x 2, RCA Jack x 1
<b>Video Output</b>	15 pin Mini D-Sub x 1 (shared with analog computer input)
<b>Audio Input</b>	3.5mm Stereo Mini Jack x 2, RCA Jack (L/R) x 1
<b>Audio Output</b>	3.5mm Stereo Mini Jack x 1
<b>RS-232C Control</b>	1 x 9-pin D-Sub
<b>Wireless LAN</b>	USB-WL-5GM wireless adaptor (optional)
<b>Wired LAN</b>	RJ45 connector x 1
<b>USB-Type-A</b>	USB Type A x 1 (wireless adaptor)
<b>Power Supply</b>	AC 100V – 120V / AC 220V – 240V (50/60Hz)
<b>Operating Power Consumption</b>	360W
<b>Standby Power Consumption</b>	Less than 0.5W
<b>Weight</b>	8.2Kg
<b>Dimensions (W x H X D)</b>	506 x 136 x 424mm
<b>Noise (Normal)</b>	32dB (Normal), 27dB (Whisper)
<b>Filter Life (Hours)</b>	20,000 Hours
<b>Certification</b>	CE Marking, EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55035 (EMC Directive), EN60950-1 (Low Voltage Directive), WEEE/RoHS compliant
<b>Computer</b>	IBM Compatible VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, HD, WUXGA, MAC16"
<b>Video</b>	525i (480i), 525p (480p), 625i (576i), 625p (576p), 1125i (1080i@50/60), 750p (720p@50/60), 1125p (1080p@50/60), 4K (3840x2160@24/25/30 4:4:4, Compressed), 4K (4096x2160@24/25/30 4:4:4, Compressed)
<b>Supplied Accessories</b>	Power Cable (1.8m) x1, Computer Cable (2m) x1, IR Remote Control Unit x1, AA Batteries x2, Concise User Manual x1, Security Label x1, Lens Cover x1, HDMI Cable Holder x2, Cable Tie (large x1, medium x2), Hook Metal x1, Screw x1
<b>Optional Accessories</b>	USB wireless adaptor USB-WL-5GM
<b>Filter/Light Source</b>	UX43581/Lamp Free
<b>Remote Control</b>	HL03037
<b>Projector/ Light Source Warranty</b>	20,000 hours / 5 years (whichever comes first) (for extended warranties please contact your local dealer)

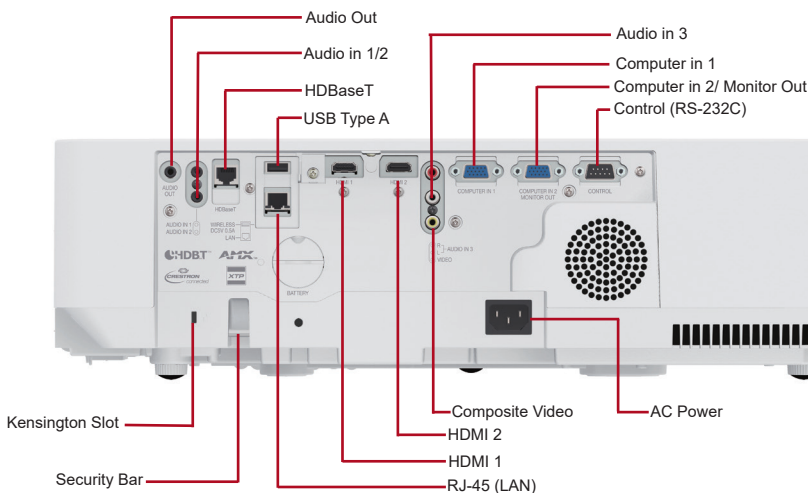

Dealer Stamp

**maxell**  
Within the Future

Maxell Limited  
Whitebrook Park, Lower Cookham Road,  
Maidenhead, Berkshire SL6 8YA,  
Tel: +44 (0)1628 585 000 / Fax: +44 (0)1628 585 163  
www.maxelldisplay.com