


ZW340e

Ultra-compact high brightness laser projector







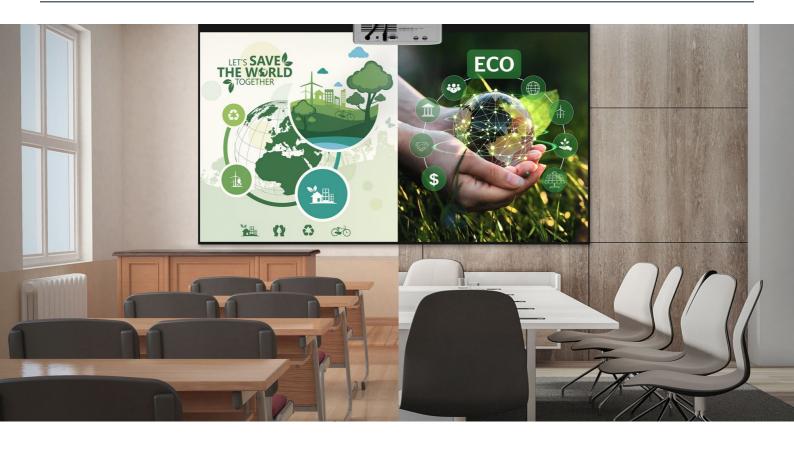

- Bright WXGA laser projector 3600 lumens and IP6X certified
- Designed with the environment in mind -DuraCore laser technology cuts power consumption and ensures a long product lifespan
- Ultra compact for easy installation 1.1x zoom, 360-degree and portrait projection
- Excellent image quality Perfect for meeting rooms, medium-sized exhibition venues, events or tradeshows



The ZW340e is one of Optoma's most compact, hassle free WXGA DuraCore laser projectors to date. This 3600-lumen projector is built for maintenance-free continuous operation up to 30,000 hours, while its small and lightweight footprint makes it 34% smaller than any other projector in the Optoma range, offering flexible installation in virtually any orientation and location.

Specifications

EAN: 5055387667426, Colour: White

UPC: 796435 44 668 0, Colour: White

Display/image Display technology

WXGA (1280x800) Resolution 3.600 lumens **Brightness** Contrast ratio 300,000:1 2,000,000:1 Contrast ratio - dynamic 16:10 Native aspect ratio 4:3 16:9 Aspect ratio - compatible Keystone correction - vertical +/-40° Yes

Has vertical auto keystone correction

Displayable colours (millions) 1073.4 Horizontal scan rate 15 ~ 140Khz Vertical scan rate 24 ~ 120Hz Uniformity 75%

0.51m ~ 7.62m (20" ~ 300") diagonal Screen size

DLP™

Lamp info Light source type

LASER life 30,000 hours

Optical Throw ratio

1.54:1 ~ 1.72:1 Projection distance (m) 1m - 10m Zoom 1.1 Zoom type Manual 21.85 ~ 24.00 Focal length (mm) Native offset 112%

Connectivity

Connections Inputs 2 x HDMI 1.4a 3D support

Outputs 1 x Audio 3.5mm, 1 x USB-A power 1.5A

Control 1 x RS232

General

Noise level (typical) 31dB Noise level (max) 34dB

PC compatibility FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac 2D compatibility NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H/I/M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480i/p, 576i/p,

720p(50/60Hz), 1080i(50/60Hz), 1080p(50/60Hz)

3D Full 3D

Security Security bar, Kensington Lock, Password protected interface

IP rating

25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, OSD / display languages Finnish, French, German, Greek, Hungarian, Indonesian, Italian,

Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional),

Turkish, Vietnamese

24/7 operation Yes

360° operation Yes

 $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$, Max. Humidity 80%, Max. Altitude 3000m Operating conditions

139W

Remote control Card style Speaker count 15W Watts per speaker AC power cord In the box

Remote control 2x AAA batteries Basic user manual UHDCast Pro

100V ~ 240V, 50-60Hz

Optional wireless models

Power Power supply

<0.5W Power consumption (standby) 88\// Power consumption (min)

Power consumption (max) Weight and dimensions

274 x 216 x 114 Dimensions (W x D x H) mm Gross weight 4.2 kg Net weight 3 kg





