




## Key Features

- 2nd Gen LED Technology with 30,000 hours lifespan
- Efficient instant power on/off
- 3,000 ANSI Lumens offering bright images in any environment
- 360° projection and H/V keystone for easy installation
- Comprehensive LAN control for efficient management




## Product Description

The LS600W is ViewSonic's first 3,000 ANSI Lumens, high brightness WXGA Lamp Free Projector for business and education. Adopting 2nd generation LED technology, it frees users from frequent lamp replacement and toxic mercury, offers an amazing 30,000 hours long lifespan, true-to-life colors with 125% Rec.709, as well as instant power on/off for efficient usage. Its comprehensive LAN control eases multiple device management and is compatible with Crestron, AMX, Extron, PJ Link, ATEN, and ViewSonic's vController. Enjoy all the amazing features this projector has to offer with hassle-free setup, 360° tilt angle projection, 1.2x zoom lens, H/V Keystone, and 4 Corner adjustment.

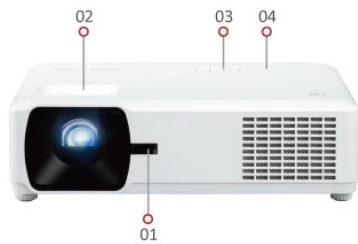

- 01. Front IR
- 02. Zoom/Focus Ring
- 03. Keypad
- 04. Top IR
- 05. Speaker
- 06. RJ-45
- 07. Audio In & Out

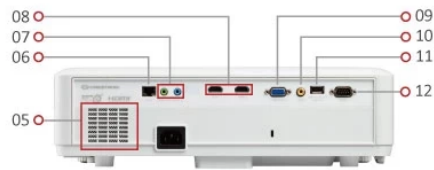

- 08. HDMI x 2
- 09. Computer In
- 10. VIDEO
- 11. USB 5V/1.5A OUT(Service)
- 12. RS-232

Visit Us [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Native Resolution:	1280x800
DMD Type:	DC3
Brightness:	3000 (ANSI Lumens)
Contrast Ratio:	3000000:1
Display Color:	1.07 Billion Colors
Light Source Type:	LED
Light Source Life (hours) with Normal Mode:	up to 30000
Lamp Watt:	RGBB LED
Lens:	F=1.6-1.75, f=19.16-23.02mm
Projection Offset:	79%+/-9%
Throw Ratio:	1.37-1.64
Optical Zoom:	1.2X
Digital Zoom:	0.8-2.0x
Image Size:	30
Throw Distance:	0.86-10.60m, (100
Keystone:	H:+/-40° , V:+/-40°
Audible Noise (Normal):	31dB
Audible Noise (Eco):	25dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

**INPUT**

Computer in (share with component):	1
Composite:	1
HDMI:	2 , (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

**OUTPUT**

Audio out (3.5mm):	1
Speaker:	10W
USB Type A (Power):	1 (5V/1.5A)

**CONTROL**

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1

**OTHERS**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz, (AC in)
Power Consumption:	Normal: 270W, Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	5kg
Dimensions (WxDxH) with Adjustment Foot:	386x276x116mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, total 23 languages
Packing Dimensions:	490x376x268mm

**STANDARD ACCESSORY**

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	Yes