



> **NEW COLOURS**


> **MORE  
BRILLIANCE**

> **LIFE-LIKE  
PICTURES**

- 4,000 ANSI-lumens
- High security by password-function and panel lock
- BrilliantColor™ and NCE 4™



Display	0.7" DMD™ Chip
Resolution	XGA 1,024 x 768
Brightness	4,000 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000:1
Projection format	4:3 switchable to 16:9
Lamp	275 W (TLPLW23)
Max. lamp life	up to max. 2,000 hours/ up to max. 3,000 hours in ECO mode
Lens	F = 2.3 - 2.47 / f = 22.97- 27.56 mm, manual focus and zoom
Zoom	1.2 x
Frequency (hor./vert.)	15 - 120 kHz / 50 - 150 Hz
Projection	front, rear and ceiling
Digital keystone correction	auto vertical +/- 40°
Picture size (diagonal)	1.02 - 7.62 m
Projection offset	100 %
Input signals	NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, 1,080p, VGA, SVGA, XGA, WXGA, SXGA, UXGA (compr.)
Inputs	1 x RGB (D-sub 15), 1 x DVI-I (HDCP), component (Y/Cb/Cr) via RGB, S-video, composite video (1 x RCA), RGB audio (2 x stereo mini jack), video / S-video audio (1 x RCA L/R)
Outputs	1 x RGB, audio (1 x stereo mini jack)
Serial interface	RS-232C (D-sub 9pin)
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	1 W mono
Dimensions (W x H x D)	338 x 128 x 280 mm
Weight	4.2 kg
Operation noise	ECO Mode 29 dB / normal 33 dB
Specials	auto setup, auto keystone correction, NCE 4™, instant shut down, buzzer, user logo capture, password, black board-function, panel lock, digital zoom, DDC compatible
Accessories	remote control with laserpointer and batteries, mouse remote receiver, softcase, owners manual (CD-ROM), RGB- and power-cable
Options	ceiling mount, spare lamp, camera c001
Menu guidance	22 languages: English, French, German, Italian, Spanish, Portuguese, Russian, Swedish, Turkish, Polish, Japanese, Chinese (simple/traditional), Korean, Indonesian, Danish, Czech, Hungarian, Dutch, Finnish, Norwegian, Greek, Rumanian

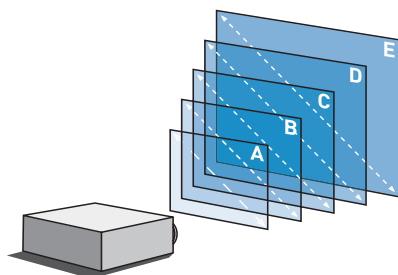

Picture size	Projection distance
1.02 m A	1.29 m
1.52 m B	1.96 - 2.36 m
2.54 m C	3.30 - 3.97 m
5.08 m D	6.65 - 7.99 m
7.62 m E	12.01 m