

# TOSHIBA

Leading Innovation >>>

| xd2700A



> MORE TO SHOW

> MORE TO SEE

> MORE TO IMPRESS

- unique image quality by NCE 3™
- high security by password-function and panel lock
- 2,700 ANSI-lumens




LCD stands for Liquid Cristal Displays  
NCE 3. Colour optimization by Toshiba for LCD projectors

# | xd2700A



Display	0.63" LCD Chip
Resolution	XGA 1,024 x 768
Brightness	2,700 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	600:1
Projection format	4:3 switchable to 16:9
Lamp	220 W (TLPLW11)
Maximal lamp life	up to max. 2,000 hours / up to 3,000 hours in Eco mode
Lens	F = 1.6 - 1.89 / f = 18.6 - 22.3 mm, manual focus and zoom
Zoom	1.2 x
Frequency (hor./vert.)	16 - 106 kHz / 50 - 85 Hz
Projection	front, rear and ceiling
Digital keystone correction	auto vertical +/- 30°
Picture size (diagonal)	0.84 - 7.62 m
Projection offset	93 %
Input signals	NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, WXGA, SXGA, UXGA (compr.)
Inputs	2 x RGB (D-sub 15), S-video, composite video (1 x RCA), RGB audio (1 x stereo mini jack), video audio (1 x RCA L/R)
Outputs	1 x RGB (D-sub 15), switch in/out, audio (1 x Stereo Mini Jack)
Serial interface	RS-232C (mini DIN 8pin)
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	1 W mono
Dimensions (W x H x D)	288 x 92 x 247 mm
Weight	2.8 kg
Operation noise	ECO Mode 29 dB / normal 34 dB
Specials	auto keystone correction, password, instant shut down, NCE 3™, panel lock, black board-function, user logo capture, digital zoom, DDC compatible
Accessories	remote control with batteries, owners manual (CD ROM), RGB- and power-cable, softcase
Options	ceiling mount, spare lamp, camera c001
Menu guidance	14 languages

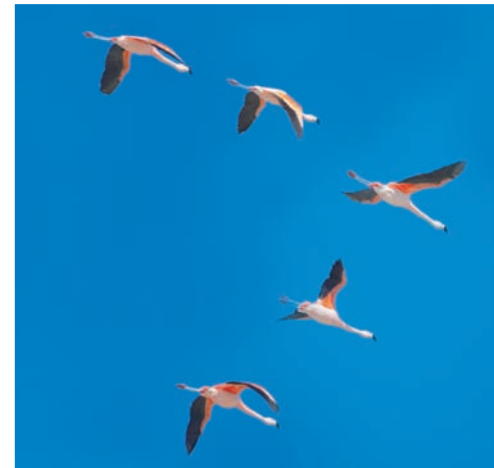

**TOSHIBA**  
Leading Innovation >>>

[www.toshiba-projectors.com](http://www.toshiba-projectors.com)

Toshiba Europe GmbH · Projection & Display Technology  
Phone: ++49-2131-158-01 · Fax: ++49-2131-158-835  
e-mail: [projektoreninfo@toshiba-teg.com](mailto:projektoreninfo@toshiba-teg.com)