





PLC-XL51

- Ultra-short Focus Projector: enabling an 80 inch projection from a distance of only 8.1 cm
- Brightness: 2,700 ANSI lumens, contrast ratio: 1,200 : 1
- Resolution, native: 1,024 x 768 (XGA), maximum: 1,600 x 1,200 (UXGA)
- Designed for horizontal & vertical installation
- Inorganic 3LCD panels ensure striking picture quality
- Network integration with LAN connector (RJ45) and integrated W-LAN
- SD card slot for PC-less presentations
- Direct Power On/Off allows switching the projector on/off without delay
- 3 years warranty, 1 year lamp warranty

PLC-XL51

TECHNICAL DETAILS	PLC-XL51
Category	Business & Education
Panel	3 x 0,8" TFT p-Si (4 : 3), micro lens
Lamp	275 W NSH (LMP-121)
Brightness in ANSI lumens	2,700
Lamp Life	3,000 h (eco mode)/2,000 h (normal mode)
Fan noise	32,6 dB (eco mode)/36,9 dB (normal mode)
Standard Lens	F = 1.85/f = 4.83 mm*
Throw Distance	-0.04 to 0.081 m
Contrast Ratio	1,200 : 1
Resolution in pixels	1,024 x 768 (XGA)
Image size min.-max. (diagonal)	60"-80"
Uniformity	80 %
Bandwidth/Frequency	140 MHz, horizontal 15-100 kHz, vertical 50-100 Hz
Colour Systems	PAL, SECAM, NTSC, NTSC4.43, PAL-M/N
Connections	Input 1: D-Sub15 (RGB/SCART RGB) Input 2: D-Sub15 (RGB/Component/SCART-RGB) or monitor out Input 3: 3 x RCA (Y-Pb/Cb-Pr/Cr) Input 4: RCA (Composite) Input 5: Mini DIN 4-pin (S-Video) Input 6: RJ45 (LAN) Audio: 3.5 mm Stereo Jack, 2 x RCA (R/L mono); Audio output: 3.5 mm Stereo Jack Control input Jack: Mini DIN 8-pin (RS232); Others: SD media slot, integrated wireless function
Audio	2 W Mono
Keystone Correction	vertical +/-5°
HDTV Compatibility	480i/480p/575i/575p/720p/1,035i/1,080i
Computer Compatibility	UXGA/SXGA/WXGA/XGA/SVGA/VGA
Zoom/Focus	-/manual
Power Consumption/Voltage	340 W (eco mode)/400 W (normal mode)/12 W (stand-by mode)/100-240 V
Warranty	3 years, 1 year lamp (max. 1,000 h)
Dimensions (W x H x D)	374 x 201 x 495 mm
Weight	7.7 kg
Standard Accessories	IR remote control, batteries, user manual, power cable, D-Sub15 cable, alarm function, PIN code label
Optional Accessories	SCART/D-Sub15 cable (POA-CA-SCART), bracket base (POA-CHB-XL50), wall mount (POA-CH-EX03), wall mount (SST Bracket-WH), ceiling mount 14 cm (POA-CHS-PS02), ceiling mount 86-143cm (POA-CHL-PL02)

* You can use the distance calculator at www.sanyo.de to determine exact image sizes and distances

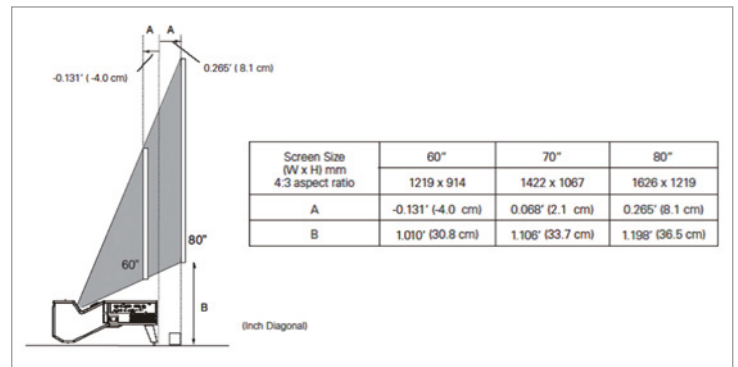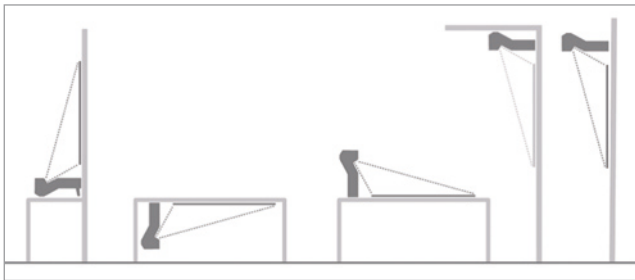

Technical specifications are subject to change without notice. Status 09/2008.

