

# TOSHIBA

Leading Innovation >>>

| x200




TOSHIBA  
TOSHIBA  
TOSHIBA

> **FINEST  
TECHNOLOGY**

> **DELUXE  
COLOURS**

> **PURE  
INNOVATION**

- Windows Vista™ Network (WLAN and LAN)
- HDMI-input
- NCE 5™-Chip

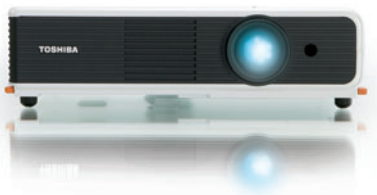

LCD stands for Liquid Cristal Displays  
NCE 5™: Colour optimization by Toshiba

Display	0.7" LCD Chip
Resolution	XGA 1,024 x 768
Brightness	3,000 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	600:1
Projection format	4:3 switchable to 16:9
Lamp	180 W (TLPLW21)
Max. lamp life	up to max. 2,000 hours/ up to max. 3,000 hours in ECO mode
Lens	F = 1.6 - 1.76 / f = 21.5- 25.8 mm, manual focus and zoom
Zoom	1.2 x
Frequency (hor./vert.)	15 - 106 kHz / 50 - 85 Hz
Projection	front, rear and ceiling
Digital keystone correction	full auto keystone vertical +/- 45°
Picture size (diagonal)	0.76 - 7.60 m
Projection offset	71 %
Input signals	NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, 1,080p, VGA, SVGA, XGA, WXGA, SXGA, UXGA (compr.)
Inputs	1 x RGB, audio, video (1 x RCA), S-video, USB, HDMI, RJ45
Outputs	1 x RGB, switch in/out, audio
Serial interface	RS-232C (D-sub 9pin), RJ45
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	1 W mono
Dimensions (W x H x D)	293 x 70 x 192 mm
Weight	2.0 kg
Operation noise	ECO Mode 28 dB / normal 32 dB
Specials	Windows Vista™ Network (WLAN and LAN), auto key- stone correction, instant shut down, user logo capture, NCE 5™, password, USB memory reader, voice guidance
Accessories	remote control with laserpointer and batteries, mouse remote receiver, softcase, owners manual (CD-ROM), RGB- and power-cable
Options	ceiling mount, spare lamp, camera c001
Menu guidance	25 languages: English, French, German, Italian, Spanish, Portuguese, Russian, Swedish, Turkish, Polish, Japan- ese, Chinese (simple/traditional), Korean, Indonesian, Danish, Czech, Hungarian, Dutch, Finnish, Norwegian, Greek, Rumanian, Thai, Arabic
Wireless communication	802.11 b/g WEP, WPA, WPA 2

