

compact 332



For mobile use



Maximum screen size for daylight projection (recommended size in cm)



Maximum room size for daylight projection (recommended size in m²)

>> Powerful

3000 ANSI lumens, enough light output for high-contrast images in small and mid-size conference rooms.

>> Flexible

With only 3.3 kg weight and a Network interface suitable either for in-house usage in different rooms in companies but also for fixed installation.

>> Easy to use

Six automatic functions for ease of use are included: automatic signal search, auto sync, ceiling sensor, keystone sensor, lamp usage and air filter alert.

>> Dust proof design

The lens is protected by a dust proof glass and an additional slide door for the zoom and focus ring. So no dust comes into the engine for long lasting image quality. For very dusty conditions an additional XXL dust filter is available.

>> Safe investment

With digital and analogue inputs the projector fits to modern and future PC graphic cards. New: Remote control and system diagnostics via network interface.

>> High security level

With password protection, Kensington slot and security anchor in the cabinet the projector is protected against theft and unauthorised use.

>> Low-maintenance device

The air filter and the lamp can be changed from the side and without having to dismantle the projector from the ceiling.






Geha compact 332

Order no.	30 207 399
Display technology	3LCD 0.63" with micro lenses
Resolution (physical)	XGA 1024 x 768 pixels, from VGA (640 x 480) to UXGA (1600 x 1200)
Brightness (norm./eco. mode) in ANSI-Lumen	3000/2400
Contrast ratio	500:1
Weight in kg	3.3
Dimensions (W x D x H) in mm	325x260x97
Noise level (full/eco)	33/30 dB
Lens system	Zoom 1.2 x manual f=18.5 to 22.2 mm/F=1.65 to 1.93
Projection distance	1.1 m to 10.60 m
Image size (diagonal)	1.00 m to 7.62m
Throw ratio (distance to image width)	1.45 to 1.74:1
Offset	5:1
Keystone correction	vert. +/-30° auto. or man.
Functions	Digital input, Digital keystone correction; suitable for ceiling installation, rear projection, digital zooming, freeze, mask, OSD; Quick start & off, User logo, Ceiling detector, password protection
Lamp	220 Watt UHP
Lamp life time (normal/economy mode)	Up to 2000 h/3000 h
Power supply	100 to 240V AC/ 50/60 Hz
Power consumption (on/stand-by)	285/<2.6 Watt
Video compatibility	PAL/SECAM/NTSC, 480i/p, 525i/p, 576i/p, 625i/p, 720p, 1080i
Horizontal frequency	31 to 92 kHz
Scanning rate	48 to 120 Hz
Bandwidth	165 MHz
Inputs	RGB 1(1 x 15 pin D-sub), Digital (1 x DVI-I), Audio (2 x 3.5 mm jack), video (1 x RCA) S-video (1 x mini-DIN 4 pin), component video (3 x RCA), audio (1 x 2 x RCA)
WLAN Specification	---
Outputs	RGB (1 x 15 pin D-sub), audio (1 x 3.5 mm jack)
RS232 port	9 pin D-sub
LAN port	RJ-45 for control and system diagnostics
Mouse port	1xUSB B
Sound system	1x8 Watt mono
Standard accessories	Projector, 1.5 m power cable, 1.5 m VGA cable, 1.5 m Video cable, s-Video cable, audio cable RCA, audio cable jack, USB-cable, full function remote control with mouse remote and laser pointer, batteries, manual on CD, quick start instruction card, carrying case
Warranty	36 months
Lamp warranty	6 months or 500 hours



Figures refer to image width x image height

All dimension in m; drawing not to scale

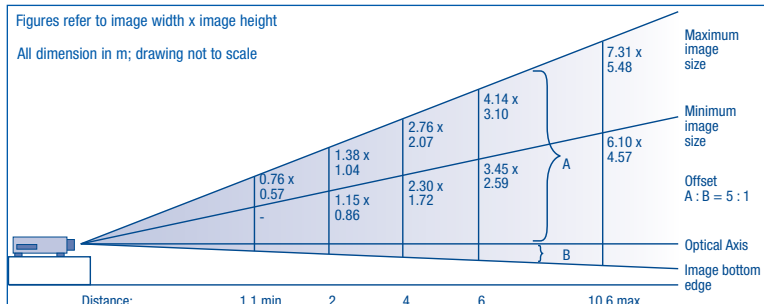

Accessories:

Order no.	Specification
30 207 431	air filter XXL for dusty rooms
60 207 530	220 W UHP lamp kit, life time up to 3,000 h (economy mode)