

SHARP

PG-MB60X
DLP Portable/Install Projector




TOTALLY VERSATILE THANKS TO ITS MULTI-PURPOSE LENS, THIS DLP PROJECTOR CAN BE USED ON A DESKTOP, OR IS EQUALLY EFFECTIVE MOUNTED ON A CEILING.


- 2500 ANSI Lumen combined with 1200:1 contrast ratio for powerful presentations in bright environments
- DLP technology for extended panel life and excellent contrast ratio
- 2 'data', plus full array of inputs for maximum connectivity
- Notevision Lock Down security feature
- Automatic Digital Keystone Correction for straightforward set up and optimum image
- Large screen projection with 60" diagonal image from just 1.8m



SPECIFICATION PG-MB60X

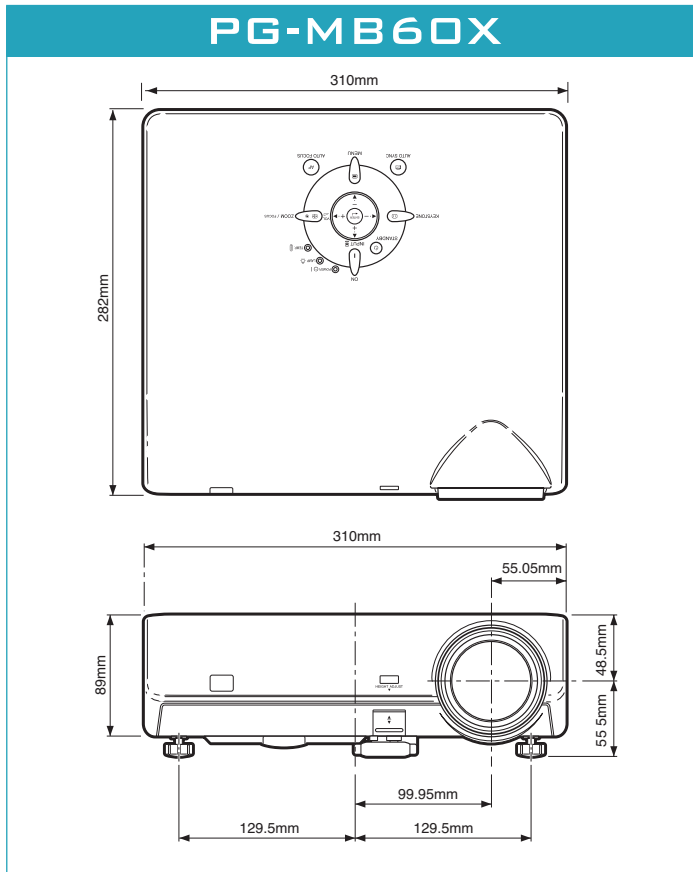

CONNECTIONS

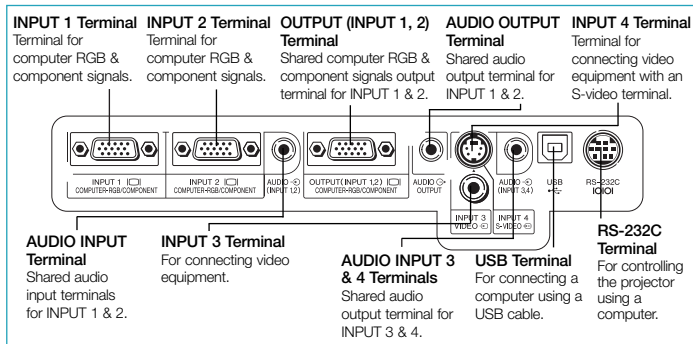

SHARP

Sharp Electronics (UK) Limited,
 Sherbourne House, Croxley Business Park,
 Watford, Hertfordshire WD18 8WT
 Telephone: 0800 138 5051
 Website: www.sharpinbusiness.co.uk

OPTICAL	
Brightness	2500 ANSI Lumens*1
Native Resolution	XGA
Lamp Life	3000 Hours*2
Contrast Ratio	1200:1
Panel Size	0.7" 12° DLP
Image Size	40" - 300"
Lens	1:1.5 powered zoom & power focus
Throw Ratio	1.48 to 2.24:1
Aspect Ratio	4:3 (16:9 switchable)
Lamp	200W
Fan Noise	30dB*3
Supported Resolutions	SXGA+, SXGA, XGA, SVGA, VGA, VESA, MAC 21"/19"/16"/13"

VIDEO SYSTEM	
Composite	PAL/PAL-60/PAL-M/PAL-N/NTSC 3.51/NTSC 4.43/SECAM
Component	DTV 480i/480P/540P/580i/580P/720P/1035i/1080i
Horizontal Resolution	550 TV Lines (video input) 750 TV Lines (DTV 720P input)
Frequency Range	Vertical: 43-85 Hz Horizontal: 15-70 kHz

PHYSICAL	
Dimensions (W x H x D)	310 x 89 x 282mm
Weight	4Kg
Audio	2W
Power Rated Voltage	100-240V AC
Power Consumption	270W

OTHER FEATURES	
Extended Zoom Capability	Ceiling Mountable
Remote Periodic Diagnosis	Active Automatic Digital Keystone Correction
2 Data Inputs	Television Lockdown Anti Theft System

SUPPLIED ACCESSORIES	
Mouse remote control (and batteries)	
Power cord	
RGB cable with USB	
Operation manual	
CD ROM technical reference & operation manual	
Carry case	

OPTIONS	
Ceiling Plate Adapter AN60TK	
High Ceiling Brace (806 - 1406mm from ceiling) ANTK201	
Low Ceiling Brace (90mm from ceiling) ANTK202	

*1 Standard mode (2000 in eco-mode) *2 Eco-mode (2000hrs in standard mode)
 ** Eco-mode (35dB in standard mode)



IMAGE SIZE & PROJECTION DISTANCE

Normal Mode (4:3)

Picture (Screen) Size			Projection Distance	
Diagonal	Width	Height	Maximum	Minimum
300" (762 cm)	240" (610 cm)	180" (457 cm)	29' 9" (9.1 m)	44' 9" (13.7 m)
250" (635 cm)	200" (508 cm)	150" (381 cm)	24' 9" (7.6 m)	37' 4" (11.4 m)
200" (508 cm)	160" (406 cm)	120" (305 cm)	19' 10" (6.0 m)	29' 10" (9.1 m)
150" (381 cm)	120" (305 cm)	90" (229 cm)	14' 10" (4.5 m)	22' 5" (6.8 m)
100" (254 cm)	80" (203 cm)	60" (152 cm)	9' 11" (3.0 m)	14' 11" (4.6 m)
84" (213 cm)	67" (171 cm)	50" (128 cm)	8' 4" (2.5 m)	12' 6" (3.8 m)
72" (183 cm)	58" (146 cm)	43" (110 cm)	7' 2" (2.2 m)	10' 9" (3.3 m)
60" (152 cm)	48" (122 cm)	36" (91 cm)	5' 11" (1.8 m)	8' 11" (2.7 m)
40" (102 cm)	32" (81 cm)	24" (61 cm)	4' 0" (1.2 m)	6' 0" (1.8 m)