

# SONY


make.believe

## Low-Maintenance Compact Projector VPL-EW130


### Key Features

- 3,000 lumens (ISO 21118)
- Native WXGA (1,280 x 800) resolution
- High contrast ratio
- BrightEra® Panel
- Long-lasting lamp
- Recommended lamp replacement time 6000h (low mode)\*\*
- Synchronized lamp and filter maintenance cycle
- ECO MODE key
- Power saving mode
- Low power consumption
- Flexible 1.3 x manual zoom standard lens
- Front exhaust
- Convenient terminals including 1xHDMI™

### Dimensions (Front) Unit: mm (inches)

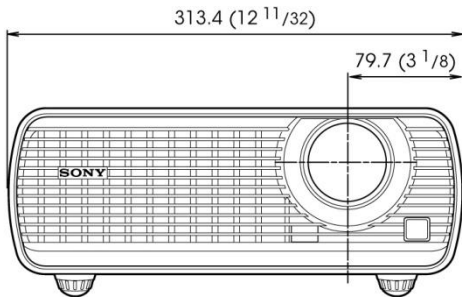

### Dimensions (Bottom)

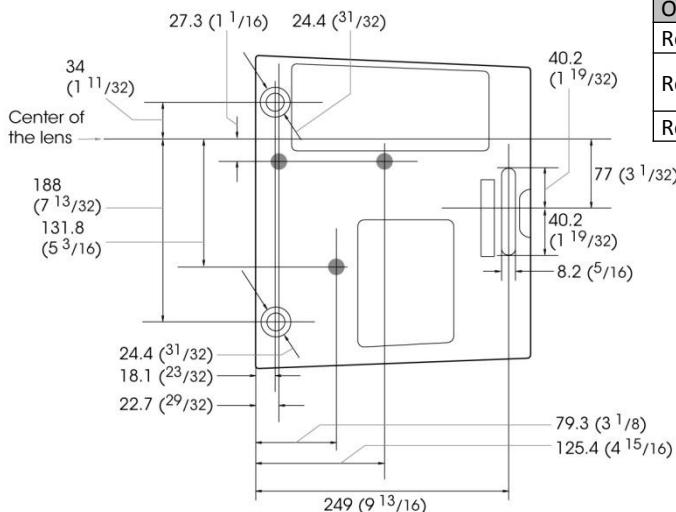

# WXGA / 3,000 lm

Optical		
Light Output / Color Light Output		3000 lumens (Lamp mode: High) 2300 lumens (Lamp mode: Standard) 1800 lumens (Lamp mode: Low)
LCD Panels		0.59" x 3 BrightEra LCD Panel
Panel Display Resolution		WXGA (1280 x 800 dots)
Contrast Ratio		2,600:1 (Full white/full black) *
Light Source		Ultra high-pressure mercury lamp 210 W type
Recommended Lamp Replacement Time**		3000H (Lamp mode: High) 4500H (Lamp mode: Standard) 6000H (Lamp mode: Low)
Filter Cleaning Cycle**		Max. 6000H Same time as the lamp replacement is recommended
Projection Lens	Zoom / Focus	Approx. 1.3x manual zoom / Manual focus
	Throw Ratio	1.40 to 1.81
Screen Size		25" to 200"
Interface		
Computer and Video Input/Output	INPUT A	Mini D-sub-15 pin (RGB / Y Pb Pr) Audio: Stereo mini jack
	INPUT B	HDMI
	VIDEO IN	Pin Jack Audio : Pin jack x2
	Monitor OUT	Mini D-sub 15-pin (from INPUT A)
	Audio OUT	Stereo mini jack (variable out)***
Other Signal Input / Output	RS-232C	D-sub 9 pin
General		
Speaker		1W x 1(monoral)
Scanning Frequency		H: 19 to 92kHz, V: 48 to 92Hz
Display Resolution	Computer Signal Input	Maximum display resolution : 1400 x 1050 dots
	Video Signal Input	NTSC, PAL, SECAM, 480/60i, 576/50i, 480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i
Color System		NTSC3.58, PAL, SECAM, NTSC4.43, PAL-M, PAL-N, PAL60
UPC Code		0 27242 82405 0
Power Requirements		AC 100V to 240V, 50Hz/60Hz
Power Consumption		290W/240W/205W (AC 100V-120V) 275W/225W/190W (AC 220V-240V)
Standby Mode Power Consumption		3W (Std) / <1.0W (Low) (AC 100-120V) 3W (Std) / <1.0W (Low) (AC 220V-240V)
Dimensions (W x H x D)		313.4 x 129.6 x 279.2 mm 12 11/32 x 5 3/32 x 11"
Mass		3.2 kg / 6lb 15 oz
Optional Accessories		
Replacement Lamp		LMP-E211
Replacement Filter		4-170-764-01 (Door) / 4-170-765-01 (Mesh) (Filters are cleanable)
Replacement Remote		1-489-222-11 (RM-PJ7)

\* The value is average.

\*\* Expected maintenance time, not guaranteed. Lamp and filter performance will vary based on operating environment and use.

\*\*\* Works as an audio switcher function. Output from a selected channel, not available in standby.

### Connector Panels

