


**TOSHIBA**

mobile **p6**

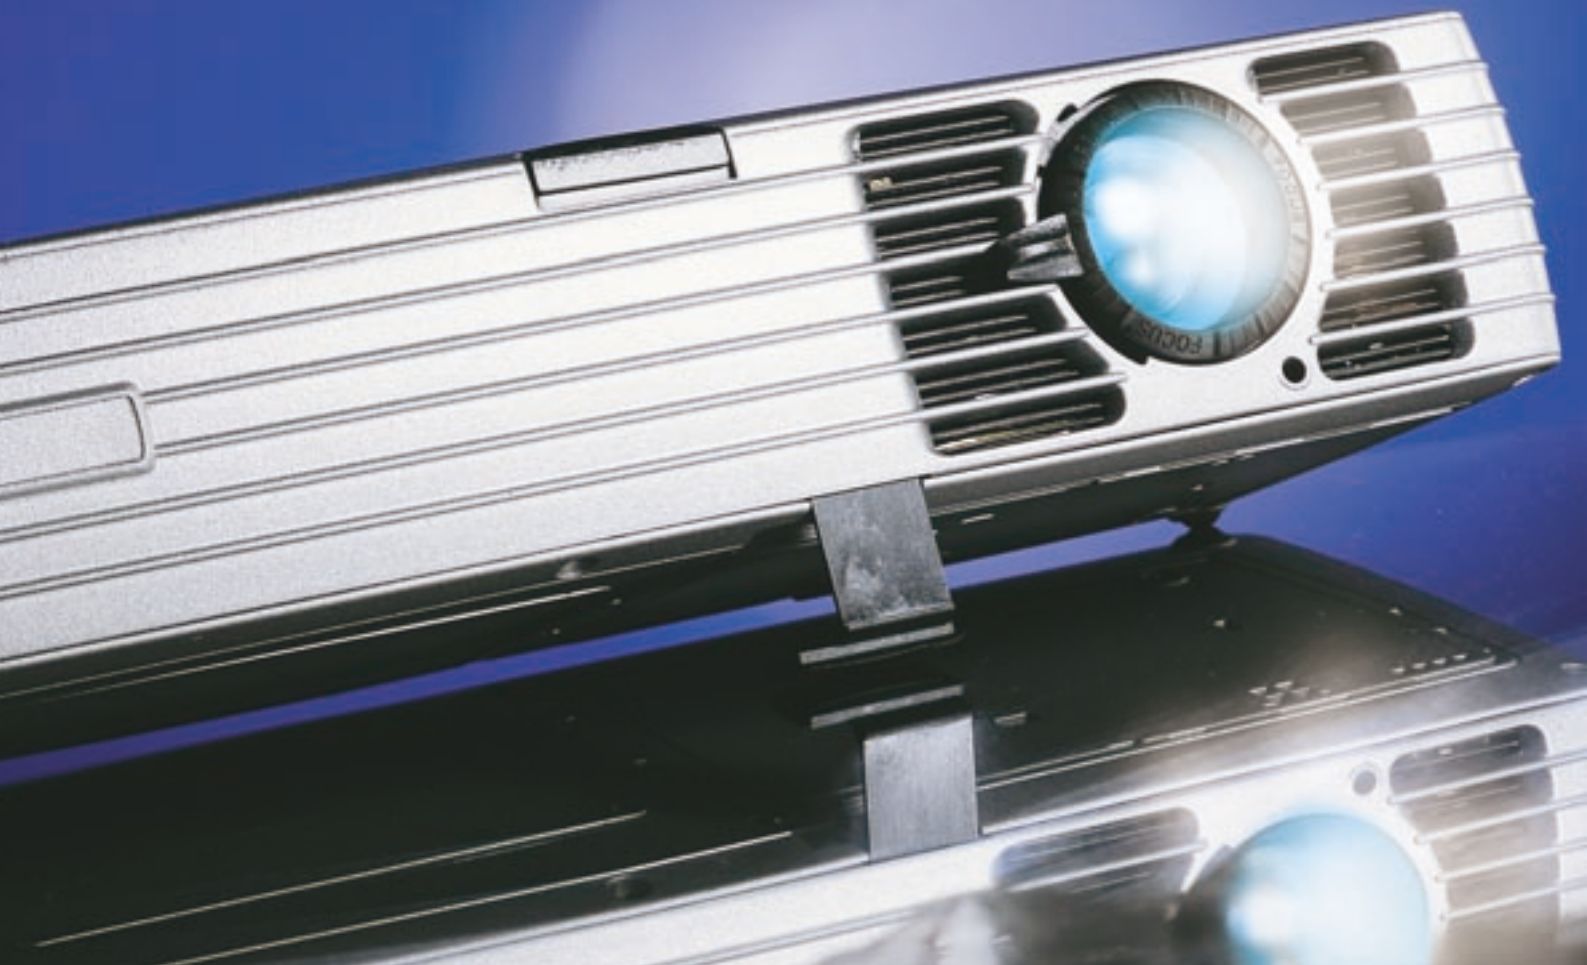

a l w a y s   o n   t h e   m o v e

2000:1 Contrast Ratio

XGA 1024 x 768

1000 Ansi Lumens

0.9kg



Toshiba's lightest projector, the P6 weighs just 900g and delivers an impressive performance outshining many of its larger XGA rivals.

Despite its size it's certainly not short on impact. A truly ultra-portable projector with a contrast ratio of 2000:1 provides outstanding image quality and brightness. Featuring DLP projection technology the P6 provides a vibrant array of over 16 million colours.


Even the mouse remote and integrated laser pointer has been enhanced to make controlling your presentation even easier.

Ease of use and quick set up times are simple thanks to the auto image set up and keystone correction features, making the P6 the ultimate choice for the on the move professional.

### Projection Distance

Diagonal screen size (inches)	40	60	80	100	150	200	250
Minimum distance (metres)	1.50	2.20	2.93	3.70	5.50	7.32	9.14
Maximum distance (metres)	1.70	2.50	3.42	4.20	6.41	8.34	10.06

### Connections

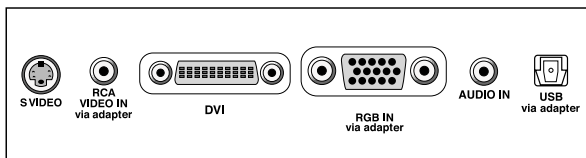

### Box Contents

Operating manual & CD-ROM,  
Audio, S-Video, M1-D/A  
and Power cables, Remote  
control, Batteries, S-Video  
to RCA input adapter,  
Audio Cable adapter,  
Softcase

### Extra Features

Ultra Portable  
Eco Mode  
Auto-Image setup  
Mouse remote with laser pointer  
High Contrast Ratio  
Over 1000 lumens per kg



### Technical Specifications

Model		P6	
Display	Display Type	DLP	
	Shape	Aspect Ratio	4:3 (16:9 Switchable)
		Size	0.7" XGA panel x 1
	Number of Pixels	786,432 pixels (1,024x768)	
	Drive Method	DDR DMD	
	Contrast Ratio	2000:1	
Resolution	Real XGA		
Image	Brightness (ANSI)	1000 lm	
	Lamp	120W TLPLP6	
	Service Life of Lamp	2000h*	
	Colour Reproduction	16.7 Million Colours	
	Colour Wheel (DLP)	Segments (Qty)	RGBW 4 Segment
		Speed	2X
	Projection Distance (m)	1.5 - 5.0m (4.9 - 16.4ft)	
	Picture Size (Diagonal)	0.9 - 3.5m (35 - 137")	
	Projection Method	Front or Rear	
Keystone Correction	Vertical	Digital (+/-7.5 degrees)	
	Horizontal	None	
Lens	Optical Zoom & Focus Methods	Manual Zoom & Focus	
	"F" Value Aperture	F = 2.8 - 3.1	
	"f" Value Focal Length	f = 25.8 - 30mm	
	Zoom Ratio	1.16 x	
	Throw Ratio	1.8 - 2.10:1	
Signal	Compatible Frequency	Horizontal (kHz)	15 - 100kHz
		Vertical (Hz)	43.5 - 130Hz
	Input Signals	Video Signal	NTSC / PAL / SECAM
		Colour Difference	HDTV & DTV, DVD
		RGB Real Display	VGA / SVGA / XGA
RGB Compressed		SXGA / UXGA	
Terminals	Input	Video Signal	1x S-Video, RCA via adapter
		Computer Signal	1 x DVI, RGB via adapter
		Audio Signal	1 x Stereo Mini Jack
		Control & Other	USB (via adapter)
	Output	None	
General	Operating Noise	37dB (34 dB Eco)	
	Embedded Speaker	1W Mono	
	Weight (kg)	0.9kg	
	Dimensions W x D x H	247 x 52 x 93	
	Power Source	AC100-240V, 50 / 60Hz	
	Power Consumption (W)	150W	
	Security	Kensington Slot	
	Warranty	Projector	3 Year RTB
Lamp		90 Days	

\* Actual lamp life may vary on ambient environment

**TOSHIBA**

TOSHIBA INFORMATION SYSTEMS (U.K.) LTD.

Professional Visual Products Division,  
Toshiba Court, Weybridge Business Park,  
Addlestone Road, Weybridge, Surrey KT15 2UL  
www.pvp.toshiba.co.uk

E&OE - Product design and specification subject to change or modification without notice.