

EIP-X5500/W4600/U4700

XGA / WXGA / WUXGA Small High End Projector

EIKI
Eiki grows with you

Brighter, more beautiful and more vivid



EIP-X5500	5500 lm	XGA(1024 x 768)
EIP-W4600	4600 lm	WXGA(1280 x 800)
EIP-U4700	4700 lm	WUXGA(1920 x 1200)

Outstanding Features

- EIKI's Brightest projector in small class, 5500/ 4600/ 4700 lumens and high contrast 2200:1
- Equipped Long Life Lamp(Normal : 3000 hrs, Eco:4000 hrs)
- Compact Design
- Versatile Digital Input Terminal Displayport x 1 , HDMI x 2
- High Reliability 24 / 7 Operability*1
- 3D Function
- Easy maintenance of Top-accessed lamp & Filter Free
- Auto Setup Function
- LAN Network
- Built-in 3-Watt Audio Speaker
- Closed Caption
- UXGA - VGA and MAC compatible
- Compatible with Crestron Room View®*2 and AMX Device Discovery System

*1.It is vital that the system is regularly maintained.

*2.The Crestron logo is registered trademarks of Crestron Electric, Inc.

■ WUXGA Resolution

EIKI's first WUXGA projector in small class(EIP-U4700).




■ High color reproduction

This projector has high color reproduction performance. It was made by EIKI's own color setting which we have experienced in LCD projectors.



EIP-X5500/W4600/U4700 XGA / WXGA / WUXGA Small High End Projector

Terminal

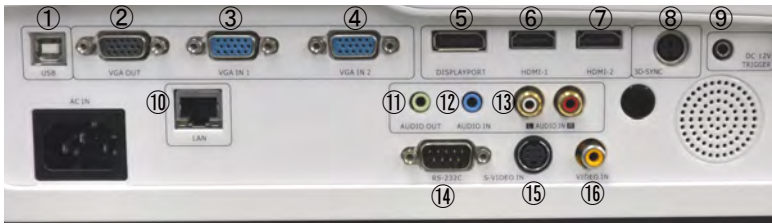

- ① USB TypeB (Service) ② VGA Out ③ VGA In 1 ④ VGA In 2 ⑤ Displayport
- ⑥ HDMI 1 ⑦ HDMI 2 ⑧ 3D Sync ⑨ DC12V Trigger ⑩ LAN ⑪ Audio Out
- ⑫ Audio In ⑬ Audio In(L/R) ⑭ RS-232C ⑮ S-Video In ⑯ Video In

Cabinet Size



W x H x D
334.0 x 120.8 x 267 .6mm

Control Panel



Remote control



(Hg)
Lamp Contains Mercury.
Do not put in trash.
Dispose-of-as Hazardous
Waste, according to the
laws in your jurisdiction.

Specifications

Model	EIP-X5500	EIP-W4600	EIP-U4700
Panel Size	0.7" DMD	0.65" DMD	0.67" DMD
Screen Brightness (ANSI)	5,500 Lumens	4,600 Lumens	4,700 Lumens
Illumination Uniformity	80%		
Color Reproduction	1.07 billion color		
Contrast Ratio	2,200 : 1		
Estimated Lamp Life (Eco/Normal)	4,000 / 3,000 hours		
Projection Lamp	310 W		
Screen Pixels	1,024 x 768	1,280 x 800	1,920 x 1,200
Aspect Ratio	4 : 3	16:10	16:10
Lens	F = 2.6 - 2.81, f = 26.01- 29.84 mm	F = 2.51 - 2.77, f = 23.5- 28.2 mm	F = 2.5 - 2.76, f = 23.5-28.2mm
Zoom	Manual x1.15	Manual x1.2	Manual x 1.2
U / D Ratio	25 : -3	50 : -7	25 : -2
Image Diagonal	23.4" - 300"	27.6" - 300"	24.3" - 300"
Image Width	0.48 - 6.1 m	0.59 - 6.5 m	0.52 - 6.5 m
Throw Distance (Wide ~ Tele)	1.5 - 10 m	1.2 - 10 m	1 - 10 m
Throw Ratio	1.8 - 2.1 : 1	1.66 - 2.02:1	1.6 - 1.92:1
Projector Elevation Adjustment	Up to 10 degrees		
Vertical Keystone Correction	Max. ± 30 degrees		
Scanning Frequency	Auto : H Sync. 15 , 31 - 91.4, 101.6 kHz, V Sync. 24 - 30, 47 - 120 Hz		
Dot Clock	150 MHz		
Image Orientation	Normal, Rear, Ceiling, Rear + Ceiling		
Local Control	Full Function		
Remote Projector Control	Wireless (Infra Red) x 1		
Computer Native Resolution	1,024 x 768	1,280 x 800	1,920 x 1,200
Computer : Compatibility	UXGA - VGA		
Computer : Formats	1,600 x 1,200 through 640 x 480		
Video : System Compatibility	NTSC / PAL / SECAM		
Video : Compatibility	480 i/p, 576 i/p, 720p, 1080 i/p		
Video : Formats Supported	4 : 3 and 16 : 9		

Model	EIP-X5500	EIP-W4600	EIP-U4700
Input Terminal	Digital	Displayport x 1 , HDMI x 2	
	VGA	D-sub15 x 2(Share with Component)	
	Composite Video	RCA x 1	
	S-Video	Min Din-4 x 1	
	PC Audio, Analog	3.5mm Mini-Stereo Jack x 1	
	AV Audio, Analog	2RCA(L/R) x 1	
Output Terminal	VGA*	D-sub15 x 1	
	Audio, Analog	3.5 mm Mini-Stereo Jack x 1	
Control Terminal	RS232	D-sub9 x 1	
	DC	DC 12V	
	3D	3D Sync	
Network (LAN)	RJ45 x 1		
Built-in Speaker	Mono 3.0 W x 1		
Fan Noise(Eco / Normal)	35 / 40 dB		
Cabinet Size (W x H x D)	334.0 x 120.8 x 267 .6 mm		
Weight	3.8 kg		
Packaged Size (W x H x D)	456 x 400 x 196 mm		
Packaged Weight	5.8 kg		
Power Requirements	100 - 240 V AC, 50 / 60 Hz		
Power	Normal / Eco	370 W / 300 W	
Consumption	Stand-by	0.5 W	
Heat	1263 BTU		
Power Cord	Detachable		
Electrical Safety Compliance	cULus, CB		
Electromagnetic Compatibility	FCC Class B, CE Mark		
User Maintenance	Replace Lamp		
Standard Accessories	Owner's Manual on CD-ROM, Quick Start Guide,		
	AC Power Cord , VGA Cable Dsub15 - Dsub15,		
	Remote Control (with AAA batteries x 2)		

*1 Analog input only



Eiki Industrial Co., Ltd.

6-23 Teramoto, Itami-Shi, Hyogo, Japan

Tel: +81-72-782-7552 • Fax: +81-72-782-7590

EIKI World Web Site: <http://www.eiki.com>

Talk to your EIKI Dealer... the "pro" in projectors.

Specifications subject to change without notice.
2013 EIKI Industrial Co., Ltd. Printed in Japan.

2013/10/X5500/F