

Model Name

MW523/TW523 Digital Projector

Unique selling point

- * SmartEco Power Saving technology
- * Up to 10,000 hours Long lamp life
- * <0.5W standby mode
- * Blu-ray Full HD 3D support

Trade Mark








_	-	_		ш
_		_		

Native Resolution NGCA (1280 x 800) 10900AL 10900AC 10900BOC Colors Anse (1210 x 500) 149 - 179 (1964 23.2m) Native (1610 5 speec ratio selectable) 149 - 179 (1964 23.2m) Nages (Ratio								
	Projection System	DLP						
	Native Resolution	WXGA(1280 x 800)						
1.07 Billion Colors	Brightness	3000AL						
F=2.55-3.06, F=21.25.6mm Native K10 G. spect ratio selectable	Contrast Ratio	13000:1						
Nation Nation 1.49 - 1.79 (.99 (.93.2m) 1.29 1.2	Display Color	I.07 Billion Colors						
Nation Nation 1.49 - 1.79 (.99 (.93.2m) 1.29 1.2	Lens	F=2.55-3.06. f=21-25.6mm						
Thriaw Ratio 1.49 - 1.79 (99.6* @3.2m)								
Second Natio 1.21								
Accord A								
Amp Type								
Association								
Topication Adjustment								
Table 125% 25% 125%								
New Note No.	Keystone Adjustment							
	Projection Offset							
Aretical Scan Rate 23–120Hz HDTV Compatibility HDTV Compatibility Video Compatibility NTSC, PAL SECAM Frame Sequental: Up to 720p (Please refer to User's Manual for detailed support timing) Frame Packing: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p Top Bottom: Up to 1080p X 1 Audio in (Mini DIN 4pin) X 1 Audio in (Mini Jack) X 2 Audio out (Mini jack) X 2 Audio out (Mini jack) X 1 Speaker Up to 1080p X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 1 Speaker Up to 1080p X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) X 2 Audio out (Mini jack) X 2 Audio out (Mini jack) X 1 Audio in (Mini jack) X 1 Audio in (Mini jack) X 2 Audio out (Mini jack) Audio in (Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)						
HDTV Compatibility	Horizontal Frequency	15~102KHz						
Video Compatibility ATSC, PAL, SECAM Frame Requental: Up to 720p Frame Reducing Up to 1080p Frame Reducing Up to 1080p Side by Side: Up to 1080p Side by Side: Up to 1080p Tename Reducing Up to 1080p	Vertical Scan Rate	23~120Hz						
SD Compatibility (Please refer to User's Manual for detailed support timing.) Frame Sequencial: Up to 1080p	Compatibility	HDTV Compatibility						
Please refer to User's Manual for detailed support timing) Side by Side Up to 1080ip Side by Side Up to 1080ip Top Bottom: Up to 1080ip		• •						
for detailed support timing.) Top Bottom: Up to 1080Up Top Bottom: Up								
Top Bottom: Up to 1080p								
Monitor out (D-sub 15pin) x 2 (Share with component) Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 1 Audio in (Mini Jack) x 2 Audio out (Mini Jack) x 1 Speaker 2W x 1 USB (Type B) x 1 R5232 (D8-9pin) x 1 IR Receiver x1 (Front) Dimensions Dimensions(W x H x D) 302.8 x 103.8 x 22.1.8 mm (with feet) 302.8 x 103.8 x 22.1.8 mm (with out feet) Weight 2.3 kg (5.06b2s) Power Power Consumption Normal 240W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) Proceded Torontic Modes Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanse/ Korean/ Norwegian/ Polishir Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Tarkith Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Cellling Mount Power Cord (by region) 3D Glasses User Manual CD Cquick Start Guide Warranty Card (by region) User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		for detailed support tirriing.)						
Monitor out (D-sub 15pin) x 1 Composite Video in (RCA) x 1 S-Video in (Mini DIN 4pin) x 1 HDMI x 1 Audio in (Mini jack) x 2 Audio out (Mini jack) x 1 Speaker 2W x 1 USB (Type B) x 1 RS232 (DB-9pin) x 1 IR Receiver x1 (Front) IR Receiver x1 (Front) Dimensions Dimensions Dimensions(W x H x D) 302.8 x 103.8 x 21.8 mm (with feet) 302.8 x 103.8 x 21.8 mm (with reet) Weight 2.3 kg (5.6 bs) Power Power Supply AC100 to 240 V, 50 to 60 Hz Power Consumption Normal 240W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) Din-Screen Display Languages Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ indonesian/ Japansee/ Korean/ Normegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Trai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Quick Start Guide Warranty Card (by region) User Manual CD Quick Start Guide Warranty Card (by region)			A control of the control					
Composite Video in (RCA) x I S-Video in (Mini DIN 4pin) x I HDMI x I Audio (Mini DIN 4pin) x 2 Audio out (Mini Jack) x 2 Audio out (Mini Jack) x 1 Speaker 2W x I USB (Type B) x 1 RS232 (DB-9pin) x 1 IR Receiver x 1 (Front) Dimensions Dimensions(W x H x D) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (without feet) Weight 2.3kg (5.06lbs) Power Apply ACIDO to 240 V, 50 to 60 Hz Power Consumption Normal Z40W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) Pon-Screen Display Languages Pricture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User I/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Celliling Mount Power Corf (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region) User Manual CD Carry bag	Interface	Computer in (D-sub 15pin)	x 2 (Share with component)					
S-Video in (Mini DIN 4pin) x I HDMI x I Audio in (Mini Jack) x 2 Audio out (Mini Jack) x 1 Speaker 2W x I USB (Type B) x I RS232 (DB-9pin) x I RReceiver xI (Front) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 113.8 x 221.8 mm (with feet) 302.8 x 113.8 x 221.8 mm (without feet) 4 weight 2.3 kg (5.06lbs) Power Audible Noise 7 Din-Screen Display Languages 7 Arabic/Bulgarian/ Croatan/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindl/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User I/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cond (by region) User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		Monitor out (D-sub 15pin)	x I					
HDMI x I Audio in (Mini Jack) x 2 Audio out (Mini Jack) x 1 Speaker 2W x I USB (Type B) x I RS2332 (DB-9pin) x I IR Receiver xI (Front) IR Receiver xI (Front) Dimensions Dimensions Dimensions(W x H x D) 30.28 x 111.8 x 221.8 mm (with feet) 30.28 x 103.8 x 221.8 mm (with feet) 30.28 x 103.8 x 221.8 mm (with feet) 30.28 x 103.8 x 221.8 mm (without feet) Normal 240W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) Dimensions/Display Languages Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User I/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		Composite Video in (RCA)	x I					
Audio in (Mini Jack) x 2 Audio out (Mini Jack) x 1 Speaker 2W x 1 USB (Type B) x 1 RS232 (DB-9pin) x 1 IR Receiver x 1 (Front) Dimensions Dimensions(W x H x D) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with out feet) 40.8 x 23.8 x 23.8 mm (without feet) 40.8 x 23.8 x 23.8 x 23.8 mm (without feet) 40.8 x 23.8 x 23.8 mm (without feet) 40.8 x 23.8 x 23.8		S-Video in (Mini DIN 4pin)	x I					
Audio out (Mini Jack) x I Speaker 2W x I USB (Type B) x I RS232 (D8-9pin) x I IR Receiver xI (Front) Dimensions Dimensions(W x H x D) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with out feet) 402.8 x 103.8 x 221.8 mm (without feet) 403.8 x 221.8 mm (with feet) 403.8 x 21.8 mm (with feet) 403.8 x		HDMI	x I					
Speaker 2W x I USB (Type B) x I RS232 (DB-9pin) x I RR Receiver xI (Front) Dimensions Dimensions(W x H x D) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with out feet) 302.8 x 10		Audio in (Mini Jack)	x 2					
USB (Type B) x I RS232 (DB-9pin) x I IR Receiver xI (Front) Dimensions Dimensions(W x H x D) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with out feet) 302.8 x 103.8 x 221.8 mm (without feet) 302.8 x 103.8 x 221.8 mm (with feet) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with feet) 302		Audio out (Mini Jack)	x l					
RS232 (DB-9pin) x I IR Receiver x1 (Front) Dimensions Dimensions(W x H x D) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (without feet) Weight 2.3kg (5.06lbs) Power Power Supply AC100 to 240 V, 50 to 60 Hz Power Consumption Normal 240W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) Dn-Screen Display Languages Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		Speaker	2W x I					
IR Receiver xl (Front) Dimensions Dimensions(W x H x D) 302.8 x 111.8 x 221.8 mm (with feet) 302.8 x 103.8 x 221.8 mm (without feet) Weight 2.3kg (5.06lbs) Power Power Supply AC 100 to 240 V, 50 to 60 Hz Power Consumption Normal 240W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) Dn-Screen Display Languages Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		USB (Type B)	хI					
Dimensions Dimensions(W x H x D) Weight 23kg (5.06lbs) Power Power Supply AC100 to 240 V, 50 to 60 Hz Power Consumption Audible Noise 32/30 dBA (Normal/Economic mode) Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Remote Control w/ Battery Power Cord (by region) User Manual CD Quick Start Guide Warranty Card (by region) Quick Start Guide Warranty Card (by region)		RS232 (DB-9pin)	x l					
Dimensions Weight 2.3kg (5.06lbs) Power Power Supply AC 100 to 240 V, 50 to 60 Hz Power Consumption Audible Noise On-Screen Display Languages Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Remote Control w/ Battery Power Cord (by region) 3D Glasses User Manual CD Quick Start Guide Warranty Card (by region)		IR Receiver	xI (Front)					
Weight 2.3kg (5.06lbs) Power Supply AC 100 to 240 V, 50 to 60 Hz Power Consumption Normal 240W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) Dn-Screen Display Languages Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Power Cord (by region) 3D Glasses User Manual CD Quick Start Guide Warranty Card (by region)	Dimensions	Dimensions(W x H x D)						
Power Supply Power Consumption Normal 240W, Eco 200W, Standby <0.5W Audible Noise 32/30 dBA (Normal/Economic mode) On-Screen Display Languages Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		,	302.8 x 103.8 x 221.8 mm (without feet)					
Power Consumption 32/30 dBA (Normal/Economic mode) Audible Noise 32/30 dBA (Normal/Economic mode) Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User I/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		Weight	2.3kg (5.06lbs)					
Audible Noise 32/30 dBA (Normal/Economic mode) Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2 Accessories Standard Lens Cover Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Quick Start Guide Warranty Card (by region)	Power	Power Supply						
Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User I/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Quick Start Guide Warranty Card (by region)			•					
Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages) Picture Modes Dynamic/Presentation/sRGB/Cinema/(3D)/User I/User 2 Accessories Standard Optional Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Quick Start Guide Warranty Card (by region)	Audible Noise	32/30 dBA (Normal/Economic i	node)					
Accessories Standard Lens Cover Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Quick Start Guide Warranty Card (by region)	On-Screen Display Languages							
Lens Cover Spare Lamp Kit Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)	Picture Modes	Dynamic/Presentation/sRGB/Ci	nema/(3D)/User 1/User 2					
Remote Control w/ Battery Ceilling Mount Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)	Accessories	Standard	Optional					
Power Cord (by region) 3D Glasses User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		Lens Cover	Spare Lamp Kit					
User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		Remote Control w/ Battery	Ceilling Mount					
User Manual CD Carry bag Quick Start Guide Warranty Card (by region)		Power Cord (by region)	3D Glasses					
Quick Start Guide Warranty Card (by region)			Carry bag					
Warranty Card (by region)		Quick Start Guide						
I amplife you less will your depending an antisonmental conditions and users. Actual products features and engifications are subject to change without notice		Warranty Card (by region)						

^{*}Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.


MW523/TW523 Digital Projector

Distance Chart



Screen size			Projection distance (mm)			Vertical offset	
Diag	gonal	W	Н	Min	Average	Max	(mm)
		(mm)	(mm)	distance		distance	
Inch	mm			(max.		(min.	
				zoom)		zoom)	
30	762	646	404	963	1060	1157	50
40	1016	862	538	1284	1413	1542	67
60	1524	1292	808	1926	2119	2313	101
80	2032	1723	1077	2567	2826	3084	I 35
100	2540	2154	1346	3209	3532	3856	I 68
120	3048	2585	1615	385 I	4239	4627	202
150	3810	323 I	2019	4814	5299	5783	252
200	5080	4308	2692	6419	7065	7711	3 3 7
250	6350	5385	3365	8023	883 I	9639	421
300	7620	6462	4039	9628	10597	11567	505

Wall mount/Ceiling mount Chart

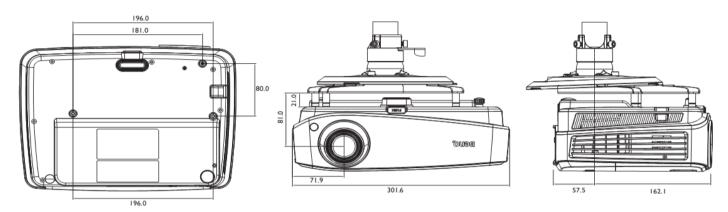

Dimension





