

# HITACHI

Inspire the Next

# CP-RX60



- 1,500 ANSI Lumens
- 4.84 lbs.
- Vertical Keystone Correction
- RGB / Component / Composite / S-video Inputs
- Native XGA Resolution
- Lamp Indicator Light
- Auto Configuration (H-Size, Position)
- Approx. 2,000 Hour Lamp Life
- Reverse Image Function for Ceiling Mount
- Digital Zoom x 1.2
- Freeze Function
- Magnify (4x)
- 33dB Noise Level
- 2-3 Pull Down
- Projection Distance 1.6:1
- Gamma Correction

## SPECIFICATIONS


Model Number	CP-RX60		
Liquid crystal panel structure	0.6" polysilicon active-matrix TFT x 3 with micro lens		
Resolution	Video	540 TV Lines	
	RGB	1024 Dots x 768 Lines	
Colors	16.7 million colors		
Aspect ratio	Native 4:3; or 16:9 Compatible		
Lens	F1.77 (Fixed), Digital Zoom x 1.2, manual focus		
Throw distance	4.40-22.54 ft (60° at 6.56 ft)		
Lamp	165W UHB		
Brightness	1,500 ANSI Lumens		
Contrast Ratio	300:1		
Expected lamp life	Approx. 2,000 hours		
Speakers	1 x 1W		
Power supply	AC100-120V/AC220-240V, 50/60 Hz, Auto Switching		
Power consumption	240W		
Approvals	UL60950/C-UL, FCC Class B, CE, DEMKO EN60950		
Operating temperature	0 - 35°C (32° - 95°F)		
Inputs	RGB	VGA, SVGA, XGA, SXGA, UXGA MAC 16", 480i, 576i, 480p, 720p, 1080i	
	Composite Video Plug & Play	NTSC, NTSC4.43, PAL (-BGD), SECAM, PAL-M, PAL-N DDC1/2B	
Acoustic noise level	38dB (33dB in Whisper Mode)		
Vertical keystone correction	Digital Keystone +/- 15°		
Input/Output terminals	Data input	RGB	15-pin D-sub connector x 1
		Audio	Stereo mini jack x 1
	Video input	S-video	Mini DIN 4-pin input connector x 1
		Composite video	RCA jack x 1
	Audio		Stereo mini jack x1 (data source selected)
Control terminals			9-pin D-sub connector x 1 RS-232C (Serial)
Chassis	Dimensions	11.22" x 2.87" x 7.94" (W x H x D)	
	Weight	4.84 lbs.	
	Supplied accessories	Remote control, batteries (AA), power cord, RGB cable, Filter Cover for Ceiling Mount Use, Safety Instruction Guide, User Manual (CD)	
Replacement parts	Lamp	CPRS55/PJLC7LAMP (Part #DT00701)	
	Remote control	Part #HL02151	
	Filter	NJ20922	



Screen Size 4:3		Throw distance
Diagonal*	Width*	
40	32	53
60	48	80
80	64	107
100	80	134
120	96	161
150	120	202
200	160	269

Throw ratio: 1.6:1 (distance:width)

\* Measured in inches

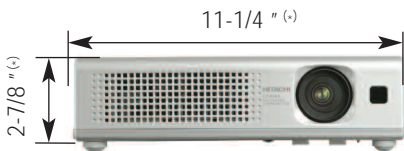

(\*) Excluding Lens and Leg