

dv 465

Present like a pro

Liesegang

projection technology



dv 465 – Present like a pro.

Liesegang's **dv 465** is made for medium-sized conference rooms and even for use at daylight, considering its powerful 2000 ANSI lumens. The ample number of ports and presentation tools makes the **dv 465** a very versatile partner. The XGA resolution is responsible for its very detailed and crystal-clear projections.



- XGA resolution
- Bright 2000 ANSI lumens
- 2 RGB-Inputs,
separate Monitor-Output
- Ideal for mobile use
- Easy lamp change

dv 465




dv 465

Present like a pro

Liesegang

projection technology

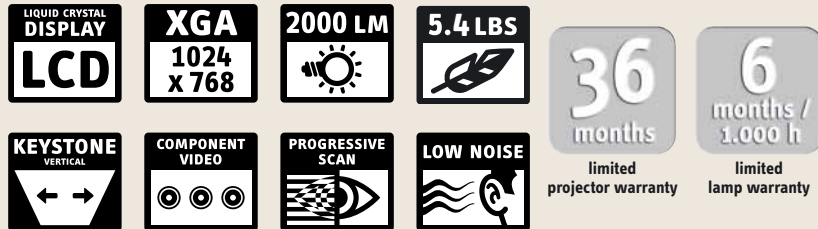

- Extremely compact casing and therefore ideal suited for mobile use
- Integrated, mechanical lens protection
- Keystone Correction
- Individual programming starting image
- 2 RGB-Inputs, separate Monitor-Output
- Input for Component Video
- Easy lamp change
- Integrated De-Interlacer for Progressive Scan



Liesegang dv 465

0219 027C 0000

including power cord, connection cables,
user manual, remote control, software
EAN 4044714219019

Accessories

- 165 W Spare lamp ZU 0218 04 4010
- Ceiling mounting / carrier plate ZU 0218 75 0005
- Ceiling mounting / column CM 25 ZU 0260 75 0006
- Anti-theft key lock ZU 0266 78 0000
- Anti-theft combination lock ZU 0061 78 0000

Technical Specifications*	dv 465
Technology	3 x 0.7" LCD
Native resolution	XGA, 1024 x 768 pixel
Supported resolution	up to UXGA
Video compatibility	PAL, SECAM, NTSC, HDTV
Contrast ratio	500:1
Brightness Standard Mode	2000 ANSI lumens
Brightness Whisper Mode	1600 ANSI lumens
Lamp, Lifetime**	165 W UHB, 2000 h
Mains voltage	100–120 VAC / 220–240 VAC, 50–60 Hz
Power consumption	250 W / < 10 W stand-by
Dimensions (W x H x D)	297 x 64 x 233 mm (11.7" x 2.5" x 9.2")
Weight	2.45 kg (5.4 lbs)
Keystone correction	± 35° vert.
Scanning frequency hor. / vert.	15–91 kHz / 50–120 Hz
Pixel clock	130 MHz
Image uniformity	> 85 %
Speaker	1 x 1 W
Projection lens	F = 1.7–1.9, f = 21.7–26.1 mm
	1.2 x manual zoom
Digital zoom	4 x
Projection distance	0.9–9.2 m (wide angle) 1.1–11 m (tele)
Screen size (diagonal)	0.77–7.70 m (30"–300")
Throw ratio	1.49–1.79
Noise level	36 dB Standard Mode 32 dB Whisper Mode
Connectors	
Computer in	2 x RGB analog (D-Sub HD)
Mouse	1 x USB
Control	1 x RS-232
Video in	1 x RGB analog (D-Sub HD) 1 x Video (RCA) 1 x S-Video (Mini-DIN) 1 x Component (RCA)
Audio in	2 x Audio Stereo (RCA)
Audio out	1 x Audio (Mini jack)
Approvals	CE, FCC B, UL, TÜV
Miscellaneous specifications	• Automatic signal detection • Multilingual on-screen menu • Suitable for 4:3 and 16:9 aspect ratio • Kensington Lock™ slot

* Subject to modification, ** average life time

Distance in m (inch)	Image size in m (inch)		Image diagonal in m (inch)	
	from	to	from	to
1.5 (59.1")	0.84 (32.99")	1.01 (39.63")	1.05 (41.24")	1.26 (49.54")
2.0 (78.7")	1.12 (43.99")	1.34 (52.85")	1.40 (54.99")	1.68 (66.06")
2.5 (98.4")	1.40 (54.99")	1.68 (66.06")	1.75 (68.73")	2.10 (82.57")
3.0 (118.1")	1.68 (65.98")	2.01 (79.27")	2.09 (82.48")	2.52 (99.09")
5.0 (196.9")	2.79 (109.97")	3.36 (132.11")	3.49 (137.47")	4.19 (165.14")
7.0 (275.6")	3.91 (153.96")	4.70 (184.96")	4.89 (192.45")	5.87 (231.20")

Your Liesegang specialist dealer

Liesegang Optoelectronics GmbH
Kaistrasse 5
40221 Duesseldorf
Germany
phone +49 (0) 2 11/39 01-1
fax +49 (0) 2 11/39 01-227
www.liesegang.com
info@liesegang.com

Liesegang Corp.
1001 W. Cypress Creek Rd. 103
Ft. Lauderdale, FL 33309
USA
phone (954) 489 23 01
fax (954) 489 23 18
www.liesegangcorp.com
info@liesegangcorp.com