

## W316ST

## Short throw projection

- Bright projection – 3600 ANSI lumens
- WXGA resolution, 20,000:1 contrast ratio, HDMI input
- Low ownership costs - up to 8,000 hours<sup>2</sup> lamp life
- Crestron RoomView® – RJ45 control and monitoring



## W316ST

Project an impressive 100" image from just over a meter away. Designed for meeting rooms and classrooms, the W316ST boasts a long lamp life and energy-saving features which provide a low overall cost of ownership.

This projector has a built-in speaker, networking capability, Full 3D technology and optional wireless capabilities allowing you to present wirelessly from a PC or mobile device with ease. The W316ST is perfect for all your display needs.

### Short Throw

With a short throw lens, you can project an impressive 100" image from just over a metre away. This allows you to place the projector closer to the wall, reducing shadows so you can present with ease.

### High Contrast

Add more depth to your image with a high contrast projector; with brighter whites and ultra-rich blacks, images come alive and text appears crisp and clear - ideal for business and education applications.



2000:1 Contrast Ratio



20,000:1 Contrast Ratio

### Full 3D

Optoma projectors can display true 3D content from almost any 3D source, including 3D Blu-ray players, 3D broadcasting and the latest generation games consoles. Support for 144Hz rapid refresh rate provides ultra-smooth flicker free images.



### Integrated Speaker

The built-in speaker offers excellent audio support. Easy to set up without the need for costly external speakers

### Eco+



**Eco+ technology brings together high contrast, improved lamp life and energy saving features that are easy to use while reducing power consumption.**

### Energy Saving

Using the specially designed lamp modes, you can reduce the power consumption by up to 70%. Each mode also has a positive effect on

the lamp life, while lowering the total cost of ownership and reducing maintenance.

### Auto Power Off

There may be instances when the projector is left running when not in use. To help save energy, the "Auto Power Off" feature automatically turns off the projector after a set period of time if it is not being used

### Eco AV Mute

Stay in control of your presentation with Eco AV mute. Direct your audience's attention away from the screen by blanking the image when no longer needed. This also reduces the power consumption by up to 70%, further prolonging the life of your lamp.



**Eco AV mute off**  
**100% power consumption**

**Eco AV mute on**  
**25% power consumption**

### Long Lamp Life

Reduce the number of lamp changes with lamp life of up to 8,000 hours<sup>2</sup> using the Education Cycle.

### Remote Mouse

Keep your audience's attention focussed on the right things using the simple, yet powerful remote with USB mouse control.

### Control

Featuring a wide range of options you can control and monitor the projector remotely.

- RS232 - Optoma projector's come with an extensive set of RS232 commands making it simple and easy to manage using any control system.
- AMX Compatibility - Dynamic discovery protocol is incorporated into the projector allowing for easy installation with AMX control systems.
- LAN Control
  - Using the compatible RoomView® software you can power on/off, monitor, manage and control up to 250 projectors at the same time from any computer.
  - Schedule the projectors to power on/off.
  - Control and alter the projector settings using the simple web browser.

- o Emergency text broadcast capabilities for urgent or important announcements.

## Colour Guarantee

Enjoy dazzling colours for years to come; guaranteed by Optoma for five years' consistent performance.




## Amazing Colours

For vibrant, natural looking images, Optoma projectors incorporate BrilliantColor™ multi-colour processing technology.



## Quick Resume

This feature allows the projector to be instantly powered on again, if it is accidentally switched off.

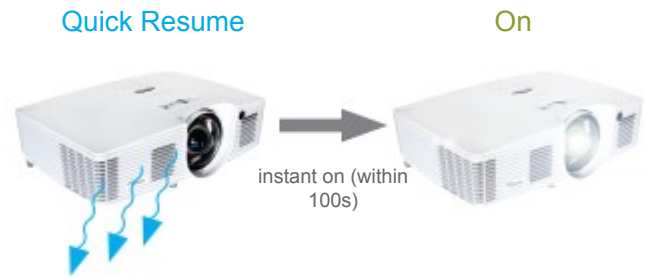

## Wireless Presenting (optional extra)

Making presentations couldn't be easier using the optional wireless features of the WPS Wireless Adapter (sold separately) - you can connect and display presentations wirelessly from a laptop, PC or mobile device.

## W316ST Specification

|  |  |
|--|--|
| Display Technology                             | Single 0.65" WXGA DC3 DMD chip DLP® Technology by Texas Instruments  |
| Native Resolution                              | WXGA 1280 x 800  |
| Brightness <sup>1</sup> (Bright Mode)          | 3600 ANSI Lumens   |
| Contrast                                       | 20,000:1   |
| Noise Level (Eco mode)                         | 29dB   |
| Weight (kg)                                    | 2.76   |
| I/O Connectors                                 | HDMI (1.4a 3D support), 2 x VGA (YPbPr/RGB), S-Video, Composite, 2 x Audio In 3.5mm, Mic in (shared with Audio in 2), Audio Out 3.5mm, VGA Out, RS232, USB mouse/service, RJ45   |
| Computer Compatibility                         | UXGA, SXGA, XGA, SVGA, VGA, Mac  |
| Video Compatibility                            | PAL (B, D, G, H, I, M, N, 4.43MHz), NTSC (M, J, 3.58MHz, 4.443MHz), SECAM (B, D, G, K, K1, L, 4.25.MHz, 4.4MHz, 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz) 1080p(24/50/60Hz)  |
| Displayable Colours                            | 1073.4 Million   |
| Projection Lens                                | F/2.8; f=7.41mm, Fixed Zoom  |
| Throw Ratio                                    | 0.524:1  |
| Projection Screen Size                         | 1.09m ~ 5.62m (44.3" to 221.5" ) Diagonal 16:10  |
| Projection Distance                            | 0.5 ~ 2.5 meters   |
| Zoom Type                                      | Fixed  |
| Aspect Ratio                                   | 16:10 Native, 16:9/4:3 Compatible  |
| Offset   | 112.4%   |
| Horizontal Scan Rate                           | 15.3 - 91.1kHz   |
| Vertical Scan Rate                             | 24 - 85Hz  |
| Lamp Type                                      | 210W   |
| Lamp Life <sup>2</sup> Eco+/Dynamic/Eco/Bright | 7000/6500/6000/4000 (hrs)  |
| Keystone Correction                            | ± 40° Vertical   |
| Dimensions (W x D x H) (mm)                    | 315 x 224 x 102  |
| Power Supply                                   | 100-240V, 50-60Hz  |
| Power Consumption                              | 249W Bright mode / 194W Eco mode (< 0.5W Standby)  |
| Operating Conditions                           | 5°C - 40°C, Max. Humidity 85%, Max. Altitude 3000m   |
| Uniformity                                     | 80%  |
| Security                                       | Security bar, Kensington lock, password protection   |
| Standard Accessories                           | AC power cord, VGA cable, remote control, battery, quick start card, CD user manual  |
| Optional Accessories                           | DLP® Link™ 3D glasses, wireless, ceiling mount   |
| RoHS   | Compliant  |
| 3D Support                                     | Full 3D - The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems. 3D TV broadcast systems, (SKY in the UK), Blu-ray 3D™ and 3D games from the Sony® PS3 or Microsoft® Xbox 360 are now supported as part of the HDMI v1.4a specification. |
| 3D Compatibility                               | Side-by-Side:1080i50 / 60, 720p50 / 60<br>Frame-pack: 1080p24, 720p50 / 60<br>Over-Under: 1080p24, 720p50 / 60   |
| Speaker  | 10   |
| On Screen Display                              | 19 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian/Danish, Hungarian, Czech, Turkish, Romanian, Farsi and Arabic.   |
| Optional Wireless                              | Yes  |



**Optoma Europe Ltd.**

42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ

**[www.optoma.co.uk](http://www.optoma.co.uk)**

<sup>1</sup>Brightness and lamp lifetime will vary depending on the selected projector mode, environmental conditions and usage. As is common with all lamp based projectors, brightness will decrease over the lamp lifetime. <sup>2</sup>Typical lamp life achieved through testing and will vary according to operational use and environmental conditions. 8,000 hours lamp life is based on a daily cycle that reflects projector usage in a typical education environment. Details of this cycle are available on request. <sup>3</sup>Optoma guarantees that in normal use, Optoma DLP® colour quality will be indistinguishable from when new. Exclusions: (a) Guarantee is voided if the projector is subject to damage through misuse. (b) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is excessive (c) Guarantee will not apply if lamp brightness is below 50% due to wear or if the projector is not working due to other faults. (d) Over time worn lamps within all projector types will show a slight colour variance. Copyright © 2013, Optoma Europe Ltd. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. DLP®, BrilliantColor™ and the DLP logo are registered trademarks of Texas Instruments. All images of products are for representation purposes only. Whilst every care is taken to provide accurate images of our products, actual products may differ slightly. Some product images may have been digitally altered by us to add an Optoma logo to the front panel. Optoma reserves the right to amend or alter actual product, product specifications or product images without notice. Some images may be simulated.

24/06/2015 06:37