

Piccadilly pro

The microportable business projector

Liesegang

projection technology



Piccadilly pro – successful presentations anywhere at any time

The **Piccadilly pro** makes it possible: weighing only 1.65 kg it is one of the most lightweight projectors. Thanks to the latest DLP™ technology, this microportable projector still delivers a high-brightness of 1,500 ANSI lumens while at the same time keeping weight at a minimum. Its XGA resolution and its contrast ratio of 1000:1 guarantees a detailed, brilliant reproduction of pictures, presentations and movies. Maximum performance for your business at an attractive price.



Piccadilly pro




Piccadilly pro

The microportable business projector

Liesegang

projection technology

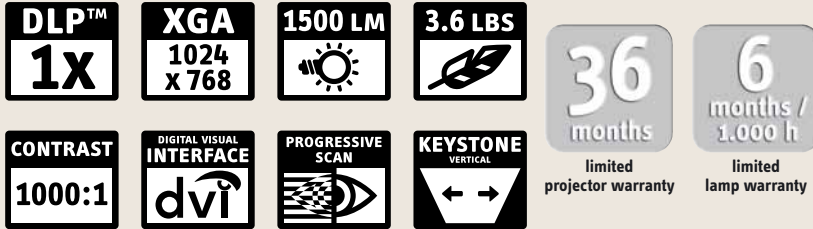

- Vertical keystone correction
- Integrated presentation tools: digital zoom, picture-in-picture, freeze frame
- Microportable
- Optimum video representation via integrated de-interlacer (Progressive Scan)
- Digital and analogue data input (DVI-I)
- High contrast ratio
- HDTV compatible
- Electronic image reversal for back projection and projection from the ceiling



Liesegang Piccadilly pro

including power cord, connecting cables,
remote control, user manual, softcase
EAN 4043822204016

0204 026D 0000

Accessories

150 W Spare lamp	ZU 0204 04 4010
Ceiling mounting	ZU 0204 75 0009
Anti-theft key lock	ZU 0266 78 0000
Anti-theft combination lock	ZU 0061 78 0000

Technical Specifications*	Piccadilly pro
Technology	0.7" DLP™
Native resolution	XGA, 1,024 x 768 pixel
Supported resolution	up to SXGA
Video compatibility	PAL, SECAM, NTSC, HDTV
Contrast ratio	1,000:1
Brightness standard mode	1,500 ANSI-lumens
Lamp, Lifetime**	150 W VIP, 2,000 h
Mains voltage	100–240 VAC / 47–63 Hz
Power consumption	210 W / 10 W stand-by
Dimensions (W x H x D)	240 x 64 x 188 mm (9.4" x 2.5" x 7.4")
Weight	1,65 kg (3.6 lbs)
Keystone correction	± 15° vert.
Scanning frequency hor. / vert.	15–90 kHz / 43–85 Hz
Pixel clock	110 MHz
Image uniformity	> 80 %
Speaker	1 x 0.5 W
Projection Lens	F = 2.4, f = 22–26 mm
	1.2 x manual zoom
Digital zoom	16 x
Projection distance	1.5–10 m
Screen size (diagonal)	1.0–7.80 m (30"–300")
Throw ratio	1.5–1.8
Noise level	34 dB
Connectors	
Computer in	1 x RGB (DVI-I)
Mouse	1 x USB
Video in	1 x Video (Cinch)
	1 x S-Video (Mini jack)
	1 x Component (DVI-I)
Audio in	1 x Audio Stereo (Mini jack)
Approvals	CE, FCC, UL, TÜV
Miscellaneous specifications	
	• Automatic signal detection
	• Multilingual on-screen menu
	• Suitable for 4:3 and 16:9 aspect ratio
	• Kensington Lock™ slot

* Subject to modification, ** Average lifetime

Distance in m (inch)	Image Size in m (inch)		Image diagonal in m (inch)	
	from	to	from	to
1.5 (59.1")	0.83 (32.81")	1.00 (39.37")	1.04 (41.01")	1.25 (49.21")
2.0 (78.7")	1.11 (43.74")	1.33 (52.49")	1.39 (54.68")	1.67 (65.62")
2.5 (98.4")	1.39 (54.68")	1.67 (65.62")	1.74 (68.35")	2.08 (82.02")
3.0 (118.1")	1.67 (65.62")	2.00 (78.74")	2.08 (82.02")	2.50 (98.43")
5.0 (196.9")	2.78 (109.36")	3.33 (131.23")	3.47 (136.70")	4.17 (164.04")
7.0 (275.6")	3.89 (153.11")	4.67 (183.73")	4.86 (191.38")	5.83 (229.66")

Your Liesegang specialist dealer

Liesegang Optoelectronics GmbH

Kaistrasse 5
40221 Duesseldorf
Germany
phone +49 (0) 211/39 01-1
fax +49 (0) 211/39 01-227
www.liesegang.com
info@liesegang.com

Liesegang Corp.

1001 W. Cypress Creek Rd. 103
Ft. Lauderdale, FL 33309
USA
phone (954) 489 23 01
fax (954) 489 23 18
www.liesegangcorp.com
info@liesegangcorp.com