

TOSHIBA

t30

1,600 ANSI-lumens
Contrast 2,000:1
DLP™-technology



Get into the world of
professional presentation



- ECO mode reduces the operating noise and expands the lamp life
- Perfect solution for IT business
- Three picture modes: brightness/standard/true colour

t30

the world of business projectors

Display 0.55" DLP Chip™*

Resolution XGA 1,024 x 768

Brightness 1,600 ANSI-lumens

Colour reproduction 16.7 mio. colours

Contrast 2,000:1

Projection format 4:3 switchable to 16:9

Lamp 180 W/144 W in ECO mode (TLPLV5LAMP)

Max. lamp life up to max. 3,000 hours/
up to max. 4,000 hours in ECO mode

Lens F = 2.0 - 2.2 / f = 19.4 - 23.3 mm,
manual zoom

Zoom ratio 1.2 x

Frequency (hor./vertical) 15 - 93 kHz/50 - 85 Hz

Projection front-, rear- and ceiling

Digital keystone correction vertical +/- 15°

Picture size (diagonal) 0.76 m - 7.62 m

Projection distance 1.16 m - 10.00 m

Input signal NTSC/PAL/SECAM 480i, 480p, 576i, 576p,
1,080i, 720p, VGA/SVGA, XGA/SXGA/UXGA (comp.)

Inputs 2 x RGB (D-sub 15), video (RCA, S-video),
component video (D-sub 15), audio (stereo mini jack)

Outputs RGB (D-sub 15), audio (stereo mini jack)

Serial interface RS-232C (mini DIN 8pin)

Power supply AC 100-240V, 50/60 Hz

Loudspeaker integrated

Dimensions (W x H x D) 285 x 98 x 254 mm

Weight 3.0 kg

Specials ECO mode, 3 picture mode


Accessories remote control with batteries, owners manual
(CD ROM), RGB- and power cable, softcase, lens cap

Options ceiling mounting, trolley, spare lamp




Projection distance (in meters)

7.62 - 10.00
6.65 - 8.00
3.30 - 3.97
1.96 - 2.36
1.16

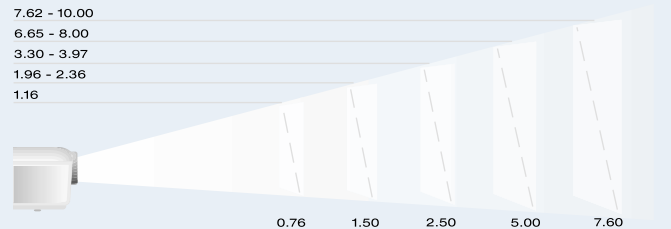

Picture size (diagonal in meters)

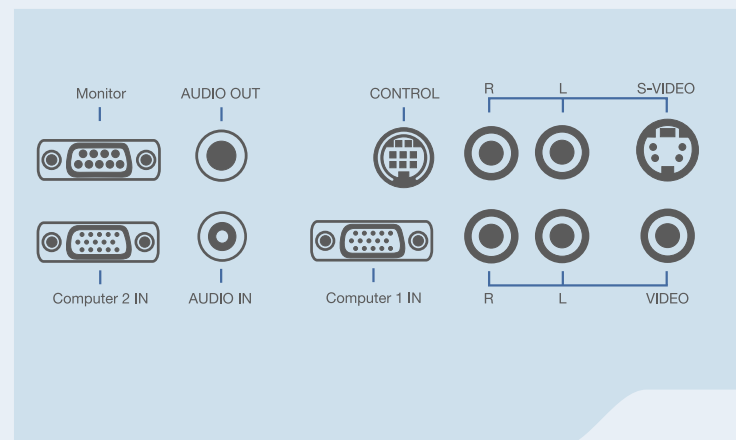

* The DLP™ logo and DLP™ medallion are trademarks of Texas Instruments