

ddv 2000

High contrast projection

Liesegang

projection technology



ddv 2000 – Compact, high-brightness & rich in contrast

The Liesegang **ddv 2000** belongs to the class of professional office projectors and projects clear and bright images with a brightness of 2000 ANSI lumens even under daylight conditions. With its low weight the **ddv 2000** is ideal suited for mobile use and room-to-room presentations. Besides to its extensive interface equipment the **ddv 2000** is also convincing with an outstanding video quality, contrast colour representation and a contrast ratio. Liesegang **ddv 2000** – Performance at a convincing price.



- high-quality lens
- XGA resolution
- 2000 ANSI lumens image brightness
- extensive equipment of presentation tools and interfaces

ddv 2000




ddv 2000

High contrast projection

Liesegang

projection technology

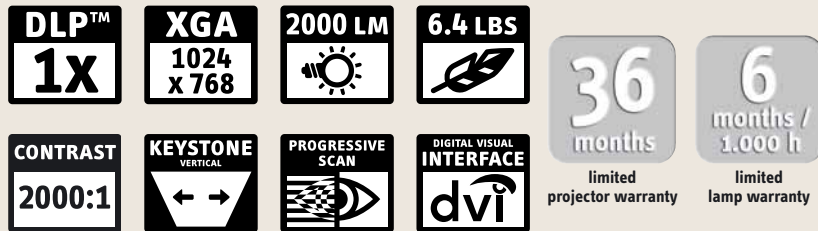

- Convincing video quality, natural colours, a high black level and rich in contrast representations thanks to DLP™ technology
- Easy lamp change – the lamp opening is on the projectors top-side that allows a simple change even for ceiling mounted projectors.
- Colour Management for individual colour adjustment
- High-quality lens guarantees sharp presentations
- Presentation tools: Freeze frame and Blank
- 2 Computer-Ins (1x analog, 1x digital), separate Monitor-Out
- Input for Component Video
- Optimum video representation via integrated De-Interlacer (Progressive Scan)
- IR remote control with mouse function and laser pointer
- Electronic image reversal for back projection from the ceiling



Liesegang ddv 2000

including power cord, connecting cables, IR remote control, with mouse connection and laser pointer, user manual, lens cap, softcase
EAN 4044714201304

1201 029D 0000



Accessories

- Spare lamp
- Ceiling mounting/supporting plates
- Ceiling mounting/column CM 25
- Anti-theft key lock
- Anti-theft combination lock

- ZU 1201 04 4010
- ZU 1201 75 0005
- ZU 0260 75 0007
- ZU 0266 78 0000
- ZU 0061 78 0000

Technical Data*	ddv 2000
Technology	0.7" DLP™, 4 segment colour wheel
Native resolution	XGA, 1,024 x 768 pixel
Supported resolution	SXGA, 1,280 x 1,024 pixel
Video compatibility	PAL, SECAM, NTSC, HDTV
Contrast ratio	2,000:1
Brightness Standard Mode	2000 ANSI lumens
Brightness Whisper Mode	1600 ANSI lumens
Lamp, Lifetime**	200 W VIP, 2000 h**, up to 3000 h in Whisper Mode
Mains voltage	100–240 VAC / 50–60 Hz
Power consumption	300 W / <20 W stand-by
Dimensions (W x H x D)	325 x 100 x 235 mm (12.8" x 3.9" x 9.3")
Weight	2.9 kg (6.4 lbs)
Keystone correction	± 15° vert.
Scanning frequency hor./vert.	15,31–90 kHz / 50–85 Hz
Pixel clock	110 MHz
Image uniformity	> 80 %
Speaker	1 x 2 W
Projection lens	F = 2.6, f = 24–30 mm, 1.2 x manual zoom
Digital zoom	16x
Projection distance	1.50–8.0 m
Screen size (diagonal)	0.90–7.20 m (30"–300")
Throw ratio	1.69–1.97
Noise level	34 dB Standard Mode 32 dB Whisper Mode
Connectors	
Computer in	1 x RGB analog (D-Sub HD) 1 x DVI-I
Control	1 x RS-232
Mouse	1 x USB
Monitor out	1 x RGB analog (D-Sub HD)
Video in	1 x Video (RCA) 1 x S-Video (Mini-DIN) 1 x Component (RCA)
Audio in	1 x Audio Stereo (RCA) 1 x Audio Stereo (Mini jack)
Audio out	1 x Audio Stereo out (Mini jack)
Approvals	CE, FCC B, UL, TÜV 60950
Miscellaneous specifications	
	• Automatic signal detection
	• Multilingual on-screen menu
	• Suitable for 4:3 and 16:9 aspect ratio
	• Kensington Lock™ slot

* Subject to modification, ** Average lifetime

Distance in m (inch)	Image Size in m (inch)		Image diagonal in m (inch)	
	from	to	from	to
1.5 (59.1")	0.76 (29.98")	0.89 (34.94")	0.95 (34.94")	1.11 (43.68")
2.0 (78.7")	1.02 (39.97")	1.18 (46.59")	1.27 (46.59")	1.48 (58.24")
2.5 (98.4")	1.27 (49.96")	1.48 (58.24")	1.59 (58.24")	1.85 (72.80")
3.0 (118.1")	1.52 (59.95")	1.78 (69.89")	1.90 (69.89")	2.22 (87.36")
5.0 (196.9")	2.54 (99.92")	2.96 (116.48")	3.17 (116.48")	3.70 (145.60")
7.0 (275.6")	3.55 (139.89")	4.14 (163.07")	4.44 (163.07")	5.18 (203.84")

Your Liesegang specialist dealer

Liesegang Optoelectronics GmbH
Kaistrasse 5
40221 Duesseldorf
Germany
phone +49 (0) 211/39 01-1
fax +49 (0) 211/39 01-227
www.liesegang.com
info@liesegang.com

Liesegang Corp.
1001 W. Cypress Creek Rd. 103
Ft. Lauderdale, FL 33309
USA
phone (954) 489 23 01
fax (954) 489 23 18
www.liesegangcorp.com
info@liesegangcorp.com



DIN EN ISO 9001:2000
Zertifikat: 01 100 042035