

ddv 2500

Convincing high-brightness pictures

Liesegang

projection technology



ddv 2500 – Office projector for highest demands

Convincing in brightness, contrast and functionality: With the Liesegang **ddv 2500** you get the ideal projector for your successful presentation. With XGA resolution, DLP™ technology, 3000 ANSI lumens image brightness and a contrast ratio of 2000:1 you will be the focus. The **ddv 2500** is suitable for medium-sized to large conference- and meeting rooms and even under daylight conditions you can be sure of clear and bright images. Besides extensive equipment of presentation tools and interfaces, the **ddv 2500** is having an Ethernet-interface which enables a controlling of all functions through the internet browser. Latest technology will convince you.



- Ethernet interface for the control of all projector functions
- XGA resolution
- 3000 ANSI lumens image brightness
- extensive equipment of presentation tools and interfaces

ddv 2500




ddv 2500

Convincing high-brightness pictures

Liesegang

projection technology

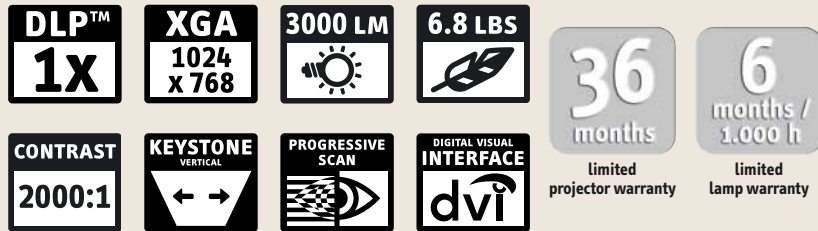

- Network-connector on-board
- Whisper mode for low-noise operation
- Contrast 2000:1
- Input for Component-Video
- Integrated presentation tools: Digital Zoom, Picture-in-Picture, Freeze frame
- Optimized video playback by integrated De-Interlacer (Progressive Scan)
- IR remote control with mouse function and laser pointer
- Electronic image reversal for back projection and ceiling mount projection



Liesegang ddv 2500

including power cord, connecting cable,
remote control, user manual, soft case, lens-cap
EAN 4044714200307

1200 031D 0000



Accessories

- | | |
|----------------------------------|-----------------|
| 250 W Spare lamp | ZU 1200 04 4010 |
| Ceiling mounting / carrier plate | ZU 1200 75 0005 |
| Ceiling mounting / column CM 25 | ZU 0260 75 0006 |
| Anti-theft key lock | ZU 0266 78 0000 |
| Anti-theft combination lock | ZU 0061 78 0000 |

| Technical Specifications* | ddv 2500 |
|-------------------------------------|--|
| Technology | 1x 0.7" DLP™ |
| Native resolution | XGA, 1024 x 768 pixel |
| Supported resolution | up to SXGA |
| Video compatibility | PAL, SECAM, NTSC, HDTV |
| Contrast ratio | 2000:1 |
| Brightness Standard Mode | 3000 ANSI lumens |
| Brightness Whisper Mode | 2400 ANSI lumens |
| Lamp, Lifetime** | 250 W VIP, 2000 h |
| Mains voltage | 100–240 VAC / 50–60 Hz |
| Power consumption | 340 W / < 10 W stand-by |
| Dimensions (W x H x D) | 285 x 86 x 220 mm (11.2" x 3.4" x 8.7") |
| Weight | 3.1 kg (6.8 lbs) |
| Keystone correction | ± 15° vert. |
| Scanning frequency hor. / vert. | 15.30–90 kHz / 50–85 Hz |
| Pixel clock | 110 MHz |
| Image uniformity | > 80 % |
| Speaker | 1 x 3 W |
| Projection lens | F = 2.4, f = 25.0–30.0 mm |
| | 1.2 x manual zoom |
| Digital zoom | 16 x |
| Projection distance | 1.5–10.0 m |
| Screen size (diagonal) | 0.90–7.20 m (30"–300") |
| Throw ratio | 1.73–2.1 |
| Noise level | 34 dB Standard Mode |
| | 30 dB Whisper Mode |
| Connectors | |
| Computer in | 1 x DVI-I |
| Monitor out | 1 x USB |
| Control | 1 x RS-232 (PS/2) |
| | 1 x Ethernet (RJ45) |
| Monitor out | 1 x RGB analog (D-Sub HD) |
| Video in | 1 x Video (RCA) |
| | 1 x S-Video (Mini-DIN) |
| | 1 x Component (DVI-I) |
| Audio in | 1 x Audio Stereo (Mini jack) |
| Audio out | 1 x Audio Stereo (Mini jack) |
| Approvals | CE, FCC B, UL 60950, TÜV EN 60950 |
| Miscellaneous specifications | <ul style="list-style-type: none"> • Automatic signal detection • Multilingual on-screen menu • Suitable for 4:3 and 16:9 aspect ratio • Kensington Lock™ slot |

* Subject to modification, ** average life time

| Distance in m (inch) | Image size in m (inch) | | Image diagonal in m (inch) | |
|----------------------|------------------------|----------------|----------------------------|----------------|
| | from | to | from | to |
| 1.5 (59.1") | 0.71 (28.12") | 0.87 (34.14") | 0.89 (35.15") | 1.08 (42.67") |
| 2.0 (78.7") | 0.95 (37.50") | 1.16 (45.51") | 1.19 (46.87") | 1.45 (56.89") |
| 2.5 (98.4") | 1.19 (46.87") | 1.45 (56.89") | 1.49 (58.59") | 1.81 (71.12") |
| 3.0 (118.1") | 1.43 (56.24") | 1.73 (68.27") | 1.79 (70.30") | 2.17 (85.34") |
| 5.0 (196.9") | 2.38 (93.74") | 2.89 (113.79") | 2.98 (117.17") | 3.61 (142.23") |
| 7.0 (275.6") | 3.33 (131.23") | 4.05 (159.30") | 4.17 (164.04") | 5.06 (199.13") |

Your Liesegang specialist dealer

Liesegang Optoelectronics GmbH

Kaistrasse 5
40221 Duesseldorf
Germany
phone +49 (0) 211/39 01-1
fax +49 (0) 211/39 01-227
www.liesegang.com
info@liesegang.com

Liesegang Corp.

1001 W. Cypress Creek Rd. 103
Ft. Lauderdale, FL 33309
USA
phone (954) 489 23 01
fax (954) 489 23 18
www.liesegangcorp.com
info@liesegangcorp.com



DIN EN ISO 9001:2000
Zertifikat: 01 100 042035