

Multimedia Projector

LV-WX320



Bright and clear WXGA portable projector with digital input and easy operation.

Enjoy bright, high quality widescreen images and exceptionally easy set-up with the Canon LV-WX320. HDMI input, quiet operation and compact size add to the projector's flexibility.

Key features

- Enjoy sharp, widescreen images with native WXGA resolution (1280 x 800 pixels)
- Experience bright, vivid images with 3200 lumens brightness and 10000:1 contrast ratio
- 1.1x zoom lens allows flexible projector placement
- Compact and lightweight: just 2.5kg
- Vertical keystone correction
- 5000h lamp life (6000h in Eco Mode)
- HDMI™ port and 2x VGA ports
- RJ-45 network port for remote control and monitoring
- Built-in 10W speaker

What's in the box

Multimedia Projector LV-WX320, Remote Controller, Battery, AC Mains Power Cable, Computer Connection Cable, Instruction Manual on CD-ROM, Important Information and Quick Start Document, Warranty Document

Dimensions (W x H x D)

282 mm x 115 mm x 232 mm

Weight

2.5 kg

LV-WX320


Specifications



| | |
|---|--|
| MULTIMEDIA PROJECTOR Product Class | Ultra-Portable |
| LCD PANEL Type Size and Number Aspect Ratio Native Resolution | Reflective DLP™ chip 0.65" diagonal, Single chip 16:10 1280 x 800 (WXGA), 1024000 pixels |
| OPTICS Lamp Type Lens F Number and Focal Length Zoom Magnification and Control Focus Control Lens Shift | 190W P-VIP F2.56 - F2.8; f = 21.0 - 23.1mm 1.1x Manual Manual 50% (fixed) |
| IMAGE AND AUDIO Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Projection Ratio Digital Zoom Magnification Keystone Correction Range Digital RGB Compatibility Analogue RGB Compatibility Digital Video Scan Systems Component Video Scan Systems Video / S-Video Colour Systems Display Modes Built-in Speaker | 3200 lumens (2100 Lumens Eco mode) 75% 10000:1 (with lamp control) 1.94m - 4.85m (3.23m to 3.55m for 100" image) 60" - 150" (129 x 81 cm - 323 x 202 cm) 1.50:1 - 1.65:1 2x maximum Vertical: Manual +/-30° (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA (UXGA / SXGA+ / WXGA+ / FWXGA) / WXGA / SXGA / XGA / SVGA / VGA / MAC 1080p / 1080i / 720p / 576p / 480p 1080p / 1080i / 720p / 576p / 576i / 480p / 480i PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM Presentation, Standard, sRGB, Movie, User 1 & 2 10W RMS, Monaural |

| | |
|---|--|
| PORT AND CONNECTORS Digital RGB / Digital Video Input Analogue RGB Input 1 Analogue RGB Input 2 S-Video Input Composite Video Input Audio Input Audio Output Projector Control Network Port Service Port | HDMI™ V1.3 Mini D-Sub 15-pin (Component Video via optional cable) Mini D-Sub 15-pin (Component Video via optional cable) Mini DIN 4-pin RCA x1 3.5mm stereo mini-jack 3.5mm stereo mini-jack (variable level) Mini D-Sub 9-pin (RS-232C) RJ-45 (100BASE-TX / 10BASE-T) USB Type B |
| MECHANISMS Front Elevation Mechanism Rear Adjustment Mechanism | 1x Mechanical foot, 6° maximum image elevation 1x Mechanical foot |
| RATINGS Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Warranty | 282 mm x 115 mm x 232 mm (including protrusions) 2.5 kg 100V - 240V AC, 50/60Hz Normal Mode: 330W / Eco Mode: 275W / Standby: 3W, Standby (LAN off): 0.5W Normal Mode: 35dBA / Eco Mode: 29dBA 0°C to +40°C 3 years |
| All data is based on Canon standard testing methods except where indicated. Subject to change without notice. ™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries. | |

Connectivity

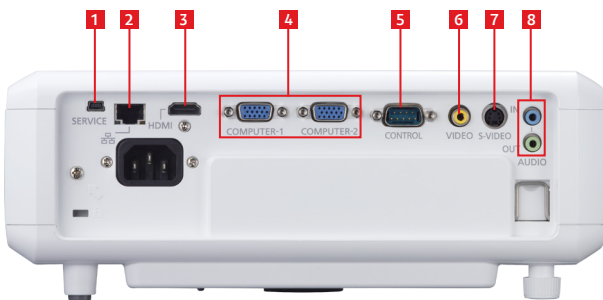

- 1** USB type B: Service port
- 2** RJ-45: Network Connection (100BASE-TX / 10BASE-T)
- 3** HDMI: HDMI Input
- 4** Mini Dsub 15 x 2: Analog PC input / Component video input
- 5** Dsub9: RS232C connection
- 6** RCA: Video input
- 7** Mini DIN4: S-video input
- 8** Mini jack x 2: Audio input x 1, Audio output x 1



BECAUSE CLARITY MATTERS

Multimedia Projector

LV-WX320



Bright and clear WXGA portable projector with digital input and easy operation.

The whole range consists of:

XEED: WUX5000, WUX5000D Medical, WX6000, WX6000D Medical, SX6000, SX6000D Medical, WUX450, WUX450D Medical, WUX400ST, WUX400DST Medical, WX520, WX520D Medical, WX450ST

LV: LV-S300, LV-WX320, LV-WX300ST, LV-X320, LV-X300ST, LV-8235UST, LV-7490.

Box Dimensions (W x H x D)

185 mm x 345 mm x 377 mm

Box Weight

Approx. 3.6 kg


MERCURY CODES

PRODUCT

| Name | Mercury Code | EAN Code |
|-----------------------------------|--------------|---------------|
| Multimedia Projector LV-WX320 (E) | 9877B003AA | 4549292021301 |

OPTIONS

| | | |
|----------------------------|------------|---------------|
| Remote Controller LV-RC08 | 0029C001AA | 4549292024203 |
| Soft Carrying Case LV-SC01 | 5331B001AA | 4960999787930 |
| Projector Lamp LV-LP39 | 0119C001AA | 4549292026641 |

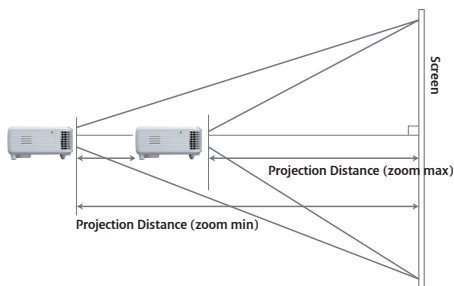

THROW DISTANCES (16:10 aspect ratio)

| | | | | | | | | | | | |
|---------------------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Image size (16:10) | Diagonal [type] | 60 | 70 | 80 | 90 | 100 | 110 | 120 | 130 | 140 | 150 |
| | Width [m] | 1.3 | 1.5 | 1.7 | 1.9 | 2.2 | 2.4 | 2.6 | 2.8 | 3.0 | 3.2 |
| | Height [m] | 0.8 | 0.9 | 1.1 | 1.2 | 1.3 | 1.5 | 1.6 | 1.8 | 1.9 | 2.0 |
| Projection distance | L (W) [m] | 1.9 | 2.3 | 2.6 | 2.9 | 3.2 | 3.5 | 3.9 | 4.2 | 4.5 | 4.8 |
| | L (T) [m] | 2.1 | 2.5 | 2.8 | 3.2 | 3.5 | 3.9 | 4.3 | — | — | — |

www.canon.com/lcd-sim

For more information visit
canon.com.au/projectors
 call **13 13 83** or email
specialised.imaging@canon.com.au

canon.co.nz
 call **0800 222 666**

Canon | BECAUSE CLARITY MATTERS