

TOSHIBA

s25sw25


business

Contrast 2,000 : 1
1,800 ANSI lumens
sw25: Wireless
Mobil



**Simply be
mobile.**

s25sw25

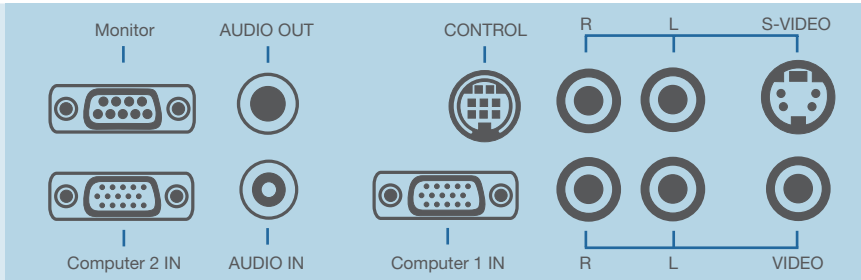

Benefits

- High contrast ratio: 2,000 : 1
- sw25 features an integrated WLAN function plus all necessary software for wireless presentation
- Excellent picture quality in video and data mode
- ECO mode reduces the operating noise and expands the lamp life
- Perfect solution for education and presentation applications
- Three picture modes: brightness / standard / true colour

Display	0.55" DLP Chip™*
Resolution	SVGA 800 x 600
Brightness	1,800 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000 : 1
Projection format	4:3 switchable to 16:9
Lamp	280 W / 144 W in ECO mode (TLPLV5LAMP)
Max. lamp life	up to max. 3,000 hours / up to max. 4,000 hours in ECO mode
Frequencies (hor./vert.)	15 - 77 kHz / 56 - 85 Hz
Lens	F = 2.0 - 2.2 / f = 18.2 - 21.84 mm, manual zoom, focus
Projection	front, rear and ceiling
Zoom ratio	1.2 x
Digital keystone correction	vertical +/- 15°
Picture size (diagonal)	0.76 m - 7.62 m
Projection distance	1.16 m - 10 m
Input signal	NTSC/PAL/SECAM, HDTV&DTVi, DVD, VGA/SVGA, XGA/SXGA/UXGA (comp.)
Inputs	2 x RGB (D-sub 15pin), composite video, S-video, component video via D-sub, audio (stereo mini jack)
Outputs	RGB (D-sub 15), audio (2 x mini jack)
Serial interface	RS-232C (mini DIN 8pin)
Power supply	AC 100-240V, 50/60 Hz
Loudspeaker	integrated
Dimensions (W x H x D)	285 x 97 x 255 mm
Weight	3.0 kg (s25), 3.1 kg (sw25)
Specials	ECO mode, 3 picture modes
Accessories	remote control with batteries, owners manual (CD ROM), RGB- and power-cable, softcase, lens cap, WLAN card and software (only sw25)
Options	trolley, spare lamp
Wireless communication (sw25)	WLAN capable with WLAN card, Wireless LAN (IEEE802.b/g), 64/128 bit encoding

*DLP is a registered trademark of Texas Instruments

February 2005 • Subject to modifications and errors

