


## ZU660e

Spectacular image quality, low maintenance and ultimate reliability

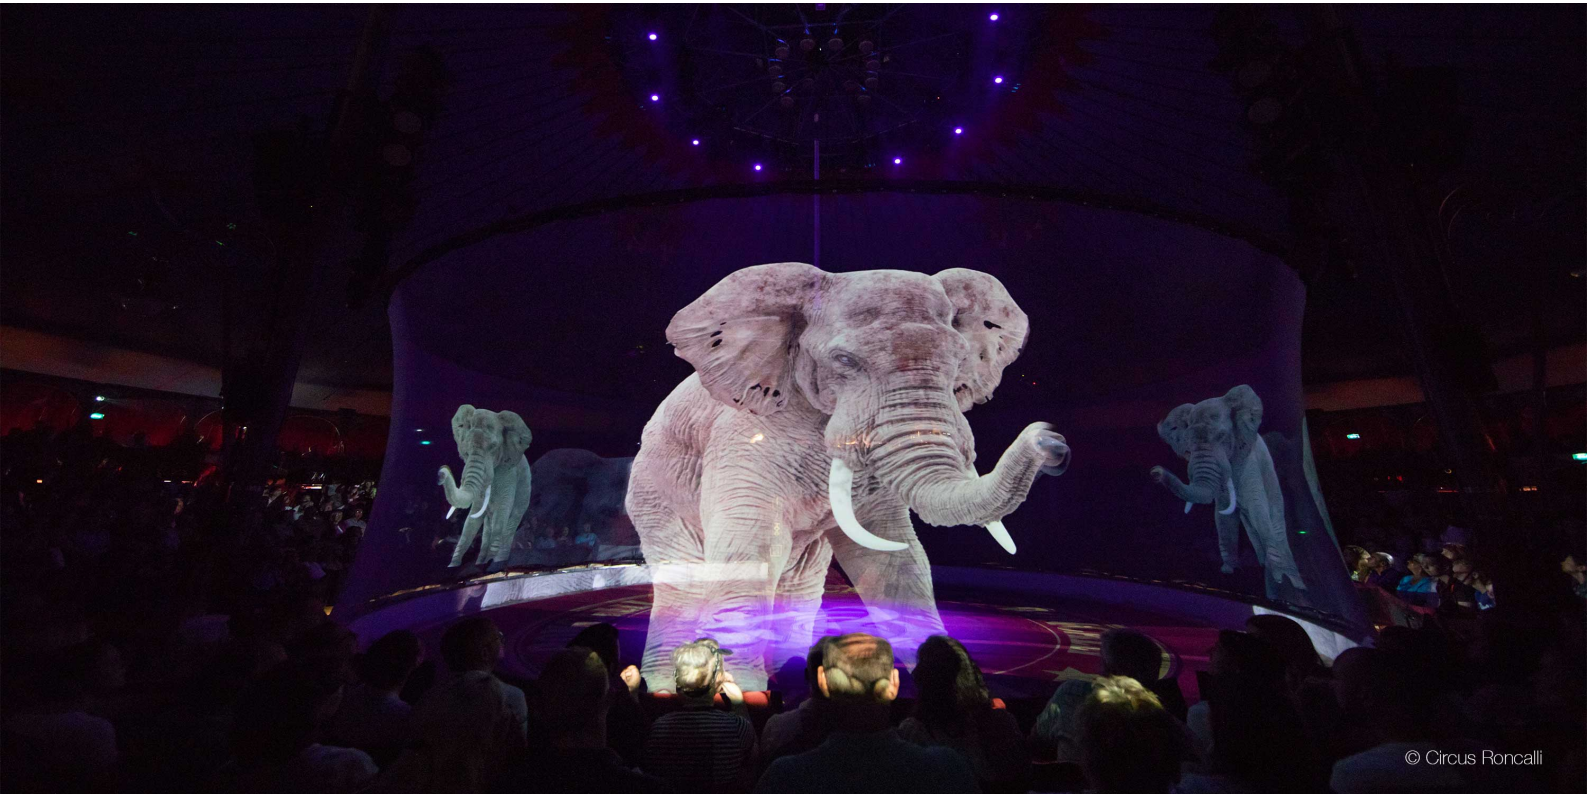

© Circus Roncalli

- **20,000 hours maintenance-free laser light source at full brightness**
- **Dust resistant – Independently tested, IP5X certified for total reliability**
- **6,500 lumens laser WUXGA DLP projector**
- **Installation flexibility – 7x lens options including ultra short throw and dome lens**

The ZU660e builds on the success of the DuraCore professional installation projector range. With enhanced features such as 4-corner correction and higher brightness it joins the DuraCore laser line up which combines industry-leading lifetime of the light source with an independent dust resistant certification for ultimate peace of mind.



## Specifications

<b>Display/image</b>	
Display technology	DLP
Resolution	WUXGA (1920x1200)
Brightness	6,500 lumens
ANSI brightness	6,000 lumens
Contrast ratio	100,000:1
ANSI contrast ratio	250
Contrast ratio - dynamic	6,000:1
Contrast ratio - full on/off	1,200:1
Native aspect ratio	16:10
Aspect ratio - compatible	4:3,16:9,16:10
Keystone correction - horizontal	20 degrees°
Keystone correction - vertical	20 degrees°
Uniformity	90%
Screen size	Dependent on lens
<b>Lamp info</b>	
Light source type	Laser
LASER life	20,000 hours
<b>Optical</b>	
Throw ratio	Dependent on lens
Projection distance (m)	Dependent on lens
Lens options	BX-CTA16- 0.36 ~ 0.36 BX-CTA15- 0.75 ~ 0.95 BX-CTA01- 0.95 ~ 1.22 BX-CTA02- 1.22 ~ 1.53 BX-CTA06- 1.22 ~ 1.53 BX-CTA03- 1.52 ~ 2.92 BX-CTA13- 2.90 ~ 5.50 BX-CTADOME- Dome lens
<b>Connectivity</b>	
Connections	<b>Inputs</b> 2 x HDMI, 1 x VGA (YPbPr/RGB), 1 x 3D sync, 1 x DVI-D, 1 x HDBaseT <b>Outputs</b> 1 x VGA (YPbPr/RGB), 1 x 3D sync <b>Control</b> 1 x RS232, 1 x Wired remote, 1 x RJ45
<b>General</b>	
Noise level (typical)	36dB
PC compatibility	HD, UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
2D compatibility	PAL (625/576i/p), SECAM, NTSC (525/480i/p), HDTV (720p, 1080i/1080p)
3D compatibility	Side-by-Side:1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60
3D	Full 3D
Security	Security bar,Kensington Lock
OSD / display languages	11 languages: Dutch,English,French,German,Indonesian,Italian,Japanese,Portuguese,Russian,Chinese (simplified),Spanish
24/7 operation	Yes
360° operation	Yes
Operating conditions	5 - 40 °C
Remote control	Wired ProAV remote
In the box	AAA Battery, AC power cable 3M, Lens cover, VGA cable 1.8m, User manual CD, Quick start guide
<b>Networking</b>	
LAN	Yes
<b>Power</b>	
Power supply	100 - 240V, 50 - 60Hz
Power consumption (standby)	0.5W
Power consumption (min)	470W
Power consumption (max)	650W
<b>Weight and dimensions</b>	
Net weight	17kg
Dimensions (W x D x H) mm	484 x 509 x 181

