

MW843UST Digital Projector




Features

- High brightness 3,000 ANSI Lumens
- Ultra short throw lens design
- SmartEco Power Saving technology
- Blu-ray 3D Supported
- Up to 7,000 hours lamp life
- Wall mount included

Box Contents

- Remote Control w/ Battery *1
- Power Cord (3M) *1
- User Manual CD *1
- Quick Start Guide *1
- VGA(D-sub 15pin) Cable *1
- Wall mount kit (installation guide) *1

Dimension

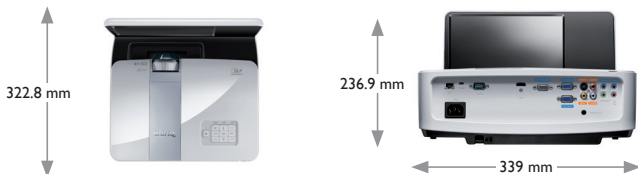


Optional Accessories

- Spare Lamp Kit5J.JCA05.001
- 3D Glasses..... 5J.J9H25.001



Because it matters

Input and Output Terminals

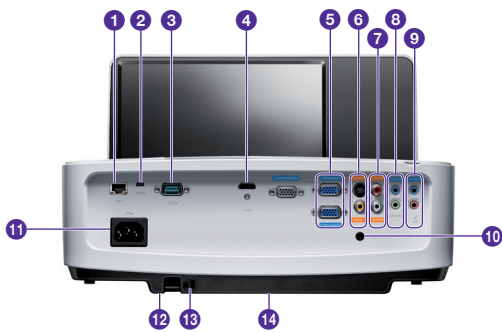

- ① RJ45 LAN input jack
- ② USB mini B type port
- ③ RS232 control port
- ④ HDMI-input port
- ⑤ RGB signal output jack
- ⑥ RGB (PC)/Component Video (YPbPr/YCbCr) signal input jack
- ⑦ S-Video input jack
- ⑧ Audio (L/R) input jacks
- ⑨ Audio (1/2) input jacks
- ⑩ 12V DC output terminal Used to trigger external devices such as an electric screen or light control, etc. Consult your dealer for how to connect these devices.
- ⑪ AC power jack
- ⑫ Ceiling mount holes
- ⑬ Kensington anti-theft lock slot
- ⑭ Projector mounting plate

Product Specifications

Projection System	DLP	
Native Resolution	WXGA(1280*800)	
Brightness	3000AL	
Contrast Ratio	13,000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.53,f=5.38	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	0.37	
Image Size (Diagonal)	64"~120"	
Zoom Ratio	Fix	
Lamp Type	240W	
Lamp(Normal/Economic/SmartEco Mode)*	3500/5000/7000 hours	
Keystone Adjustment	1D,Vertical +/- 15 degrees	
Lines shift range	144% ±5%	
Projection Offset	VGA(640 x 480) to UXGA(1600 x 1200)	
Resolution Support	15~102KHz	
Horizontal Frequency	23~120Hz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin)	x 2(Shared with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x 1
	Audio in (Mini Jack)	x 2
	Audio out (Mini Jack)	x 1
	Audio L/R	x 1
	Speaker	10W x 2
	USB (Type mini B)	x 1 (FW download)
	RJ45	x 1 (LAN control)
	RS232 (DB-9pin)	x 1
	IR Receiver	x 2
Dimensions	Dimensions(W x H x D)	339*236,9*322.8mm
	Weight	6.2KG(w/o wall mount)
Power	Power Supply	AC100 to 240V, 50 to 60 Hz
	Power Consumption	typical 330W, standby power <0.5W
Audible Noise	36/30 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	

* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Logistics information

Product Code	9HJCC77.13E
EAN Code	471 8755 05317 7
Dimensions Single Carton (cm)	61 x 53 x 36.20
Carton Weight (kg)	12,1
Pallet Qty	10



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax: +31 88 8889299

© 2014 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301



Because it matters