



Work Big LP70+

InFocus

Work Big LP70+

Don't let it out of your sight.

People wonder why they never see you without your mobile InFocus Work Big LP70+. Those people have obviously never attended one of your riveting presentations. Once they've witnessed how easily this lightweight projector's 1500 powerful lumens flood any room, anywhere with vibrant color and unparalleled clarity while integrating data, video and audio, they'll suddenly get the big picture. Then they'll want all that convenience, flexibility and brilliance for themselves. Yet another reason they'll never see you without your LP70+.

Play with your projector.

Change rooms. Change offices. Change cities. No matter where you are and what you're presenting, the incredibly portable, full-featured LP70+ is right there with you, waiting to make yet another stunning impression.

It's never been easier to make an impact on the fly:

- Hook up in seconds for seamless connectivity.
- Access common functions with the integrated keypad.
- Enjoy crisp images, full color and an amazing 1100:1 contrast ratio with the latest digital processing technology from Texas Instruments.®






Projection distances

| Distance | | Min. Diagonal Image Size Throw Ratio*: 1:82 | | Max. Diagonal Image Size Throw Ratio*: 1:51 | |
|----------|--------|--|--------|--|--------|
| Feet | Meters | Feet | Meters | Feet | Meters |
| 5.0 | 1.5 | 2.7 | 0.8 | 3.4 | 1.0 |
| 10.0 | 3.0 | 5.3 | 1.6 | 6.8 | 2.1 |
| 15.0 | 4.6 | 8.0 | 2.4 | 10.1 | 3.1 |
| 20.0 | 6.1 | 10.6 | 3.2 | 13.5 | 4.1 |
| 30.0 | 9.1 | 16.0 | 4.9 | 20.3 | 6.2 |
| 32.8 | 10.0 | 17.5 | 5.3 | 22.2 | 6.8 |

*Diagonal throw ratio = (distance/diagonal image size);
Horizontal throw ratio = (distance/horizontal image size)

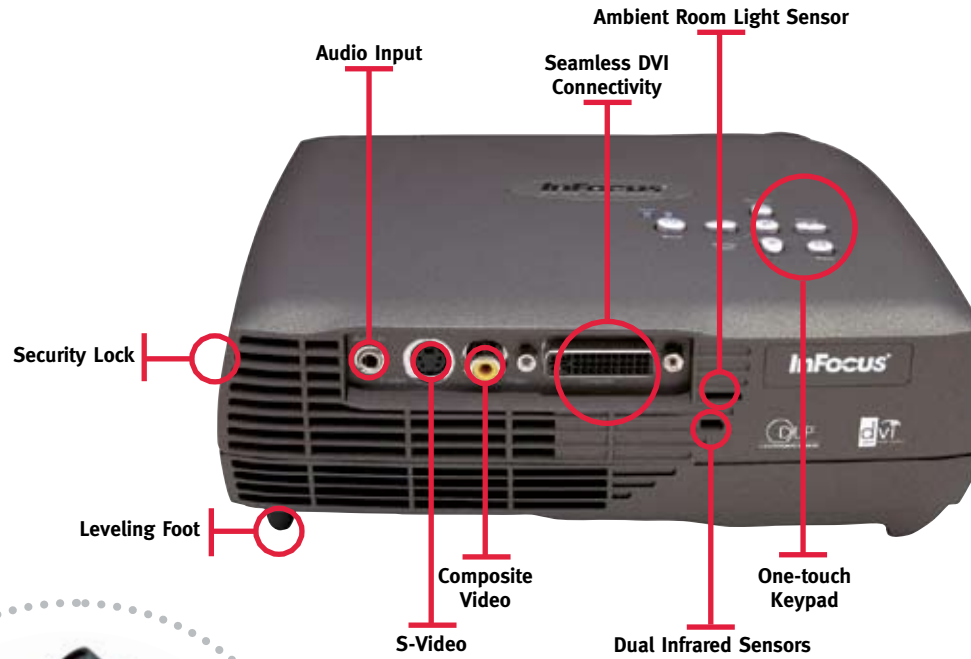

Enduring Quality

If you're happy, InFocus is happy. That's why every InFocus projector comes with a standard two-year limited factory warranty (including parts and labor) and a 90-day lamp-replacement warranty.

Ships standard with

- Wireless Navigator IR Remote Control (including batteries)
- Power cord (national and regional variants)
- M1-A analog computer cable with USB
- Composite video cable
- Audio cable
- Projector System CD
- Multi-language User Guide, Quick Start Guide, ProjectorManager control software, ProjectorManager Installation Guide, ProjectorManager User Guide
- Quick Start Card
- Lens cap
- User Guide
- Safety instructions/warnings

Optional Accessories

Projection Screens
Performance Cables
Enhanced Remote Controls
Universal Travel Cases

For more information about the LP70+, any InFocus business projector, optional accessories, or service programs please visit: www.infocus.com



INFOCUS TECHNICAL SPECIFICATIONS*

| | |
|-----------------------------|--|
| Native Resolution | XGA 1024 x 768 |
| Display Technology | DLP® by Texas Instruments®; 0.7" XGA DMD DDR |
| Input Sources | Computer (M1-DA), video (S-Video and RCA), audio (3.5mm mini jack) |
| Compatibility/Formats | VGA through SXGA, 1152, Macintosh® |
| Video Compatibility | NTSC, PAL, SECAM, EDTV (480p, 576p), HDTV (720p, 1080i) |
| Brightness | 1500 max ANSI lumens |
| Contrast Ratio | 1100:1 full on/full off |
| Lamp | 120W UHP/4000 Hours* |
| Digital Keystone Correction | +/- 15° vertical; data/video |
| Image Offset | 110% (+/- 5%) |
| Projection Lens | Zoom Lens with manual focus and manual zoom adjust |
| Zoom Ratio | 1.27:1 |
| Throw Ratio | 1.85 – 2.35:1 |
| Aspect Ratio | 4:3 (standard); 16:9 video, data |
| Audible Noise | 32dB |
| Number of Colors | 16.7 million |
| Image size (diagonal) | 2.7'/0.8m (min) – 22.2'/6.8m (max) |
| Projection Methods | Front, rear |
| Audio | 1.0 watt speaker |
| Control | Projector keypad; IR remote control; Wired control through USB |
| Dimensions | 2.5" (H) x 6.1" (L) x 7.8" (W) |
| (maximum dimensions) | 63.4 mm (H) x 148.8 mm (L) x 199.0 mm (W) |
| Weight (standard) | 2.4 lbs (1.1 kg) |
| Power Supply | 100V – 240V at 50 – 60 Hz |
| Power Consumption | 155W |
| H-Synch Range | 15 – 100 kHz |
| V-Synch Range | 43.5 – 130 Hz |
| Pixel Clock | 12 – 135 MHz |
| Operating Temperature | 5° – 35° C at sea level (0' to 10,000'); 45° – 95° F |
| Menu Languages | English, Norwegian, Spanish, Italian, Portuguese, German, French, Chinese (simple), Chinese (traditional), Japanese |
| Approvals | FCC A (US/Canada), S-JQA (Japan), PSE (Japan), CCC (China), IRAM (Argentina), GOST (Russia), UL & cUL (US/Canada), TUV GS (Germany), NOM (Mexico), MIC (Korea), C-Tick (Australia) |
| Lamp Warranty | 90 days |
| Product Warranty | 2 year standard parts and labor, 90 days on accessories |

† InFocus reserves the right to alter product offerings and specifications at any time without notice.

* Actual lamp life may vary based on the ambient environment. Conditions that may affect lamp life include temperature, altitude, and rapidly switching the projector on and off.

InFocus Corporate Headquarters:
27700B SW Parkway Avenue
Wilsonville, Oregon 97070-9215, USA
Phone: 503-685-8888
1-800-294-6400
Fax: 503-685-8887

In Europe:
Strawinskylaan 585
1077 XX Amsterdam
The Netherlands
Phone: (31) 20 5792000
Fax: (31) 20 5792999
Freephone: 008000 4636287 (008000 INFOCUS)

In Asia:
#07-01, Tanglin Shopping Centre
19 Tanglin Road
Singapore 247909
Phone: (65) 6334-9005
Fax: (65) 6333-4525