



**Work Big x2**

..... InFocus

# Work Big x2



## Lets talk business.

The InFocus Work Big X2 is all business. This stylish but sturdy digital projector is built to work as hard as you do in every setting where your company needs to shine. The X2 projects large, high contrast images with unmatched color fidelity. It connects easily to your laptop, PDA, or just about any business use digital source. You'll find it an invaluable business tool that says quality to vendors, prospects, clients and colleagues alike. The X2 is a surefire way to get any audience, anywhere to perk up and pay attention.

### Give them the business so you'll get their business

Give them crisp images and full color with the latest DLP® technology from Texas Instruments® and an amazing 2000:1 contrast ratio. Get a long-life lamp that shines for an incredible 4000 hours. Just sit back and watch as the X2's powerful zoom lens with manual focus and zoom adjust fills any wall or screen with 1700 lumens of brilliance. Yes, the X2 takes care of business.

### Ease of use

No more fumbling with cables and switches that seem left over from the last century. Awkward moments will become fading memories. The X2 is affordable but that doesn't mean it's junk. It's easy to use because it's well engineered. It uses breakthrough technology that will make you the envy of any geek. You'll be cool, calm, and collected as you introduce that new product intro or kick off a sales meeting.

A few examples:

- Enjoy setup in a snap with a simple keypad and full-featured remote control.
- Hook up in seconds with color-coded ports and cables.
- Its easy portability makes it a natural for taking your show on the road.
- An icon-based menu allows you to quickly scroll and select your settings in your choice of 12 languages — without interrupting the show.






## Projection distances

Distance	Min. Diagonal Image Size		Max. Diagonal Image Size		
	Throw Ratio*: 1.82		Throw Ratio*: 1.51		
Feet	Meters	Feet	Meters	Feet	Meters
5.0	1.5	2.7	0.8	3.3	1.0
10.0	3.0	5.5	1.6	6.6	2.0
15.0	4.6	8.2	2.5	9.9	3.0
20.0	6.1	11.0	3.4	13.2	4.0
30.0	9.1	16.5	5.0	19.9	6.0
32.8	10.0	18.0'	5.5	21.7	6.6

Distance	Min. Horizontal Image Size		Max. Horizontal Image Size		
	Throw Ratio*: 2.27		Throw Ratio*: 1.89		
Feet	Meters	Feet	Meters	Feet	Meters
5.0	1.5	2.2	0.7	2.6	0.8
10.0	3.0	4.4	1.3	5.3	1.6
15.0	4.6	6.6	2.0	7.9	2.4
20.0	6.1	8.8	2.7	10.6	3.2
30.0	9.1	13.2	4.0	15.9	4.8
32.8	10.0	14.4	4.4	17.4	5.3

\*Diagonal throw ratio = (distance/diagonal image size); Horizontal throw ratio = (distance/horizontal image size)

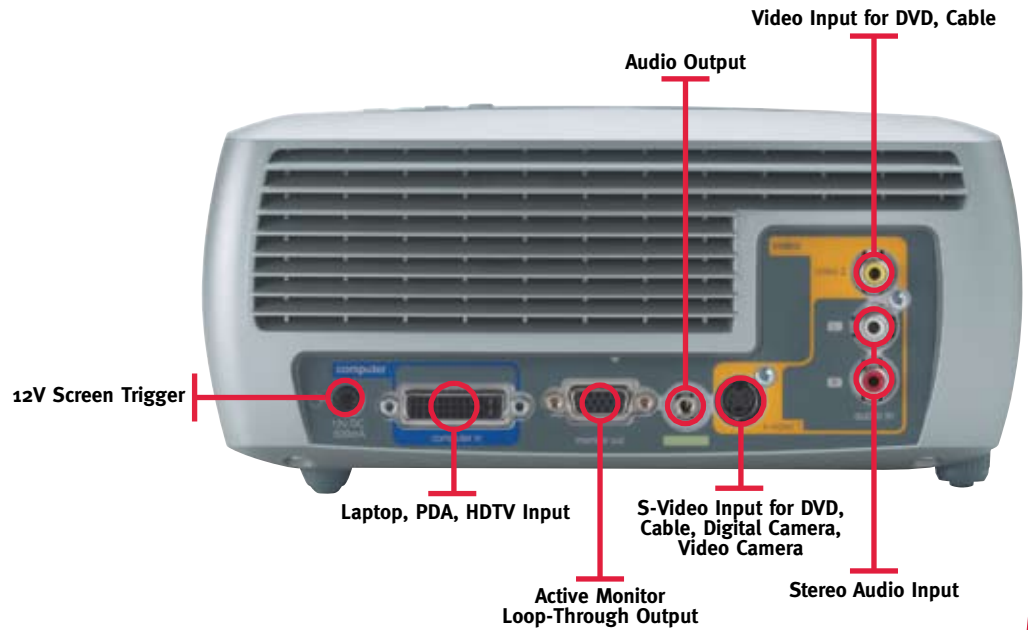

## Enduring Quality

If you're happy, InFocus is happy. That's why every InFocus projector comes with a standard one-year limited factory warranty (including parts and labor) and a 90-day lamp-replacement warranty.

## Ships standard with

- Lens Cap
- Wireless Navigator Remote Control (including batteries)
- Computer Cable
- RCA Video and Audio Cable
- Power Cord
- SCART Adapter (EMEA Only)
- Projector System CD includes: multilanguage User Guide, Quick Start Card, URL/service information/accessories aftermarket
- User Guide (printed version)
- Quick Start Card (printed version)

## Optional Accessories

- Projection Screens
- Performance Cables
- Enhanced Remote Controls
- Universal Travel Cases

For more information about the X2, any InFocus business projector, optional accessories, or service programs please visit: [www.infocus.com](http://www.infocus.com)



## INFOCUS TECHNICAL SPECIFICATIONS\*

Native Resolution	SVGA 800 x 600
Display Technology	DLP® by Texas Instruments®: 0.55" SVGA DDR DMD
Input Sources	Computer (M1-DA); Video (S-Video 4-pin mini DIN and Composite RCA); Audio (Stereo RCA)
Output Sources	Monitor Out (VESA); Audio (3.5mm)
Computer Compatibility	SVGA, VGA, XGA, Macintosh®
Video Compatibility	SDTV (NTSC, PAL, SECAM), ED/HDTV (Component, RGBHV, and DVI for these signal formats: 480p, 576p, 720p, 1080i)
Brightness	1700 max ANSI lumens (standard mode) 1100 max ANSI lumens (whisper mode)
Contrast Ratio	2000:1 full on/full off
Number of Colors	16.7 million
H-Synch Range	31.5 – 80 kHz
V-Synch Range	50 – 85 Hz
Dot Clock	20 – 95 MHz
Digital Keystone Correction	+/- 10° vertical correction; data/video
Projection Lens	Zoom lens with manual focus and manual zoom adjust
Zoom Ratio	1.2:1
Throw Ratio	1.89 to 2.27:1 (D/W), 1.51 to 1.82:1 (D/D) Minimum Projection
Distance	1.5 m (maximum distance 9.8 m)
Aspect Ratio	4:3 native, 16:9
Image size (diagonal)	2.7' to greater than 21.6' (0.8 m to greater than 6.5 m)
Projection Methods	Front, ceiling, rear
Audio	2.5-Watt mono
Control	Projector keypad; IR remote control
Lamp*	200W SHP/4000 hours
Dimensions	9.8" (W) x 12.9" (L) x 4.2" (H) 24.9cm x 32.7cm x 10.6cm
Weight	6.8 lbs./3.1 kg
Power Consumption	200 watt typical/250 watt maximum
Power Supply	100V – 240V at 50 – 60 Hz
Operating Temperature	5° to 40° C at sea level (0 to 10,000'); 41° – 104° F
Menu Languages	English, Norwegian, Spanish, Italian, Portuguese, German, French, Chinese (simple), Chinese (traditional), Japanese, Korean, Russian
Audible Noise	39 dB (standard mode) 37 dB (whisper mode)
Approvals	UL, c-UL, TUV GS, CE, GOST, C-Tick, NOM, IRAM, FCC B, CISPR22/EN55022, EN 55024/CISPR 24, CB certified according to IEC60950/EN60950: 1997, P(SE), MIC
Lamp Warranty	90 days
Product Warranty	1 year standard parts and labor, 90 days on accessories

† InFocus reserves the right to alter product offerings and specifications at any time without notice.

\* Actual lamp life may vary based on the ambient environment. Conditions that may affect lamp life include temperature, altitude, and rapidly switching the projector on and off.

**InFocus Corporate Headquarters:**  
27700B SW Parkway Avenue  
Wilsonville, Oregon 97070-9215, USA  
Phone: 503-685-8888  
1-800-294-6400  
Fax: 503-685-8887

**In Europe:**  
Strawinskylaan 585  
1077 XX Amsterdam  
The Netherlands  
Phone: (31) 20 5792000  
Fax: (31) 20 5792999  
Freephone: 008000 4636287 (008000 INFOCUS)

**In Asia:**  
#07-01, Tanglin Shopping Centre  
19 Tanglin Road  
Singapore 247909  
Phone: (65) 6334-9005  
Fax: (65) 6333-4525