



Work Big x3

..... InFocus

Work Big x3



All eyes are on you.

Your moment in the spotlight has arrived. Your business goals hang in the balance. Your audience waits to be wowed. You've prepared for a super-human presentation — a totally immersive audiovisual experience that surpasses every expectation. So of course, you've brought along your heroic sidekick, the InFocus Work Big X3 projector. You'll shine as audiences swoon for crisp, true-to-life images and vibrant colors that jump off the screen. It will also make projecting easier than it's ever been — from setup and use to storage and maintenance.

Impress tough audiences in a single bound.

Powerful. Flexible. Invaluable. The X3 incorporates the latest DLP® technology from Texas Instruments® for an amazing 2000:1 contrast ratio. Sit back and watch as the X3's mighty zoom lens with manual focus and zoom adjust fills any wall or screen with 1700 astounding lumens of brilliance — adding unexpected excitement to this year's sales trends. Yes, the X3 is particularly good at going above and beyond. A few more examples of what the X3 lets you do:

- Enjoy the clear, full-screen detail enabled by native XGA resolution.
- Connect to your laptop or PDA.
- Get the incredible value and dependability of a 4000-hour long-life lamp.





User-friendly features to the rescue.

Relieve the IT department of its projector-crisis duties. And free your mind to focus on a flawless presentation — without a single cry for technical help. The X3 projector is truly easy to use. How easy, you ask?


- Hook up in seconds with color-coded ports and cables.
- Simplify every process with the intuitive remote control.
- Use the interactive display to ensure smooth, glitch-proof presentations and receive instant status updates.
- Access common functions with the integrated keypad.

Projection distances

Distance	Min. Diagonal Image Size Throw Ratio*: 1:82				Max. Diagonal Image Size Throw Ratio*: 1.51	
	Feet	Meters	Feet	Meters	Feet	Meters
5.0	1.5	2.7	0.8	3.3	1.0	
10.0	3.0	5.5	1.6	6.6	2.0	
15.0	4.6	8.2	2.5	9.9	3.0	
20.0	6.1	11.0	3.4	13.2	4.0	
30.0	9.1	16.5	5.0	19.9	6.0	
32.8	10.0	18.0'	5.5	21.7	6.6	

Distance	Min. Horizontal Image Size Throw Ratio*: 2.27				Max. Horizontal Image Size Throw Ratio*: 1.89	
	Feet	Meters	Feet	Meters	Feet	Meters
5.0	1.5	2.2	0.7	2.6	0.8	
10.0	3.0	4.4	1.3	5.3	1.6	
15.0	4.6	6.6	2.0	7.9	2.4	
20.0	6.1	8.8	2.7	10.6	3.2	
30.0	9.1	13.2	4.0	15.9	4.8	
32.8	10.0	14.4	4.4	17.4	5.3	

*Diagonal throw ratio = (distance/diagonal image size); Horizontal throw ratio = (distance/horizontal image size)

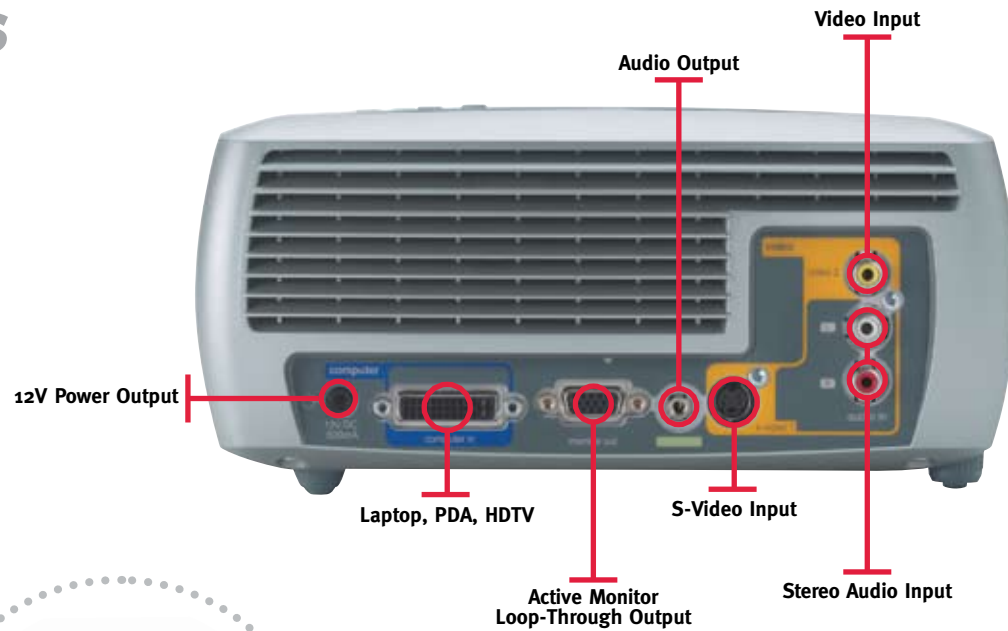

Enduring Quality

If you're happy, InFocus is happy. That's why every InFocus projector comes with a standard one-year limited factory warranty (including parts and labor) and a 90-day lamp-replacement warranty.

Ships standard with

- Lens Cap
- Wireless Navigator Remote Control (including batteries)
- M1-A Computer Cable
- RCA Video and Audio Cable
- Power Cord
- SCART Adapter (EMEA Only)
- Projector System CD includes: multi-language User Guide, Quick Start Card, URL/service information/accessories aftermarket
- User Guide (printed version)
- Quick Start Card (printed version)

Optional Accessories

- Projection Screens
- Performance Cables
- Enhanced Remote Controls
- Universal Travel Cases

For more information about the X3, any InFocus business projector, optional accessories, or service programs please visit: www.infocus.com



INFOCUS TECHNICAL SPECIFICATIONS†

Native Resolution	XGA 1024 x 768
Display Technology	DLP® by Texas Instruments®; 0.55" XGA DDR DMD
Input Sources	Computer (M1-DA); Video (S-Video 4-pin mini DIN and Composite RCA); Audio (Stereo RCA)
Output Sources	Monitor Out (VESA); Audio (3.5mm)
Computer Compatibility	VGA, SVGA, XGA, SXGA, Macintosh®
Video Compatibility	SDTV (NTSC, PAL, SECAM), ED/HDTV (Component, RGBHV, and DVI for these signal formats: 480p, 576p, 720p, 1080i)
Brightness	1700 max ANSI lumens
Contrast Ratio	2000:1 full on/full off (data mode)
Number of Colors	16.7 million
H-Synch Range	31.5 – 80 kHz
V-Synch Range	50 – 85 Hz
Dot Clock	20 – 95 MHz
Digital Keystone Correction	+/- 10° vertical correction; data/video
Projection Lens	Zoom lens with manual focus and manual zoom adjust
Zoom Ratio	1.2:1
Throw Ratio	1.89 to 2.27:1 (D/W), 1.51 to 1.82:1 (D/D)
Minimum Projection Distance	2 m (maximum distance 9.8 m)
Aspect Ratio	4:3 (native), 16:9
Image size (diagonal)	3.6' to greater than 22' (1.1 m to greater than 6.7 m)
Projection Methods	Front, ceiling, rear
Audio	2.5-Watt mono
Control	Projector keypad; IR remote control
Lamp*	200W SHP/4000 hours
Dimensions	9.8" (W) x 12.9" (L) x 4.2" (H) 24.9cm x 32.7cm x 10.6cm
Weight	6.8 lbs/3.1 kg
Power Consumption	200 watt typical/250 watt maximum
Power Supply	100V – 240V at 50 – 60 Hz
Operating Temperature	5° to 40° C at sea level (0 to 10,000'); 41° – 104° F
Menu Languages	English, Norwegian, Spanish, Italian, Portuguese, German, French, Chinese (simple), Chinese (traditional), Japanese, Korean, Russian
Audible Noise	39 dB (standard mode) 37 dB (whisper mode)
Approvals	UL, c-UL, TUV GS, CE, GOST, C-Tick, NOM, IRAM, FCC B, CISPR22/EN55022, EN 55024/CISPR 24, CB certified according to IEC60950/EN60950: 1997, P(SE), MIC
Lamp Warranty	90 days
Product Warranty	1 year standard parts and labor, 90 days on accessories

† InFocus reserves the right to alter product offerings and specifications at any time without notice.

* Actual lamp life may vary based on the ambient environment. Conditions that may affect lamp life include temperature, altitude, and rapidly switching the projector on and off.

InFocus Corporate Headquarters:
27700B SW Parkway Avenue
Wilsonville, Oregon 97070-9215, USA
Phone: 503-685-8888
1-800-294-6400
Fax: 503-685-8887

In Europe:
Strawinskylaan 585
1077 XX Amsterdam
The Netherlands
Phone: (31) 20 5792000
Fax: (31) 20 5792999
Freephone: 008000 4636287 (008000 INFOCUS)

In Asia:
#07-01, Tanglin Shopping Centre
19 Tanglin Road
Singapore 247909
Phone: (65) 6334-9005
Fax: (65) 6333-4525