

The trusty sidekick,
For delivering
messages that last.



NEW

SL6U

MOBILE SVGA PROJECTOR

5000h

Long Life Lamp
with lamp low mode

1700lm

Brightness

1.9m

Short Throw Lens (60")





SL6U

MOBILE SVGA PROJECTOR




Specifications

Model	SL6U
Display technology	0.6"Polysilicon TFL LCD×3
Resolution	480,000pixels×3(total 1,440,000pixels), 600video lines
Brightness	1700lm
Contrast	400 : 1(on/off)
Picture Size	40" ~ 300"(100"=3.0m)
Source lamp	160W (Shut Off Time 5000Hrs) with Low Mode 200W (Shut Off Time 2000Hrs)
Computer compatibility	640×400~1024×768 True: 800×600, Sync on green available
Video compatibility	NTSC/NTSC4.43/PAL(including PAL-M, N)/ SECAM/PAL-60 Component Video(480i,576i,480p, 576p,720p,1080i), SCART(RGB+1V sync)
PC input terminals	PC: mini D-sub 15pin×1
Video input terminals	Video: RCA×1+S-video×1, Audio: RCA (L,R)×1
Output terminals	RGB: mini D-sub 15pin×1,
Communication terminals	RS-232C(8pin)×1,(USB terminal for mouse control×1)
Audio speaker	2W mono
Dimension (W×H×D)	275×70×261mm (excluding height adjustment)
Weight	2.7kg / 5.9lbs
Power supply	AC100 - 240V / ±10%, 50/60Hz
Optional lamp	VLT-SL6LP


*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Input and Output Terminals

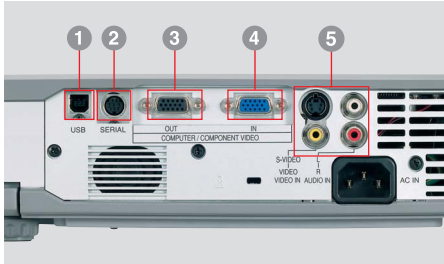


- 1 USB terminal for mouse control
- 2 Serial terminal RS-232C(8pin)
- 3 PC / Component Video output (mini D-sub 15pin)
- 4 PC / Component Video input (mini D-sub 15pin)
- 5 S-Video / Video / Audio input

Dimensions

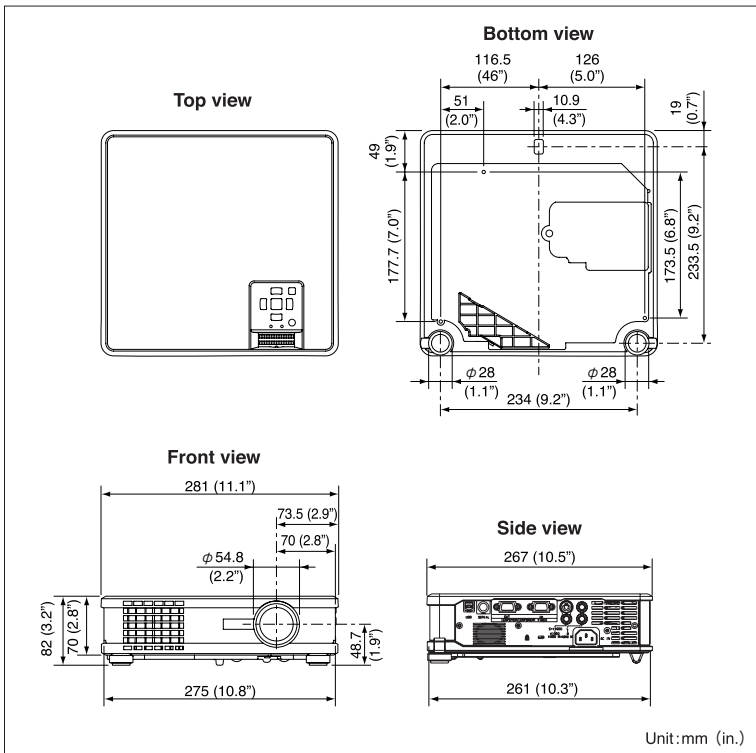

Screen size and Projection distance

As seen from the side

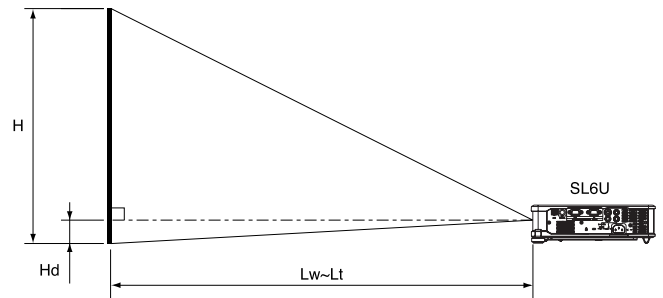

Screen size chart (4:3 aspect ratio)

Screen		Distance from screen (L)				High projected image (Hd)					
Diagonal size	Width (W)	Height (H)	Maximum Zoom	Minimum Zoom	inch	cm	inch	cm			
40	102	32	81	24	61	47	1.2	56	1.4	2.2	5
60	152	48	122	36	91	71	1.8	85	2.2	3.2	8
80	203	64	163	48	122	95	2.4	114	2.9	4.3	11
100	254	80	203	60	152	119	3.0	143	3.6	5.4	14
150	381	120	305	90	229	178	4.5	215	5.5	8.1	21
200	508	160	406	120	305	238	6.0	287	7.3	10.8	27
250	635	200	508	150	381	298	7.6	359	9.1	13.5	34
300	762	240	610	180	457	358	9.1	-	-	16.2	41

The above numbers are approximate, and may be slightly different from the actual measurements.

MITSUBISHI ELECTRIC CORPORATION
 HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

To find out more about SL6U and our projectors, visit us at

Global.MitsubishiElectric.com/projectors/