



Quiet, Lightweight DLP® Projector for Vivid Presentations

- Bright, **1800 lumens** for brilliant displays
- Contrast of **2000:1** for supreme image clarity and great video
- Full connectivity, **VGA**, SCART and Component via adaptor, S-Video and Composite
- Exceptionally **Quiet 27dB** for near silent presentations
- **Password security** and **Timer mode** for increased protection and versatility
- Ultra portable **lightweight**, only **1.9Kg**
- **RS232** for Communication Control Systems
- **Remote Control** with keys for input sources for easy switching

EP706

Digital DLP® Projector



Preset Modes – The best performance for all Occasions

Presentation: For computer or notebook

Bright: For brightness optimization

Movie: For home theatre

sRGB: Best colour reproduction

User: Memorises user's settings


Specifications

Display Technology	0.55" Double Data Rate (DDR) SVGA DLP® Technology Texas Instruments
Weight	1.9 Kg
Resolution	Native: SVGA 800 x 600 up to 1280 x 1024 SXGA compressed
Brightness	1800 ANSI Lumens
Contrast Ratio	2000:1
Dimensions (W x H x D)	230 x 95 x 210mm
Lamp Life*	3000 hours
Noise Level	27dB
INPUTS	15 Pin D-Sub VGA (SCART and Component via adaptor) S-Video 4 Pin Mini Din Composite RCA Jack
CONTROL	RS232
Aspect Ratio	4:3 Native, 16:9 compatible
Keystone Correction	± 16° degrees Vertical
On Screen Display	13 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Norwegian and Danish
Video Compatibility	PAL SECAM 625/576i/p, NTSC 525/480i/p, HD 720p/1080i
Uniformity	85%
Displayable Colours	16.7 Million
Projection Lens	f=21.83 ~ 23.81, F/2.35 ~ 2.47, 1.1x Manual Focus
Throw Ratio	1.93 ~ 2.13:1 (Projection Distance : Image Width)
Projection Distance	1.2 - 12m
Image Size	0.78 - 7.78m (31" to 306") Diagonal 4:3
Horizontal Scan Rate	31.5 - 68.7 KHz
Vertical Scan Rate	56 - 85 Hz
Lamp Type	180 watt SHP
Power Supply	100 - 240 V, 50 - 60 Hz
Power Consumption	260 W Maximum, Standby Mode < 12w
Operating Conditions	Operating: 5 - 35° C, 80% Humidity (Max), 3000m Altitude (Max)
Remote Control	Infra-Red with direct Source selecting
Security	One Kensington Lock Port
Standard Accessories	Lens Cover, AC Power Cord, VGA Cable, Composite Video Cable, SCART adaptor, Infra-Red Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card
RoHS	Compliant

EP706 Projection Distance 1.2 - 12m (4:3 Aspect Ratio)

Projection Distance (m)	Max. Horizontal Image size (m)	Min. Horizontal Image size (m)	Max. Screen Height (m)	Min. Screen Height (m)	Max. Diagonal Image Size (m)	Max. Diagonal Size (inch)	Max Image Offset (m)
1.20	0.62	0.56	0.47	0.42	0.78	30.63	0.07
2.00	1.04	0.94	0.78	0.71	1.30	51.04	0.12
2.50	1.30	1.17	0.97	0.88	1.62	63.80	0.15
3.00	1.55	1.41	1.17	1.06	1.94	76.57	0.18
4.00	2.07	1.88	1.56	1.41	2.59	102.09	0.23
5.00	2.59	2.35	1.95	1.76	3.24	127.61	0.29
6.00	3.11	2.82	2.34	2.12	3.89	153.13	0.35
7.00	3.63	3.29	2.73	2.47	4.54	178.65	0.41
8.00	4.15	3.76	3.12	2.82	5.19	204.17	0.47
9.00	4.66	4.23	3.51	3.18	5.83	229.70	0.53
10.00	5.18	4.69	3.90	3.53	6.48	255.22	0.58
11.00	5.70	5.16	4.29	3.88	7.13	280.74	0.64
12.00	6.22	5.63	4.67	4.24	7.78	306.26	0.70

EP706 is capable of 16:9 aspect ratio projection. When projecting a 16:9 image the image sizes, screen height and offset information will differ to that of above.

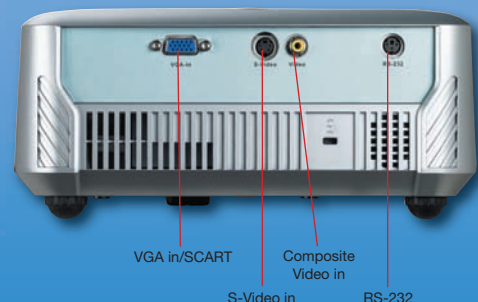

Optoma recommends Panoview screens

Panoview

www.panoview.eu

42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ

Optoma Europe Ltd.

www.optomaeurope.com

*Typical lamp life achieved through testing. Will vary according to operational use and environment conditions.

Copyright © 2006, Optoma Europe Ltd. All other product names and company names used herein are for identifications purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. DLP® and the DLP logo are registered trademarks of Texas Instruments.