

# TOSHIBA

performance **s9**



u n b e a t a b l e v a l u e

2000:1 Contrast Ratio

1500 Ansi Lumens

SVGA

DLP™ Technology



Why settle for less when the S9 offers you great value for money all in one box.

At 1500 ANSI Lumens and with an incredible 2000:1 contrast ratio, the DLP™ powered S9 ensures that images are bright and vibrant. Also featured on this model is TrueVision™, an integrated video scalar and de-Interlacer, guaranteeing breathtaking moving images that are both crisp and clear.

Being compact and lightweight you can take the S9 wherever your audience demands, and its auto image set up and intuitive icon driven on screen menus make it very easy to operate.

Completely versatile the S9 is also ceiling mountable and rear projection compatible and boasts a low cost of ownership with up to 3000 hour lamp life and 3 year warranty.

Whether you are within the education sector, SMB market, or even a dedicated gamer you will be impressed by the S9.

### Projection Distance

SCREEN SIZE	Screen Size	40"	60"	80"	100"	150"	200"	250"
	Horizontal (m)	0.81	1.22	1.63	2.03	3.05	4.06	5.08
Vertical (m)	0.61	0.91	1.22	1.52	2.29	3.05	3.81	
DISTANCE	Minimum (metres)	1.50	2.20	2.90	3.60	5.50	7.30	9.10
	Maximum (metres)	1.70	2.60	3.50	4.40	6.50	8.70	11.00

### Box Contents

Operating manual & CD-ROM,  
RGB lead, Power cable,  
Remote control, Batteries,  
Carry Bag



### Key Features


Integrated Scalar / De-interlacer  
Icon driven menu system  
Switchable 16:9 and 4:3 formats  
Audio In  
One Button Auto-Setup  
14 Language menu support  
Eco Mode  
Ideal for both Video and Data  
Auto Input search

### Technical Specifications

Model		S9	
Display	Display Type	DLP™	
	Shape	Aspect Ratio	4:3 (16:9 Switchable)
		Size	0.55" SVGA panel x 1
	Number Of Pixels	480,000 pixels (800x600)	
	Drive Method	DDR 12 degree (DDP2000)	
	Contrast Ratio	2000:1	
	Resolution	Real SVGA	
Upgraded Video Processing	TrueVision De-Interlacing™		
Image	Brightness (ANSI)	1500 lm	
	Lamp	200W / 160W (Eco) - TLPLS9	
	Service Life of Lamp **	2000h / 3000h (Eco mode)	
	Colour Reproduction	16.7 Million Colours	
	Colour Wheel (DLP)	Segments (Qty)	RGBW 4 Segment
		Speed	2X
	Projection distance (m)	1.2 - 10.0m (3.9 - 32.8ft)	
	Picture Size (Diagonal)	0.76 - 7.0m (30 - 275")	
	Projection Method	Front, Rear, or Ceiling	
	Keystone Correction	Vertical	Digital +/-15 degrees
Horizontal		None	
Lens	Optical zoom and Focus Methods	Manual Zoom & Focus	
	"F" Value Aperture	F = 2.5	
	"f" Value Focal length (mm)	f = 20.2 - 24.2mm	
	Zoom Ratio	1.2 x	
	Throw Ratio	1.43 - 1.72 :1	
Signal	Compatible Frequency	Horizontal (KHz)	31 - 79kHz
		Vertical (Hz)	50 - 85Hz
	Input Signals	Video Signal	NTSC / PAL / SECAM
		Colour Difference	480i/480p/576i/576p/1080i/720p
		RGB Real Display	VGA / SVGA
RGB Compressed	XGA / SXGA / UXGA		
Terminals	Input	Video Signal	1x RCA, 1x S-Video
		Computer Signal	1 x RGB
		Audio Signal	1 x Stereo Mini Jack
		Control and Other	USB
	Output	None	
General	Operating Noise	32dB (Eco)	
	Embedded Speaker	2W Mono	
	Weight (kg)	2.4kg	
	Dimensions W x D x H (mm)	256 x 200 x 88	
	Power source	AC100-240V, 50 / 60Hz	
	Power Consumption (W)	250W	
	Security	Kensington Slot	
Warranty	Projector	3 Year RTB	
	Lamp	90 Days	

\*\* Actual lamp life may vary based on ambient environment

### Connections

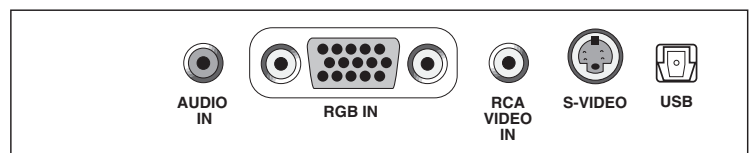

# TOSHIBA

TOSHIBA INFORMATION SYSTEMS (U.K.) LTD.  
Projection and Display Technology  
Toshiba Court, Weybridge Business Park,  
Addlestone Road, Weybridge, Surrey KT15 2UL

[www.toshiba.co.uk/projectors](http://www.toshiba.co.uk/projectors)