

EPSON®

EXCEED YOUR VISION

Epson EMP 83/822

Performance, reliability and control in the boardroom or meeting room


These powerful, affordable corporate projectors combine stunning quality with extensive networking and connectivity. Easy to set up and operate, with a range of energy saving features, they are perfect high performance presenting partners.

Key benefits:

- Powerful 7W speaker for clear audio in larger rooms
- Peace of mind with security bar, lock and password protection
- Simple maintenance with Easy-Grab Air Filter and easy lamp change
- High efficiency – low wattage lamp lasts up to 4000 hours



Seamless connection to your corporate network

Connect your Epson EMP-822 or Epson EMP-83 directly to your corporate network for remote projector management, maintenance and control.

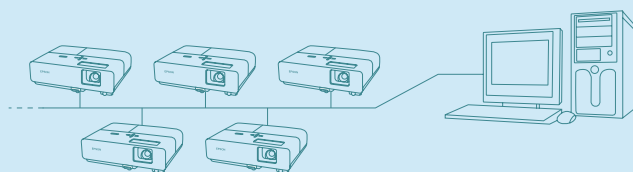

Fully featured for ceiling mounting

Enhanced connectivity options means that you can simultaneously connect several sources to the projector; whilst Epson's Direct On and Direct Off functions mean that you can turn the projector on & off simply by turning on or off the power! No need to wait for cool down or standby!





Direct On / Direct Off

Save yourself money, and the environment!

Thanks to Epson's exclusive and patented ETORL lamp technology, low-wattage lamps can be used even for bright output; and coupled with these models' low power consumption you are sure to save money and stay ecologically friendly!



Model	Epson EMP-83	Epson EMP-822
Projection system	0.63-inch without MLA (x3) TFT	0.63-inch with MLA (x3) TFT
Native resolution	XGA (1024x768)	XGA (1024x768)
Brightness	2200 ANSI lm / 1600 ANSI lm (High/Low brightness mode)	2600 ANSI lm / 2080 ANSI lm (High/Low brightness mode)
Contrast	400:1	400:1
Weight	2.9 kg	2.9 kg
Dimension (DxWxH)	245 x 327 x 92 mm (Excluding feet)	245 x 327 x 92 mm (Excluding feet)
Fan noise		
High brightness	35 dB	35 dB
Low brightness mode	28 dB	28 dB
Projection lens	Manual Focus and 1.2x optical zoom F=1.60-1.74 / F=18.40-22.12 mm	Manual Focus and 1.2x optical zoom F=1.60-1.74 / F=18.40-22.12 mm
Lamp		
Type / life	170W UHE / 4000 hours (3000h at high brightness mode)	170W UHE / 4000 hours (3000h at high brightness mode)
Screen size (Projected distance)	30 to 300 inch (0.84 to 10.42m)	30 to 300 inch (0.84 to 10.42m)
Colour reproduction	Full-colour (16.77 million colours)	Full-colour (16.77 million colours)
Keystone correction	Vertical: -30 to +30 degrees Auto Keystone Correction	Vertical: -30 to +30 degrees Auto Keystone Correction
AV mute slide	Yes	Yes
Instant off	Yes	Yes
Input		
Video	D-sub 15-pin x2, RCA x1, S-Video x1	D-sub 15-pin x2, RCA x1, S-Video x1
Computer	RGB x2	RGB x2
Audio	Stereo mini-jack x 2	Stereo mini-jack x 2
Output		
Computer	D-sub 15-pin x1	D-sub 15-pin x1
Audio	Stereo mini-jack	Stereo mini-jack
Speaker output	7 W monaural	7 W monaural
Control	RS-232C	RS-232C
Network	LAN(RJ45) x 1	LAN(RJ45) x 1
Operating temperature / altitude	5°C to 35°C/0 to 2,286m	5°C to 35°C/0 to 2,286m
Power supply	100 – 240 V AC ±10%, 50/60 Hz	100 – 240 V AC ±10%, 50/60 Hz
Power consumption	100 – 240 V AC 50/60 Hz 2.8 – 1.2 A	100 – 240 V AC 50/60 Hz 2.8 – 1.2 A
Other functions	Direct Power On/Off, Source Search, Auto Detection of RGB, Operation Panel Protected Function, 7 Colour Modes, High Altitude Mode, Theft Proof (Security bar), Kensington Lock, User logo, Freeze, E-Zoom, Help	Direct Power On/Off, Source Search, Auto Detection of RGB, Operation Panel Protected Function, 7 Colour Modes, High Altitude Mode, Theft Proof (Security bar), Kensington Lock, User logo, Freeze, E-Zoom, Help
OSD language	24 languages	24 languages
Network performance		
Function	Projector control and projector management via network SNMP Web control PJ-Link	Projector control and projector management via network SNMP Web control PJ-Link
Software	EMP Monitor (for Windows) Epson IP Link Projector Control (for Windows)	EMP Monitor (for Windows) Epson IP Link Projector Control (for Windows)
Supplied accessories		
Power cable	3m	3m
Computer cable	1.8m D-sub 15pin (Male) – D-sub 15pin (Male)	1.8m D-sub 15pin (Male) – D-sub 15pin (Male)
Remote control	Attached with battery	Attached with battery
Bundled software	Epson Projector Software (CD-ROM)	Epson Projector Software (CD-ROM)
Password protect sticker	Attached	Attached
User's manual set	Attached	Attached

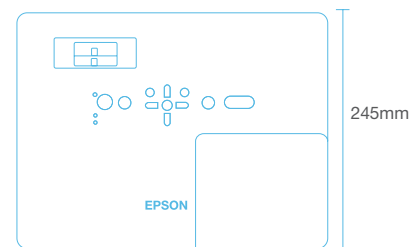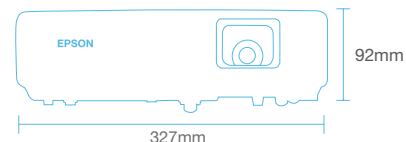

Epson EMP-83/822



For further information please contact your local Epson office or visit www.epson-europe.com
Austria 0810/20 01 13 (0,07 €/Min.) Belgium 070/350120 (0.1735 €/min.) Czech 800/142 052
Denmark 44 50 85 85 Finland 0201 552 091 France 0892 899 999 (0,34 €/min) Germany 01805/23 41 10 (0,14 €/Min.)
Greece 210-8099499 Hungary 06800 147 83 Ireland 1 800 409132 Italy 02-660321 10 (0,12 €/min.) Luxembourg
900/43010 (0,24 €/min.) Middle East +9714 8818934 Netherlands 0900-5050808 (0,05 €/oproep + 0,15 €/min.)
Norway 22 06 42 80 Poland 0-0-800 4911299 (0,16 zł/min.) Portugal 707 222 111 Russia (095) 777-03-55 Slovakia
0850 111 429 South Africa (+2711) 465-9621 Spain 93 582 15 00 Sweden 0771-400135 (Mobilsamtal – 0,99 kr/min,
Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,89 kr/min) Switzerland 0848 448820 (4-8 cent./min.)
Turkey (0212) 3360303 United Kingdom 0870 416900

Entry carrying out management and coordination pursuant to article 2497 bis of Civil Code: Epson Europe BV

EPSON® is a registered trademark of Seiko EPSON® Corporation. All other product names and other company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice.

EPSON®