

ED-X15



EDUCATION NETWORK PROJECTOR


The ED-X15 Hitachi's 3LCD educational projector is highly compact and affordable. It delivers high performance, excellent connectivity and impressive functionality. The ED-X15 comes with a market leading range of security features which are effective, reliable and user-friendly.

- 1500 ANSI Lumens
- Full Connectivity
- Quick Start and Instant Off
- Auto Vertical Keystone
- Input Source Naming
- My Button
- Networking
- Whiteboard Mode and Blackboard Mode
- Anti Theft Features:
 - Pin-lock
 - MyScreen Lock
 - Transition Detector




HITACHI
Inspire the Next

ED-X15

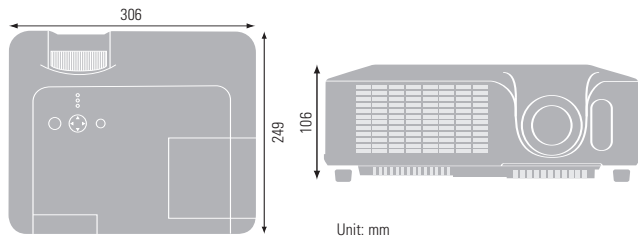

Unit: mm

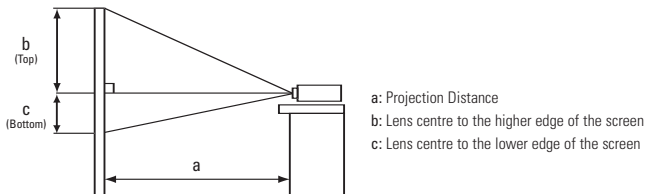

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.2	1.4	55	6
60" (1.5)	1.8	2.1	82	9
100" (2.5)	3.0	3.6	137	15
150" (3.8)	4.5	5.4	206	23
200" (5.1)	6.0	7.2	274	30
300" (7.6)	9.0	10.8	411	46

ED-X15 Technical Specifications

OPTICAL

LCD Panel		0.63" P-Si TFT x 3
Resolution		XGA: 1024 dots x 768 lines
Brightness	Normal Mode	1500 ANSI Lumens
	Bright Mode	2000 ANSI Lumens
Contrast Ratio		500:1
Lens		F1.7 -1.9, f=18.9 ~ 22.6mm, Manual Zoom x 1.2
Lamp		200W UHB
Projection Distance		0.9 - 9.0 m (WIDE), 1.1 - 10.8 m (TELE)
Distance to Width Ratio (:1)		1.52 (WIDE), 1.7 (TELE)
Diagonal Display Size		30-300" (60"@1.8m, Wide)
Number of Colour		8 Bit/colour, 16.7M colours
Keystone		9:1upward shift, fixed

COMPATIBILITY

Computer Compatibility		IBM Compatible VGA, SVGA, XGA, SXGA, UXGA Capability, MAC 16" (Pixelworks chip)
Video Compatibility		NTSC/PAL/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@60Hz), 1125i(1080i@50/60Hz)
Plug & Play		DCC2B
Frequency Range		FV 56-120Hz, FH 31.5-106kHz

FEATURES

Speakers		1W x 1
Other:		Freeze, Magnifying, Blank, Auto adjustment, Search, Page Up & Down (for USB mouse function), Equalising Gamma Correction, Colour Balance, 2-3 pull down, Progressive Scan, Auto V keystone, My Screen, My Memory, My Button, blackboard/whiteboard mode, input source naming (English), Easy Lamp replace from Top, Easy Filter Change with sliding system, Serial Number label on side, Quick ON (3 sec target), Direct ON, Direct Off, Security Bar, PIN Lock, MyScreen PIN lock, Keypad Lock, Kensington slot, Transition Detector, Controlling & Monitoring, WEB control, e-shot, scheduling function

CONNECTIONS

Computer Input		15-pin Mini D-sub x 2
Computer Output		15-pin Mini D-sub x 1 (independence from RGB input)
Video Input		RCA Jack x 1
		S-Video Jack x 1
Audio Input		RCA Jack x 3 for Component
		Stereo Mini Jack x 2
		RCA (L/R) x 1 pair (Selectable on OSD)
Audio Output		Stereo Mini Jack x 1
Control and Mouse		9-pin D-sub x 1 for RS232 control
		USB type B x 1 for mouse control
Networking		Controlling & Monitoring, WEB control, e-shot, scheduling function (RJ-45)

POWER

Power Supply		100-120/220-240V, 50/60Hz Auto Switching
Power Consumption		330W

PHYSICAL

Dimensions (W x H x D)		306 x 106 x 249mm (excluding feet and extrusions)
Weight		3.3kg
Noise Level		37dB (Bright Mode)/32dB (Normal Mode)
Air Filter		Polyurethane

MISCELLANEOUS

Lamp indicator light, Power light, Ceiling Mount image, Rear Projection Image

CERTIFICATION

UL60950/C-UL, FCC Part 15, Class B, CE, EN60950, WEEE

ACCESSORIES SUPPLIED

Remote Control with batteries, RGB Cable, Power Cord, Quick Guide, User Manual (English, French, German, Spanish, Italian, Norwegian, Dutch, Portuguese, Simplified Chinese, Korean, Swedish, Russian, Finnish, Polish), Video cable, Security Label

OPTIONAL ACCESSORIES

Replacement Lamp		DT00757
------------------	--	---------

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.3	1.5	51	-2
60" (1.5)	1.9	2.3	77	-2
100" (2.5)	3.2	3.9	129	-4
150" (3.8)	4.9	5.8	193	-6
200" (5.1)	6.5	7.8	257	-8
300" (7.6)	9.8	11.7	386	-12