





PLC-XL50

- Ultra-short Focus Projector: enabling an 80 inch projection from a distance of only 8.1 cm
- Brightness: 2,000 ANSI lumens
- Resolution, native: 1,024 x 768 (XGA), maximum: 1,600 x 1,200 (UXGA)
- Designed for horizontal & vertical installation
- Versatile use, including floor space projection, tabletop projection and wall-mounted projection
- Key Lock function, Pin Code Lock for security
- MyLogo Function for custom logo transfer
- Direct Power On/Off allows switching the projector on/off without delay
- Anti-theft function: audio alarm feature
- 3 years warranty, 1 year lamp warranty

PLC-XL50

TECHNICAL DETAILS	PLC-XL50
Category	Business & Education
Panel	3 x 0.8" TFT p-Si (4 : 3), micro lens
Lamp	275 W UHP (LMP-121)
Brightness in ANSI lumens	2,000
Lamp Life	3,000 h (eco mode)/2,000 h (normal mode)
Fan noise	29 dB (eco mode)/34 dB (normal mode)
Standard Lens	F = 1.85/f = 4.83 mm*
Throw Distance	-0.04 to 0.081 m
Contrast Ratio	600 : 1
Resolution in pixels	1,024 x 768 (XGA)
Image size min-max (diagonal)	60"-80"
Uniformity	80 %
Bandwidth/Frequency	140 MHz, horizontal 15-100 kHz, vertical 50-100 Hz
Colour Systems	PAL, SECAM, NTSC, NTSC4.43, PAL-M/N
Connections	Input 1: D-Sub15 (RGB/SCART RGB) Input 2: D-Sub15 (RGB) or Monitor Out Input 3: 3 x Cinch (Y-Pb/Cb-Pr/Cr) Input 4: RCA (Composite) Input 5: Mini DIN 4-pin (S-Video) Audio: 3.5 mm Stereo Jack for Computer, 2 x RCA (R/L mono) for video Audio Output : 3.5 mm Stereo Jack (variable) Control Input Jack : Mini DIN 8-pin (RS232 compatible)
Audio	2 W Mono
Keystone Correction	vertical +/-5°
HDTV Compatibility	720p/1,035i/1,080i
Computer Compatibility	UXGA/SXGA/WXGA/XGA/SVGA/VGA
Zoom/Focus	-/manual
Power Consumption/Voltage	330 W (eco mode)/390 W (normal mode)/10 W (stand-by mode)/100-240 V
Warranty	3 years, 1 year lamp (max. 1,000 h)
Dimensions (W x H x D)	374 x 197 x 495 mm
Weight	7.6 kg
Standard Accessories	Remote control, batteries, user manual (CD-ROM), power cable, D-Sub15 cable, alarm function, PIN code label, stand
Optional Accessories	SCART/VGA cable (POA-CA-SCART), remote control with laser pointer (POA-RCKIT03), Components/D-Sub15 cable (POA-CA-COMPVGA), presentation kit including mouse function (POA-RCKIT04)

* You can use the distance calculator at www.sanyo.de to determine exact image sizes and distances

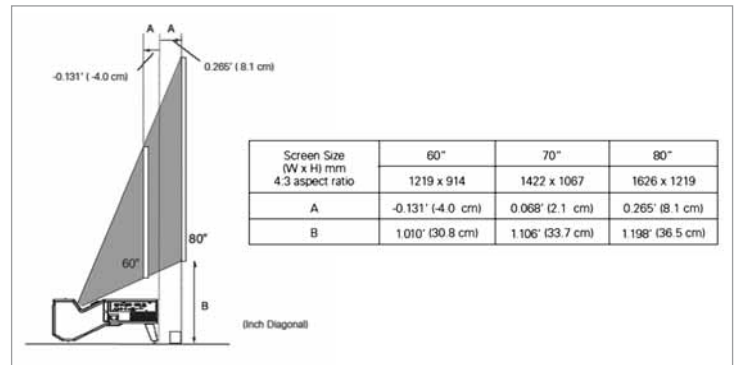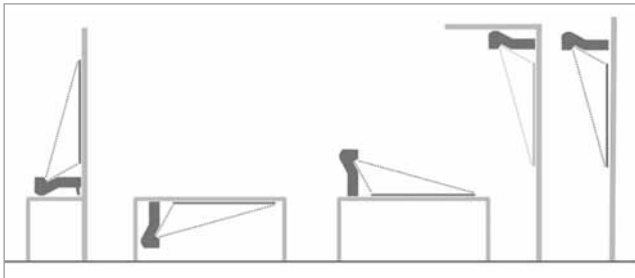

Technical specifications are subject to change without notice. Status 08/2007.

