

The lightest way to present.



- Mobil for business-presentations
- Compact and light: 1.3 kg
- BrilliantColor™
- USB-interface




DLP® and the DLP logo are registered trademarks of Texas Instruments and Brilliant Color™ is a trademark of Texas Instruments.



Display	0.55" DLP™ Chip
Resolution	XGA 1,024 x 768
Brightness	2,000 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	2,000:1
Projection format	4:3 switchable to 16:9
Lamp	200 W (TLPLP9LAMP)
Maximal lamp life	up to max. 2,000 hours/ up to max. 3,000 hours in ECO mode
Lens	F = 2.5 - 2.74 / f = 22 - 25.5, manual zoom
Zoom	1.17 x
Frequency (hor. / vertical)	15 - 100 kHz/43 - 120 Hz
Projection	front and rear
Digital keystone correction	auto vertical +/- 16°
Picture size (diagonal)	0.9 - 7.6 m
Projection distance	1.6 - 12.0 m
Input signals	NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, SXGA & UXGA (compr.)
Inputs	1 x RGB (D-sub 15), 1 x USB type A (memory/JPEG/MPEG), mini-Din S-video, composite video (RCA), audio (stereo mini jack), video/S-video audio (2 x RCA L/R), USB Reader

Outputs	-
Serial interface	-
Power supply	AC 90 - 240 V, 50/60 Hz
Loudspeaker	1 x 2 W
Dimensions (W x H x D)	210 x 65 x 165 mm
Weight	1.3 kg
Operation noise	normal 35/ECO mode 32 dB
Specials	USB, keystone correction, DDC compatible
Accessories	remote control with laserpointer and batteries, owners manual (CD ROM), RGB- and power-cable, softcase
Options	spare lamp, camera c001
Menu guidance	22 languages (EN, FR, DE, IT, ES, PT, RU, SV, TR, PL, DA, CS, HU, NL, FI, NO, EL, RO, JA, ID, ZH, KO)

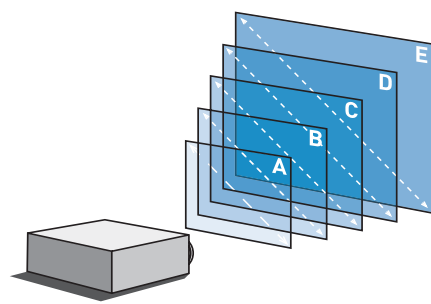

Picture size	Projection distance
A 0.40 m	1.60 - 1.90 m
B 0.80 m	3.10 - 3.70 m
C 1.00 m	3.90 - 4.60 m
D 2.00 m	7.70 - 9.10 m
E 3.00 m	11.60 - 13.70 m

