


High-Tech can be so "easy to use"



- Attractive design
- High security (password function and panellock)
- Easy set-up and "easy to use"




LCD stands for Liquid Cristal Displays  
NCE 3: Colour optimization by Toshiba  
for LCD projectors

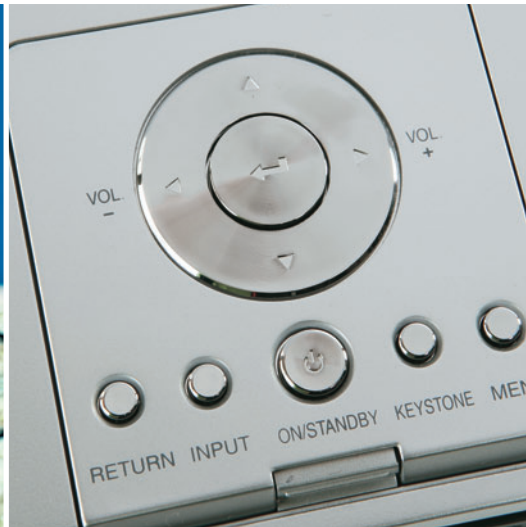

Display	0.63" LCD Chip
Resolution	XGA 1,024 x 768
Brightness	3,000 ANSI-lumens
Colour reproduction	16.7 mio. colours
Contrast	600 : 1
Projection format	4 : 3 switchable to 16 : 9
Lamp	180 W (TLPLW11LAMP)
Max. lamp life	up to max. 2,000 hours/ up to max. 3,000 hours in ECO mode
Lens	F = 1.6 - 1.89 / f = 18.6 - 22.3 mm, manual focus and zoom
Zoom	1.2 x
Frequency (hor./vert.)	16 - 106 kHz/50 - 85 Hz
Projection	front, rear and ceiling
Digital keystone correction	auto vertical +/- 30°
Picture size (diagonal)	0.84 - 7.62 m
Projection distance	1.19 - 9.13 m
Input signals	NTSC/PAL/SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA, SVGA, XGA, SXGA, UXGA (compr.)
Inputs	RGB (D-sub 15), S-video, composite video (1 x RCA), RGB audio (stereo mini jack), video/S-video audio (1 x RCA L/R)

Outputs	RGB (D-sub 15), audio (stereo mini jack)
Serial interface	RS-232C (mini DIN8 pin)
Power supply	AC 100 - 240 V, 50/60 Hz
Loudspeaker	1 W mono
Dimensions (W x H x D)	288 x 92 x 247 mm
Weight	2.8 kg
Operation noise	standard 34 dB / ECO mode 29 dB
Specials	security-function, user logo, password, panellock, NCE 3, quick start / instant shut down (5 sec.), black board-function
Accessories	mouse remote control with laserpointer and batteries, owners manual (CD ROM), quick reference, RGB and power cable, softcase
Options	ceiling mounting, trolley, spare lamp, camera c001

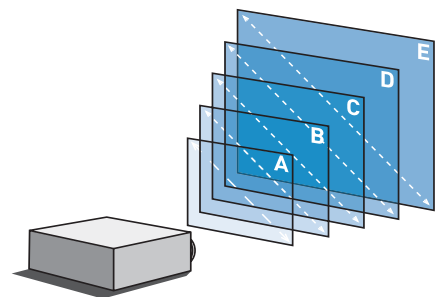

Picture size	Projection distance
A 0.84 m	1.19 m
B 1.52 m	1.8 - 2.18 m
C 2.54 m	3.02 - 3.64 m
D 5.08 m	6.08 - 7.31 m
E 7.62 m	9.13 m

