


BenQ Digital Projector


MP512 ST

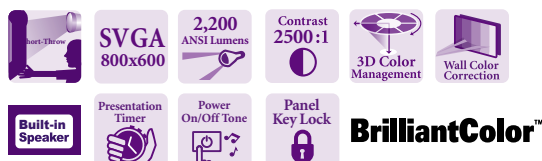

Highlights

- Short Throw Lens (Ratio 0.9)
- HDMI Connector x 1
- 5W Speaker x 2
- SVGA Native Resolution
- 2200 ANSI Lumens
- 2500:1 High Contrast Ratio
- 4000 Hours Lamp Life @ Eco
- Brilliant Color™
- 3D Color Management
- Wall Color Correction
- Closed Caption
- Standby D-Sub Output
- Baud Rate Change
- Presentation Timer
- Quick Auto Search
- Quick Cooling
- Security Password
- Resolution Reminder
- Panel Key Lock
- "Q?" Hot Key for FAQ
- Power Saving "Auto Off"
- Power On/Off Tone
- 11 Sets of Picture Mode

BenQ | Multi-function Connectors

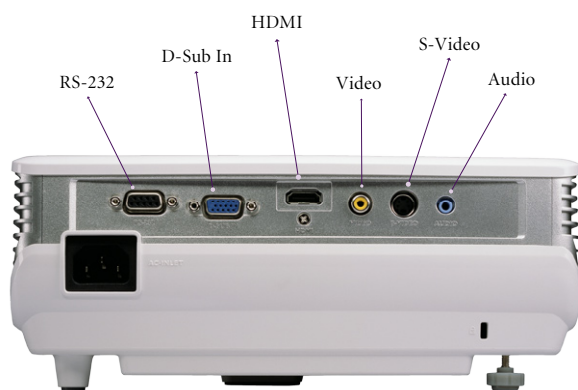

Specifications

Projection System	DLP™ technology by Texas Instruments®	
Native Resolution	SVGA (800 x 600)	
Brightness	2200 ANSI lumens	
Contrast Ratio	2500:1 (Full on/Full off)	
Aspect Ratio	4:3 Native, 16:9 Selectable	
Color	Full 16.7 million color palette	
Lens	F= 2.5 f=10mm	
Zoom Ratio	Fixed	
Image Size (Diagonal)	27.5" to 300"	
Throw Ratio	0.9:1	
Lamp	185W, 3000/4000 hours(Normal/Eco)	
Computer Compatibility	VGA(640 x 480) to SXGA(1280 x 1024)	
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-82 kHz	
Vertical Scan Rate	48-85 Hz	
Input Terminals	PC	Analog RGB: D-sub 15 pin x 1
	A/V	Digital: HDMI x 1 Component Video: D-sub 15 pin (Shared with Analog RGB connector) S-Video: Mini Din 4 pin x 1 Composite Video: RCA x 1 Audio: Stereo Mini Jack x 1
Output Terminal	Speaker 5W x 2	
Control Terminal	Serial Connector : RS232 D-sub 9 pin x 1	
Dimensions(W x H x D)	10 x 3.5 x 8.4 inch (255 x 90 x 214 mm)	
Weight	4.9 lbs (2.2 kg)	
Power Supply	100 to 240 VAC, 50 to 60 Hz	
Power Consumption	Max 280W, Standby Max 5W	
Noise Level	31/26 dB (Normal/Economic mode)	
On-Screen Display Languages	English/ French/ German/ Italian/ Spanish/ Russian/ Traditional Chinese/ Simplified Chinese/Japanese/ Korean/ Swedish/ Dutch/ Turkish/ Czech/ Portuguese / Thai/ Polish	
Picture Modes	PC Input:	A/V Input:
	Dynamic Mode Presentation Mode sRGB Mode Cinema Mode User 1 Mode User 2 Mode	Dynamic Mode Standard Mode Cinema Mode User 1 Mode User 2 Mode
Function	BrilliantColor™ 3D Color Management Wall Color Correction Quick Auto Search Time Controller Presentation Timer Closed Caption Standby D-Sub Output Baud Rate Change Resolution Reminder	Panel Key Lock "Q?" Hot Key for FAQ Power On/Off Ring Tone 11 sets of Picture Mode Auto Phase Adjustment Blank @ ECO mode Quick Cooling Auto Off Security Password High Altitude Mode
Accessories (Standard)	Quick Start Guide Manual CD Remote Control w/battery	VGA Cable PWR Cord
Accessories (Optional)	Ceiling Mounting Kit Presentation Plus	Spare Lamp Kit Soft Carry Case

*BenQ has the right to change spec without any notice.

BenQ