

Features

With built-in radio frequency receiver, cordless wall switch and single-channel transmitter for cordless remote control.

Elegant combination of modern design and ease of assembly.

Triangular support rolls away completely into case. Ideal for building-in or recessed ceilings.

Automatic stop for rolling and re-rolling guarantees long lifespan of projection screen fabric.

High-quality projection screen fabric results in flat-hanging screen for optimum image quality.


Supplied with extra high black border on top to achieve ideal viewing height. **see also page 4**

Black border increases perceived clarity of projected image.

Quiet, fast motor with 5-year guarantee and CE quality mark.

Built-in mounting brackets are covered with side covers.

Direct, easy to mount on wall, ceiling and/or in cove.

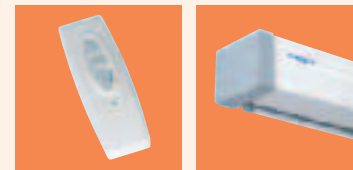

- ▲ Top quality electrically operated projection screen with built-in radio frequency remote control and an extra black border on top for optimum viewing height.

Options



- ▶ Formats video (4:3) and HDTV (16:9).

Accessories

- ▶ Ceiling brackets for mounting <> on recessed ceilings or ceilings starting at 2.8 metres high. PASEL 004 length max. 100 cm



- ▶ For the technical characteristics, see "Cinelpro electrol" (page . 12).

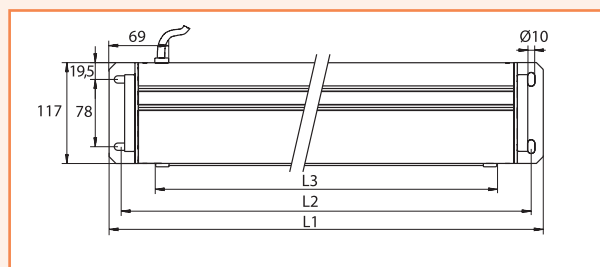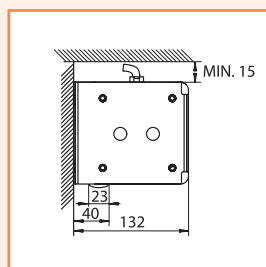

Aspect ratio	Screen size h x w cm	Viewing size h x w cm	Nominal diagonal		Case			Net weight in kg	Up/down in sec.	Screen fabric Matte white M prod. code	Max. screen fabric length in cm	Extra border in cm
			cm	inches	L1 mm	L2 mm	L3 mm					
4:3	123x160	110x146	183	72	1727	1699	1620	15	16	PSECE 101	182	62
	138x180	126x168	213	84	1927	1899	1820	17	16	PSECE 102	182	46
	153x200	143x190	254	100	2147	2119	2040	19	16	PSECE 103	182	29
	183x240	173x230	305	120	2547	2519	2440	24	16	PSECE 104	188	5
16:9	90x160	82x146	165	65	1727	1699	1620	15	16	PSECE 105	182	90
	102x180	95x168	208	82	1927	1899	1820	17	16	PSECE 106	182	77
	117x200	107x190	234	92	2147	2119	2040	19	16	PSECE 107	182	65
	139x240	129x230	269	106	2547	2519	2440	24	16	PSECE 108	188	48

For recommendations on the right screen fabric and size, see pages 4-7 or consult the interactive screen selector at www.projecta.nl.