

## Features

**Compact case with motor.**

**Integrated cord switch and plug make electric installation redundant.**

**Automatic stop for rolling and re-rolling guarantees long lifespan of projection screen fabric.**

**Black border increases perceived clarity of projected image.**

**Easy mounting on wall, ceiling and/or in cover via integrated hanging.**



▲ **Compact electrically operated projection screen available as "plug&play" model.**

## Options



- ▶ Formats standard (1:1) and video (4:3).

## Accessories

- ▶ Ceiling brackets for mounting in high rooms or under lowered system ceilings. PASAC 002 length max. 100 cm
- ▶ To prevent image distortion during OHP-projection the following are available:
  - wall brackets to place projection screen fabric under a corner PASAC 001 length 75cm
  - wall clamps to secure slat bar to the wall with slanting projection surfaces PASEL 006

## Technical characteristics

- ▶ All projection screens are designed and manufactured according to DIN 19045 parts 1-5.
- ▶ Steel case. Galvanised inner side and white powder-coated outside (RAL 9016).
- ▶ Matte white S: double-sided laminated vinyl on a woven glass fabric carrier with black backing; reflection value 1.0, viewing angle 50° L/R, weight approx. 425 gr/m<sup>2</sup> and thickness approx. 0.34 mm.
- ▶ Projection screen fabric(s) satisfy the requirements for fire-resistance of construction materials and components.
- ▶ Standard format (1:1) has a 2.5-cm black border on left/right side.
- ▶ Video format (4:3) has a 5-cm black border all around.
- ▶ All of the electrical motors comply with the following international regulations concerning product safety, electrical safety and electro-magnetic compatibility: EN 60335; IEC 61000; 89/336/EWG; 89/392/EEG and supplements : 91/638/EEG and 93/44/EEG.
- ▶ Motor with 5-year guarantee and CE quality mark.
- ▶ Somfy motor with 17 RPM (revolutions per minute) and 90 Watts.
- ▶ Integrated cable with switch is 3 metres long (CE quality mark) and plug (mains plug CEE7).

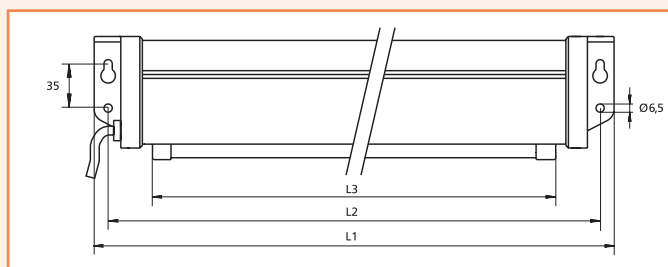

Aspect ratio	Screen size h x w cm	Viewing size h x w cm	Nominal diagonal		Case			Net weight in kg	Up/down in sec.	Screen fabric Matte white S prod. code
			cm	inches	L1 mm	L2 mm	L3 mm			
1:1	160x160	151x151			1711	1689	1620	10	27	PSECF 001
	180x180	173x173			1911	1889	1820	12	31	PSECF 002
	200x200	195x195			2131	2109	2040	14	34	PSECF 003
	240x240	230x230			2531	2509	2440	18	40	PSECF 004
4:3	123x160	110x146	183	72	1711	1689	1620	10	21	PSEFC 005
	138x180	126x168	213	84	1911	1889	1820	12	24	PSEFC 006
	153x200	143x190	254	100	2131	2109	2040	14	26	PSEFC 007
	183x240	173x230	305	120	2531	2509	2440	18	31	PSEFC 008

For recommendations on the right screen fabric and size, see pages 4-7 or consult the interactive screen selector at [www.projecta.nl](http://www.projecta.nl).