

Features


Flat steel frame projection screen fabric stretched using elastic cords.

The edge with eyeletts is equipped with additional reinforcement.

Simple mounting of projection screen fabric and frame.

Options

- ▶ Formats square (1:1) and video (4:3).

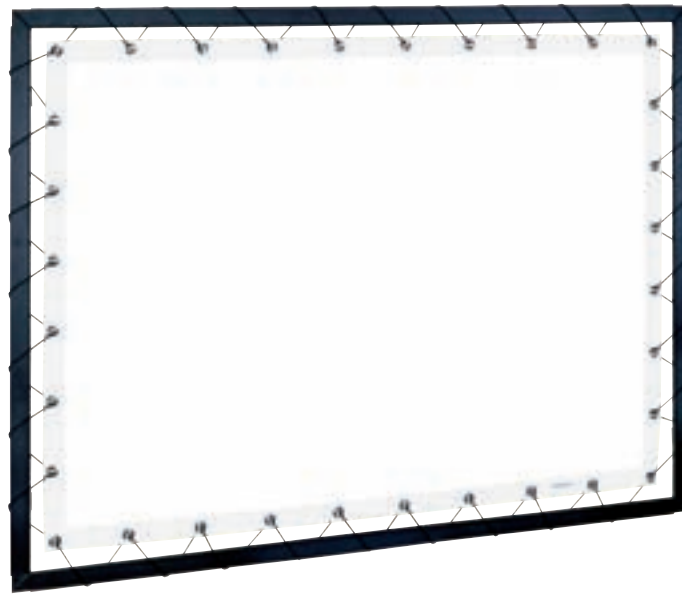

▲ Broadly applicable projection screen stretched across frame using eyeletts and elastic cords.

Technical characteristics

- ▶ Steel frame (50x30 mm) may be slid into each other. Powder coated in black.
- ▶ Elastic cords through eyeletts and around frame every 20 cm.
- ▶ From 3-metre width on top with non-elastic cords.
- ▶ Matte White P: vinyl film; gain 1.0 and viewing angle 50° L/R.
- ▶ The projection screen fabric has a horizontal seam every 1.9 metres which is invisible during projection.
- ▶ Projection screen fabrics satisfy the requirements for fire resistance of construction materials and components.

Aspect ratio	Screen size	Viewing size	Nominal diagonal		Net weight in kg	Screen fabric Matte White P prod.code
	hxw cm	hxw cm	cm	inches		
1:1	250x250	220x220			32	10530057
	270x270	240x240			34	10530058
	310x310	280x280			40	10530059
	330x330	300x300			42	10530060
4:3	210x270	180x240	305	120	30	10530061
	240x310	210x280	368	145	35	10530062
	255x330	225x300	381	150	37	10530063
	330x430	300x400	508	200	49	10530064
	405x530	375x500	610	16 feet	63	10530065
	480x630	450x600	762	20 feet	79	10530066