

Looks aren't everything!



The EP727i not only offers fantastic looks and style but also great performance. Super-bright 2500 ANSI Lumens and great XGA picture quality with striking realistic colour enhances powerful business presentations and enticing home videos.

- 2500 ANSI Lumens to highlight presentations to the finest detail
- Designer styling: light, compact at 2kg and as versatile on the move as when installed
- BrilliantColor™ and 2200:1 contrast gives exceptional colour to create crystal clear presentations and video - Optoma 5 Year Colour Guarantee*
- 5 Year Imager Guarantee providing consistent pixel performance***
- Digital and Analogue connectivity, capability includes: DVI, HDMI, 2 x VGA
- Auto power-off feature shuts down the projector when not in use, saving power and increasing lamp life
- Filter-free design for zero maintenance - No routine servicing


Easy to use:

- Fully featured remote control with laser pointer and mouse control
- 5 preset picture modes to adjust the settings to match a variety of different applications
- 15 second start-up and cool down time to reduce both time and money in energy use

- Extensive RS232 Command list for AV installations
- Password Security for added Protection
- Long Lamp Life - 3000 hours standard

BrilliantColor™ maximises colour accuracy for deeper saturated colours

Optoma guarantees colour quality will remain as new for 5 years*

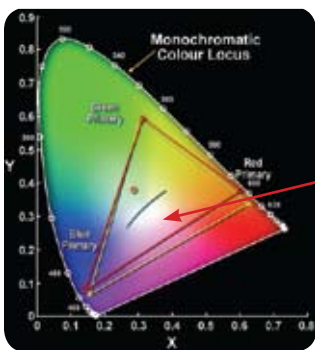

BrilliantColor™



EP727i Remote Control

- 1 Laser
- 2 Remote Mouse
- 3 Vertical Keystone Correction
- 4 Volume Control
- 5 Brightness Adjustment
- 6 AV Mute
- 7 Direct Input Source Selection

EP727i Connections

- 8 VGA Loop through
- 9 VGA In – Component & SCART via adaptor
- 10 DVI-I – HDMI and 2nd VGA via adaptor
- 11 S-Video – Composite via adaptor
- 12 Audio In
- 13 RS232
- 14 USB (remote mouse)



Specifications

	EP727i	
Native Resolution	XGA 1024 x 768	
Compressed Resolution	Up to UXGA (1600 x 1200)	
Brightness	2500/1500 ANSI Lumens (BRIGHT/STD mode)	
Contrast	2200:1	
Noise Level	30dB	
Lamp Life**	3000/2000 (STD/BRIGHT mode)	
Display Technology	Single 0.55" XGA type X DMD chip	
Weight / Dimensions (W x D x H)	2 kg / 259 x 188 x 71.5mm	
Remote Control	Remote Control : Full Function Remote with Mouse Control, Laser & Direct Source Selecting	
INPUTS:	DVI-I (HDCP)	HDMI via adaptor 2nd VGA via adaptor
	VGA In	Component via adaptor SCART via adaptor
	S-Video	Composite via adaptor
	3.5mm Stereo Jack, USB (remote mouse)	
CONTROL	RS232 3 Pin Mini DIN	
OUTPUTS:	PC 15 Pin D-Sub (monitor loop-through)	
Audio	1 x 1W Speaker	
Aspect Ratio	4:3 Native, 16:9 Compatible	
Keystone Correction	± 40 Degrees Vertical	
On Screen Display	16 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian/Danish, Hungarian, Czech & Arabic	
Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i	
Uniformity	85%	
Displayable Colours	16.7 Million	
Projection Lens	F=2.41 ~ 2.55, f=21.79 ~ 23.99mm, 1.1x Manual Focus	
Throw Ratio	1.95 ~ 2.15:1 (Projection Distance:Image Width)	
Projection Distance	1.2 - 12m	
Image Size	0.70 - 7.70m (27.49" - 303.12") Diagonal 4:3	
Horizontal / Vertical Scan Rate	15 - 100kHz / 43 - 85Hz	
Power Supply	100-240V, 50-60Hz with PFC Power Supply	
Power Consumption	237W BRIGHT mode < 10W Standby mode 211W STD mode < 10W Standby mode	
Operating Conditions	Operating: 5 - 40°C, 80% Humidity (Max), 3000m Altitude (Max)	
Security	One Kensington Lock Port, Password Protection	
Standard Accessories	Lens Cover, AC Power Cord, VGA Cable, S-Video & Composite adaptor, USB Cable, Full Function Remote, Batteries x 2, Soft Carry Bag, Quick Start Guide, CD User Manual, Warranty, WEEE Card	
RoHS	Compliant	
Lamp Warranty	6 months or 1000 hours - whichever comes sooner	
Warranty	Warranty will vary by country. Please see www.optomaeurope.com or ask your local supplier for details	
Colour Guarantee*	5 Years	

EP727i Projection Distance 1.2 - 12m (4:3 Aspect Ratio)

Projection Distance (m)	Max. Horizontal Image size (m)	Min. Horizontal Image size (m)	Max. Screen Height (m)	Min. Screen Height (m)	Max. Diagonal Image Size (m)	Max. Diagonal Image Size (Inch)	Max. Image Offset (m)
1.20	0.62	0.56	0.46	0.42	0.77	30.31	0.07
2.00	1.03	0.93	0.77	0.70	1.28	50.52	0.12
2.50	1.28	1.16	0.96	0.87	1.60	63.15	0.14
3.00	1.54	1.40	1.16	1.05	1.92	75.78	0.17
4.00	2.05	1.86	1.54	1.40	2.57	101.04	0.23
5.00	2.56	2.33	1.93	1.75	3.21	126.30	0.29
6.00	3.08	2.79	2.31	2.10	3.85	151.56	0.35
7.00	3.59	3.26	2.70	2.45	4.49	176.82	0.40
8.00	4.10	3.72	3.08	2.80	5.13	202.08	0.46
9.00	4.62	4.19	3.47	3.15	5.77	227.34	0.52
10.00	5.13	4.65	3.86	3.50	6.42	252.60	0.58
11.00	5.64	5.12	4.24	3.85	7.06	277.86	0.64
12.00	6.15	5.58	4.63	4.20	7.70	303.12	0.69

For guide purposes only

EP727i is capable of 16:9 aspect ratio projection. When projecting a 16:9 image the image sizes, screen height and offset information will differ to that of above.

Optoma recommends Panoview screens

Panoview
www.panoview.eu

42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ

Optoma Europe Ltd.
www.optoma.co.uk

* Optoma guarantees that in normal use, Optoma DLP® colour quality will be indistinguishable from when new. Please note that worn lamps will give slight variance. Exclusion: (1) Guarantee is voided if the projector is subject to damage through mis-use. (2) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is particularly excessive (3) Guarantee will not apply if lamp brightness is below 50% due to wear or if the projector is not working due to other fault. **Typical lamp life achieved through testing. Will vary according to operational use and environment conditions. Copyright © 2008, Optoma Europe Ltd. All other product names and company names used herein are for identifications purposes only and may be trademarks or registered trademarks of their respective owners. *** Optoma guarantees that in normal use, the DLP® imager guarantee will retain quality for at least 5 years providing consistent pixel performance. Exclusion: (1) Guarantee is voided if the projector is subject to damage through mis-use. (2) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is particularly excessive. Errors and omissions excepted, all specifications are subject to change without notice. DLP®, BrilliantColor™ and the DLP logo are registered trademarks of Texas Instruments.