


EW536

DLP® Projector

3D-Ready in HD

- 120Hz 3D Ready, DLP® Link™ enabled
- Widescreen presentations and HD entertainment
- 3000:1 contrast ratio for sharp, detailed presentations and graphics
- Bright projection – 2800 ANSI Lumens
- Digital and Analogue connectivity includes: HDMI, VGA
- Environmentally friendly design <1W standby mode
- Portable – carry bag provided for easy transportation
- Low ownership costs – up to 4000hrs lamp life
- DLP® filter-free design – easy maintenance

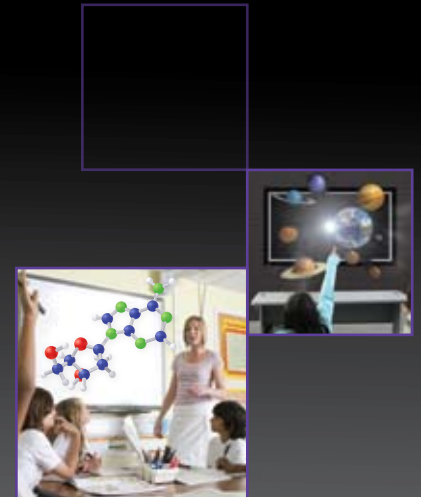

Widescreen 3D projection – Images will look so real you'll want to reach out and touch them.

The bright 2800L, EW536 with 120Hz 3D-Ready technology is ideally partnered with a widescreen notebook and HD sources. Ceiling mounted or mobile this dual-purpose projector multi-tasks in both office, school and home environments.

The environmentally friendly EW536 has energy saving features including <1W standby mode and auto power off saving you both time and money. Long lamp-life of 4000hrs combined with our unique Optoma Colour and Imager guarantees ensure hassle-free, long-lasting projection.

3D TECHNOLOGY

Using the inherent speed of DLP technology, The Optoma EW536 can output video and images at an astonishing rate of 120Hz, allowing you to show full screen, full colour, stereoscopic 3D.

The 3D effect is generated by splitting this signal into two standard video streams, one for each eye. Using DLP® Link™ technology, the 3D glasses synchronise with the image on screen to filter each stream to the correct eye. Your brain then combines the two streams to make them jump into life.



TRUE WXGA RESOLUTION

The EW536 is the perfect companion for widescreen laptops. Your presentations will appear as sharp and detailed as they do on your widescreen laptop in WXGA (1280 x 800). WXGA resolution gives 30% more pixels than XGA.



XGA



WXGA

CONTROL

The extensive RS232 command set makes it simple and easy to control the EW536 with any control system.



AMX Compatibility – Dynamic Discovery Protocol is incorporated into the EW536. This feature allows for easy installation with AMX control systems.

TRUE HDMI

Project crystal clear images using the latest HDMI v1.3 input. Hassle-free projection from a widescreen computer/HD source with a single HDMI cable – no need for separate audio cables.

CLEAR, FOCUSED IMAGES

DarkChip3™ technology from Texas Instruments produces a stunning 3000:1 contrast ratio for pin sharp graphics and crystal clear text. Crisper whites, ultra-rich blacks makes images come alive and text easier to read - ideal for business and education presentations.



1000:1 contrast ratio

3000:1 contrast ratio

[†]Simulated Image

AMAZING COLOURS

The EW536 incorporates BrilliantColor™ technology to produce stunningly bright images with perfectly balanced life-like colours.

Preset display modes allow you to achieve a perfect image on a variety of surfaces including screens and interactive whiteboards.

COLOUR AND IMAGE PERFORMANCE

Optoma guarantees colour quality will remain as new for 5 years*

Once you've purchased the EW536, Optoma guarantees that the colours will not fade and the image performance will not degrade for a minimum of 5 years.



MAINTENANCE FREE = LOWER TOTAL COST OF OWNERSHIP (TCO)

DLP® technology ensures lower cost of ownership, longer life and improved reliability compared to other technologies.



Enjoy big
bright
3D images

ENVIROMENTALLY FRIENDLY

The EW536 incorporates energy saving features to conserve power and extend the lamp life:



The timer control functions can automatically switch the projector off to standby mode <1W, conserving power and extending the lamp life to an astonishing 4000 hours**.



It takes less than 10 seconds for the projector to power up and shutdown, so the EW536 not only saves time but energy too.

FEATURES

- 6 preset display modes
- Classroom mode - 1500 ANSI Lumens
- Quick keystone correction
- Security bar and password protection for added security
- Easy to use remote with direct source control



EW536 SPECIFICATIONS

Native Resolution	WXGA 1280 x 800
Compressed Resolution	up to UXGA (1600 x 1200)
Brightness	2800/2300 Lumens (BRIGHT/STD mode)
Contrast	3000:1
Noise Level	28dB
Lamp Life*	4000/3000 (STD/BRIGHT mode)
Projection Lens	F/2.5 ~ 2.67, f=21.86 ~ 24.0mm, 1.1x Manual Zoom
Throw Ratio	1.55 - 1.7:1 (Projection Distance:Image Width)
Projection Distance	1.2 - 12m
Image Size	0.83 - 9.13m (32.77" - 359.44") Diagonal 16:10
Display Technology	Single 0.65" WXGA DC3 DMD chip DLP® Technology by Texas Instruments
Weight / Dimensions (W x D x H)	2.3 kg / 286 x 192 x 84mm
Remote Control	Full function remote with direct source selecting
INPUTS	HDMI (HDCP) - audio supported (DVI-D via adaptor) 15 Pin D-Sub VGA (SCART & Component via adaptor) S-Video 4 Pin Mini Din Composite RCA 3.5mm Audio Mini Jack
CONTROL	RS232 3 Pin Mini DIN
OUTPUTS	15 Pin D-Sub VGA (monitor loop-through) 3.5mm Audio Mini Jack
Audio	1 x 2W Speaker
Aspect Ratio	16:10 Native, 4:3 & 16:9 Compatible
Keystone Correction	± 40° Vertical
On Screen Display	18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish, Farsi & Arabic
Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i/1080p
Uniformity	85%
Displayable Colours	16.7 Million
Horizontal Scan Rate	15.3 – 91.1kHz
Vertical Scan Rate	24 – 85Hz
Power Supply	100 - 240V, 50 - 60Hz
Power Consumption	233W BRIGHT mode < 1W Standby mode 207W STD mode < 1W Standby mode
Operating Conditions	Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)
Security	One Kensington Lock Port, Password Protection
Standard Accessories	Lens Cover, AC Power Cord, VGA Cable, Carry Bag, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty, WEEE Card
RoHS	Compliant
Lamp Warranty	6 months or 1000 hours - whichever comes sooner
Warranty	Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details
Colour Guarantee*	5 Years
Imager Guarantee***	5 Years

EASY TO USE REMOTE CONTROL

EW536 Remote Control

- 1 Vertical Keystone Correction
- 2 Volume Control
- 3 Brightness Adjustment
- 4 AV Mute
- 5 Direct Input Source Selection



EW536 Connections

- 6 VGA 1 - SCART & Component
- 7 VGA Out
- 8 HDMI (audio supported)
- 9 S-Video
- 10 Composite Video
- 11 RS232 - 3 Pin
- 12 Audio In
- 13 Audio Out
- 14 Security Bar
- 15 Kensington™ Lock

Exceptional Connectivity/ Multiple Terminals



Easy to use remote with buttons to change the input sources



EW536 Projection Distance 1.2 - 12m (16:10 Aspect Ratio)							
Projection Distance (m)	Max. Horizontal Image Size (m)	Min. Horizontal Image Size (m)	Max. Vertical Image Size (m)	Min. Vertical Image Size (m)	Max Diagonal Image Size (m)	Max Diagonal Image Size (inch)	Max. Image Offset (m)
1.20	0.77	0.71	0.48	0.44	0.91	35.94	0.06
2.00	1.29	1.18	0.81	0.74	1.52	59.91	0.10
2.50	1.61	1.47	1.01	0.92	1.90	74.88	0.13
3.00	1.94	1.76	1.21	1.10	2.28	89.86	0.15
4.00	2.58	2.35	1.61	1.47	3.04	119.81	0.20
5.00	3.23	2.94	2.02	1.84	3.80	149.76	0.25
6.00	3.87	3.53	2.42	2.21	4.56	179.72	0.30
7.00	4.52	4.12	2.82	2.57	5.33	209.67	0.35
8.00	5.16	4.71	3.23	2.94	6.09	239.62	0.40
9.00	5.81	5.29	3.63	3.31	6.85	269.58	0.45
10.00	6.45	5.88	4.03	3.68	7.61	299.53	0.50
11.00	7.10	6.47	4.44	4.04	8.37	329.48	0.55
12.00	7.74	7.06	4.84	4.41	9.13	359.44	0.60

For guide purposes only
EW536 is capable of 4:3 and 16:9 aspect ratio projection. When projecting a 4:3/16:9 image the image sizes, screen height and offset information will differ from the above.

Optoma Europe Ltd.
42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ
www.optoma.eu

Panoview
Optoma recommended Screens
www.panoview.eu



*Optoma guarantees that in normal use, Optoma DLP® colour quality will be indistinguishable from when new. Please note that worn lamps will give slight variance. Exclusions: (1) Guarantee is voided if the projector is subject to damage through mis-use. (2) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is particularly excessive (3) Guarantee will not apply if lamp brightness is below 50% due to wear or if the projector is not working due to other fault. **Typical lamp life achieved through testing. Will vary according to operational use and environment conditions. *** Optoma guarantees that in normal use, the DLP® imager guarantee will retain quality for at least 5 years providing consistent pixel performance. Exclusions: (1) Guarantee is voided if the projector is subject to damage through mis-use. (2) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is particularly excessive. Copyright © 2009, Optoma Europe Ltd. All other product names and company names used herein are for identifications purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. DLP®, BrilliantColor™ and the DLP logo are registered trademarks of Texas Instruments.