Epson **EB-W10**

| WXGA | 2600 lm | kg 2.3 | 2-in-1 USB display |
| PC free | HDMI | 1 W | |

A combination of affordability, lightweight design and great functionality make this the ideal projector for any meeting room.

Keep the lights on so the audience can comfortably take notes, this projector series combines a high White and Colour Light Output (CLO) of 2,600 lumens with 3LCD technology for outstanding picture quality, natural colours and brightness.

See the bigger picture with a WXGA widescreen resolution which shows everything that's on your wide-screen PC without adjustments.

Ideal for even the smallest meeting room, users can project large images from a short distance, and easily align slides and correct distortion with automatic vertical keystone correction.

Set-up time is kept to a minimum with features such as quick-start and instant-off. Weighing in at only 2.3kgs, it is also light enough to carry between meeting rooms. The projector's exceptional value is complemented by the low-running costs of the E-TORL lamp, which lasts 5,000 hours.

For ease of use, you can display images and control the mouse from a PC or Mac with a single USB cable. Alternatively, travel light and leave the PC behind altogether thanks to the USB flash memory support. You can also enjoy enhanced sound and image with HDMI input.

KEY FEATURES

- WXGA resolution for a 30% bigger picture
- Image viewer from USB flash drive
- HDMI digital input
- Automatic vertical keystone correction
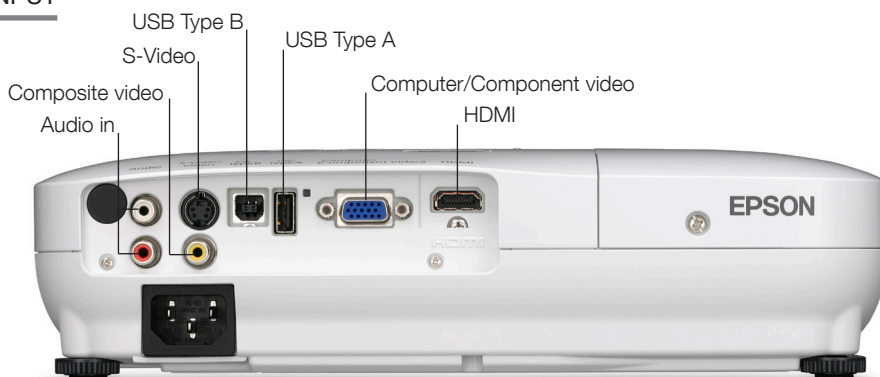- 5000 hours E-TORL long-life lamp

iF product design award 2010

INPUT

Composite video
Audio in
S-Video
USB Type B
USB Type A
Computer/Component video
HDMI

No.1 SINCE 2001

EPSON WORLD LEADER IN PROJECTORS

EPSON®

EXCEED YOUR VISION

PRODUCT SPECIFICATIONS

PROJECTION TECHNOLOGY	3LCD Technology 0.59 inch with MLA
RESOLUTION	WXGA – 1280 x 800 (16/10 aspect ratio) Up to 1080p
WHITE LIGHT OUTPUT * Normal / Eco	2600 / 2040 Lumens
COLOUR LIGHT OUTPUT * Normal / Eco	2600 / 2040 Lumens
CONTRAST	2000:1
IMAGE SIZE	33 inch to 318 inch 60-inch screen: 1.68 - 2.02m (projection distance)
THROW RATIO	1.30 - 1.56:1
ZOOM RATIO	Optical zoom 1 - 1.2
KEYSTONE CORRECTION	Automatic, Vertical ±30°
LENS TYPE F-number Focal Length Offset	 1.58 - 1.72 16.9 - 20.28mm 6:1
LAMP Life (Normal/Eco) Type	 4000 / 5000 hours 200W UHE E-TORL (ELPLP58)
VISUAL INPUT Computer Video USB memory device Digital	 1 x D-sub 15-pin, 1 x USB 2.0 type B 1 x RCA, 1 x S-Video, 1 x Component (D-sub 15-pin) 1 x USB 2.0 type A 1 x HDMI
AUDIO INPUT Computer Video Digital	 1 x RCA (White/Red) 1 x RCA (White/Red) 1 x HDMI
ADVANCED FEATURES Security Operation Display	 Padlock and security cable hole, Kensington lock hole, password protection, key lock, user logo Direct power on, instant off, quick startup, source search, JPEG-viewer, 2-in-1 USB Display (Win & Mac), easy lamp and air filter replacement 8 colour modes, e-zoom, A/V mute, freeze, Help function
LANGUAGES	English / French / German / Italian / Spanish / Dutch / Portuguese / Russian / Swedish / Norwegian / Finnish / Danish / Bulgarian / Polish / Hungarian / Czech / Slovak / Romanian / Croatian / Slovenian / Ukrainian / Catalan / Greek / Turkish / Arabic / Hebrew / Hindi / Japanese / Simplified Chinese / Traditional Chinese / Korean / Thai / Indonesian / Malay / Vietnamese
NOISE LEVEL Normal / Eco	 37dB / 29dB
SOUND	1 x 1 Watt
WEIGHT	2.3kg
DIMENSIONS	228 x 295 x 77mm
POWER CONSUMPTION Normal / Eco Standby	 265W / 220W 0.4W
SAFETY REGULATIONS	IEC 60950-1 1st edition (CE marking) EMC directive (89/336/EEC) Recycling regulations
WARRANTY	2 years on main unit; 1 year on lamp

* ISO 21118 based measurement

WHAT'S IN THE BOX

- Power cable 1.8m
- Computer cable 1.8m
- USB cable 1.8m
- Remote control and batteries
- Soft carrying case
- Password protected sticker
- User's manual set

OPTIONAL ACCESSORIES

- Spare lamp (ELPL58)
- Air Filter Set (ELPAF25)
- 80-inch Mobile screen 16:9 (ELPSC21)
- 80-inch Pull-up screen 16:10 (ELPSC24)
- Multi-aspect screen 65 inch/74 inch/ 80 inch (ELPSC26)
- Epson USB Visualiser (ELPDC06)
- Ceiling Mount (ELPMB23)
- Ceiling Pipe 450mm (ELPFP13)
- Ceiling Pipe 700mm (ELPFP14)