

W300

Bright projection

- Bright projection 3000 ANSI Lumens
- WXGA resolution, 13,000:1 contrast ratio, HDMI input
- Low ownership costs up to 10,000 hours² lamp life
- Lightweight and portable, carry bag included

















W300

Simple to connect to with HDMI connectivity the W300 is ideal for use in a meeting room or classroom. The bright 3000L with 13,000:1 contrast allows you to project bright, crystal clear images with superb colours using DLP®, BrilliantColor™ and Dynamic Eco+ technology. The W300 also provides you with energy and cost saving features with an incredible lamp life of up to 10,000 hours. It also incorporates a built in speaker, Full 3D technology and optional wireless capabilities allowing you to present wirelessly from a PC or mobile device with ease. Installed or on the move with the included carry bad, the versatile W300 is the perfect projector for all your display needs.

Green Solutions



Eco⁺ technology from Optoma increases our commitment to reducing the impact we all make on the environment

Dynamic Mode

Saving energy saves money! Dynamic Mode reduces the power consumption to as little as 30%. This intelligent feature can more than double your expected lamp life, lowering the total cost of ownership and reducing maintenance.

Power Consumption

100%

80%

Eco

30%

Eco AV Mute

Stay in control of your presentation with the Eco AV mute feature. Direct your audience's attention away from the screen by blanking the image when no longer needed. This also instantly reduces the power consumption to 25%, further prolonging the life of your lamp.





Eco AV mute off 100% power consumption

Eco AV mute on 25% power consumption

Rapid Off

It takes less than 10 seconds for the projector to power up and shutdown, saving both time and energy.

Quick Resume

Save time by not waiting for the projector to cool down before it can power up again. If the projector is accidentally turned off, this feature allows the projector to be instantly powered on again, if selected within a period of 100 seconds.



Full 3D

Using the inherent speed of DLP technology, The Optoma W300. Full 3D projector can display true 3D content form any 3D display device, such as 3D Blu-ray, PS3, Xbox and Sky3D.

Audio Performance

Built-in 2W speaker offers excellent audio support. The W300 is easy to set up without the need for costly external speakers




Brightness Where It Matters

Room lighting can be unpredictable for the business traveller; you never know what to expect. The W300 has a powerful lamp producing 3000 ANSI Lumens, so you can be sure your presentation will be bright and clear.



Cost Saving – Long Lamp Life

Reduce the number of lamp changes with lamp life of up to 10,000 hours² using the Education Cycle.

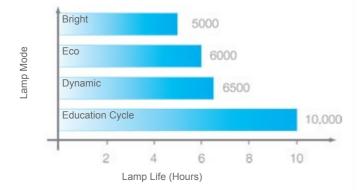

Clear, Focused Images

Produce a stunning 15,000:1 contrast ratio for pin sharp graphics and crystal clear text using the unique Dynamic mode feature.

Combined with DarkChip3 technology for Texas Instruments, Dynamic mode automatically adjusts the lamp output, based on the brightness information of each frame; to create a stunning high contrast ratio. Bright scenes are crisp and clear, while dark scenes remain detailed with deep blacks which gives exceptional light and shade detail.





2000:1 Contrast Ratio

15,000:1 Contrast Ratio

Digital Connectivity

Simple and easy – connect using a HDMI cable for a digital audio and video connection to your projector giving you a clear projected image with sound.



Wireless Presenting (optional extra)

Making presentations couldn't be easier using the optional wireless features of the W300. Using the Wireless Adapter you can connect and display presentations and video material wirelessly from a laptop, PC or mobile device.





We know that improving our products is the best way to reduce our impact on the environment. That's why at Optoma we design our products to have a long usable life, use fewer materials, ship with the minimum packaging and be free of all possible toxic substances. Naturally, energy efficiency and being recyclable are built in at the design stage. With each new product, we strive towards minimising our environmental impact.


W300 Specification

Display Technology	Single 0.56" WXGA DC3 DMD chip DLP® Technology by Texas Instruments						
Native Resolution	WXGA 1280 x 800						
Brightness ¹ (Bright Mode)	3000 ANSI Lumens						
Contrast	13,000:1						
Noise Level (Eco mode)	29dB						
Weight (kg)	2.35						
I/O Connectors							
no connectors	Inputs: HDMI (v1.4a 3D), 2 x VGA (YPbPr/RGB/Wireless), S-Video, Composite, 2 x Audio In 3.5mm						
	Outputs: VGA Out, Audio Out 3.5mm						
	Control: RS232 - 9 Pin						
Maximum Resolution	UXGA 1600 x 1200						
Computer Compatibility	UXGA, SXGA, XGA, SVGA, VGA, Mac						
Video Compatibility	PAL (B, D, G, H, I, M, N, 4.43MHz), NTSC (M, J, 3.58MHz, 4.443MHz), SECAM (B, D, G, K, K1, L, 4.25,MHz, 4.4MHz, 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz) 1080p(24/50/60Hz)						
Displayable Colours	1073.4 Million						
Projection Lens	F/2.51~2.69; f=21.95~24.18mm, 1.1x Manual Zoom						
Throw Ratio	1.55 – 1.7:1						
Projection Screen Size	0.69 – 7.62m (27.2" to 300") Diagonal 16:10						
Projection Distance	1.2 - 12m						
Zoom Type	1.1x Manual						
Aspect Ratio	16:10 Native, 16:9, 4:3 Compatible						
Offset	112.4%						
Horizontal Scan Rate	15.3 - 91.1kHz						
Vertical Scan Rate	24 - 85Hz						
Lamp Type	190W						
Keystone Correction	± 40° Vertical						
Audio	2W						
Dimensions (W x D x H)	314.6 x 222.6 x 101.7						
Remote Control	Card style remote with direct source selecting						
Power Supply	100-240V, 50-60Hz						
Power Consumption	225W BRIGHT mode < 0.5W Standby mode, 191W Eco mode < 0.5W Standby mode						
Operating Conditions	5°C - 40°C, Max. Humidity 85%, Max. Altitude 3000m						
Uniformity	80%						
Security	Security Bar, Kensington Lock, Password Protection						
Standard Accessories	Carry Bag, AC Power Cord, VGA Cable, Infra Red Remote Control with Batteries, Quick Start Card, CD User Manual, Warranty Card						
Optional Accessories	Ceiling Mount Kit, WPS						
RoHS	Compliant						
3D Support	The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems. 3D TV broadcast systems, (SKY in the UK), Blu-ray 3D™ and 3D games						
	from the Sony® PS3 or Microsoft® Xbox 360 are now supported as part of the HDMI v1.4a specification.						
3D Viewing	Requires the Optoma DLP-Link shutterglasses - available separately.						
3D Compatibility	Side-by-Side:1080i50 / 60, 720p50 / 60						
, ,	Frame-pack: 1080p24, 720p50 / 60						
	Over-Under: 1080p24, 720p50 / 60						
On Screen Display	19 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian/Danish, Hungarian, Czech, Turkish, Romanian, Farsi and Arabic.						
Optional Wireless	Yes						
Features	Up to 10,000 hours lamp life - Education Cycle						
. 0444.00	ep to repose real samp in a Education of side						

Easy To Use Remote

W300 Remote Control

- 1. Power
- 2. Source
- 3. VGA 1 / VGA 2
- 4. HDMI
- 5. Format
- 6. Up / Keystone +
- 7. Right / Volume +
- 8. Enter
- 9. Zoom
- 10. Down / Keystone -
- 11. Lamp Mode
- **12.** Mute
- 13. AV Mute
- **14.** Menu
- 15. Left / Volume -
- **16.** 3D
- 17. Video / S-Video
- 18. ReSync

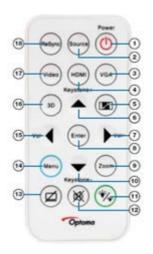

W300 Connections

- 1. S-Video
- 2. VGA Out
- 3. VGA 1
- 4. VGA 2
- 5. Video
- 6. Audio2 In
- 7. Security Bar
- 8. Audio Out
- 9. Audio1 In
- 10. RS232 9 Pin
- 11. USB (Service / Mouse)
- **12.** HDMI
- 13. Power
- 14. Kensington Lock

Exceptional Connectivity / Multiple Terminals



/300 Projection Distance 1.2 - 12m (16:10 Aspect Ratio)										
Projection Distance (m)	Max. Horizontal Image Size (m)	Min. Horizontal Image Size (m)	Max. Screen Height (m) 16:10	Min. Screen Height (m) 16:10	Min Diagonal Image Size (m) 16:10	Max Diagonal Image Size (m) 16:10	Min Diagonal Image Size (inch) 16:10	Max Diagonal Image Size (inch) 16:10		
1.20	0.77	0.71	0.48	0.44	0.83	0.91	32.77	35.94		
2.00	1.29	1.18	0.81	0.74	1.39	1.52	52.62	59.91		
2.50	1.61	1.47	1.01	0.92	1.73	1.90	68.28	74.88		
3.00	1.94	1.76	1.21	1.10	2.08	2.28	81.93	89.86		
4.00	2.58	2.35	1.61	1.47	2.77	3.04	109.81	119.81		
5.00	3.23	2.94	2.02	1.84	3.47	3.80	136.55	149.76		
6.00	3.87	3.53	2.42	2.21	4.16	4.56	163.86	179.72		
7.00	4.52	4.12	2.82	2.57	4.86	5.33	191.17	209.67		
8.00	5.16	4.71	3.23	2.94	5.55	6.09	218.48	239.62		
9.00	5.81	5.29	3.63	3.31	6.24	6.85	245.79	269.58		
10.00	6.45	5.88	4.03	3.68	6.94	7.61	273.10	299.53		
11.00	7.10	6.47	4.44	4.04	7.63	8.37	300.41	329.48		
12.00	7.74	7.06	4.84	4.41	8.32	9.13	327.72	359.44		

For guide purposes only

W300 is capable of 4:3 and 16:9 aspect ratio projection. When projecting a 4:3/16:9 image the image sizes, screen height and offset information will differ from the above.



Optoma Europe Ltd.

42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ www.optoma.co.uk

¹Brightness and lamp lifetime will vary depending on the selected projector mode, environmental conditions and usage. As is common with all lamp based projectors, brightness will decrease over the lamp lifetime. ²Typical lamp life achieved through testing and will vary according to operational use and environmental conditions. 10,000 hours lamp life is based on a daily cycle that reflects projector usage in a typical education environment. Details of this cycle are available on request. ³Optoma guarantees that in normal use, Optoma DLP® colour quality will be indistinguishable from when new. Exclusions: (a) Guarantee is voided if the projector is subject to damage through misuse. (b) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is excessive (c) Guarantee will not apply if lamp brightness is below 50% due to wear or if the projector is not working due to other faults. (d) Over time worn lamps within all projector types will show a slight colour variance. Copyright © 2013, Optoma Europe Ltd. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. DLP®, BrilliantColor™ and the DLP logo are registered trademarks of Texas Instruments. All images of products are for representation purposes only. Whilst every care is taken to provide accurate images of our products, actual products may differ slightly. Some product images may have been digitally altered by us to add an Optoma logo to the front panel. Optoma reserves the right to amend or alter actual product, product specifications or product images without notice. Some images may be simulated.

24/03/2014 10:59